


FUSES

Ø 3.6 x 10 Glass Tube Fuses

GLASS TUBE FUSE (FAST-BLOW)



SM FUSE FBMGTF(1003,1004)

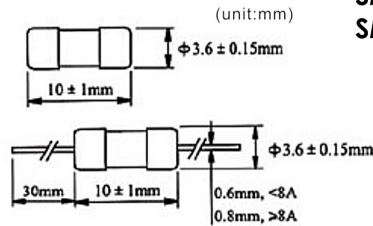


Electrical characteristics:

| RATING | | BLOWING TIME | |
|---------|-----|--------------|--|
| 1 In | Min | 4h | |
| 2 In | Max | 5s | |
| 2.75 In | Max | 300ms | |
| 4 In | Max | 30ms | |
| 10 In | Max | 4ms | |

GLASS TUBE FUSE (FAST-BLOW)




SM FUSE FBMGTF(1005,1006)

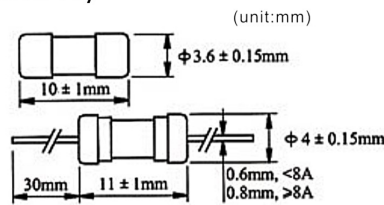

Electrical characteristics:

| RATING | | BLOWING TIME | |
|---------|-----|--------------|--|
| 1 In | Min | 4h | |
| 2 In | Max | 5s | |
| 2.75 In | Max | 300ms | |
| 4 In | Max | 30ms | |
| 10 In | Max | 4ms | |

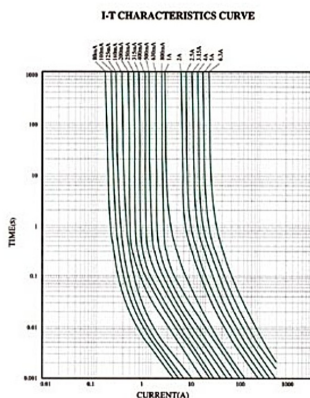

INTERRUPTING RATING:
50 amperes at 125AC (100mA-15A)
50 amperes at 250V AC (100mA-15A)

CODING KEY:

SM FUSE FBMF1003-Y-F(fast) or S(slow)
SM FUSE FBMF1004-Y-F(fast) or S(slow)
SM FUSE FBMF1005-Y-F(fast) or S(slow)
SM FUSE FBMF1006-Y-F(fast) or S(slow)
Y=Ampere Rating (1=100mA)

| Y | Ampere Rating | mv Voltage Drop | Voltage Rating | Disjunction Power |
|----|---------------|-----------------|----------------|-------------------|
| 1 | 100mA | 1750 | H/L | H/L |
| 2 | 125mA | 1500 | H/L | H/L |
| 3 | 150mA | 1500 | H/L | H/L |
| 4 | 160mA | 1500 | H/L | H/L |
| 5 | 200mA | 1500 | H/L | H/L |
| 6 | 250mA | 1000 | H/L | H/L |
| 7 | 300mA | 1000 | H/L | H/L |
| 8 | 315mA | 1000 | H/L | H/L |
| 9 | 350mA | 1000 | H/L | H/L |
| 10 | 400mA | 1000 | H/L | H/L |
| 11 | 500mA | 1000 | H/L | H/L |
| 12 | 600mA | 900 | H/L | H/L |
| 13 | 700mA | 500 | H/L | H/L |
| 14 | 750mA | 500 | H/L | H/L |
| 15 | 800mA | 275 | H/L | H/L |
| 16 | 1A | 275 | H/L | H/L |
| 17 | 1.2A | 275 | H/L | H/L |
| 18 | 1.25A | 275 | H/L | H/L |
| 19 | 1.5A | 275 | H/L | H/L |
| 20 | 1.6A | 275 | H/L | H/L |
| 21 | 1.8A | 275 | H/L | H/L |
| 22 | 2A | 250 | H/L | H/L |
| 23 | 2.5A | 250 | H/L | H/L |
| 24 | 3A | 250 | H/L | H/L |
| 25 | 3.15A | 250 | H/L | H/L |
| 26 | 3.5A | 250 | H/L | H/L |
| 27 | 4A | 225 | H/L | H/L |
| 28 | 5A | 225 | H/L | H/L |
| 29 | 6A | 225 | H/L | H/L |
| 30 | 6.3A | 200 | H/L | H/L |
| 31 | 7A | 200 | H/L | H/L |
| 32 | 8A | 200 | H/L | H/L |
| 33 | 10A | 200 | H/L | H/L |
| 34 | 12A | 180 | H/L | H/L |
| 35 | 15A | 180 | H/L | H/L |

Ampere Voltage:
H Denotes For 250V
L Denotes For 125V

Disjunction Power:
H Denotes For High Disjunction
L Denotes For Low Disjunction