
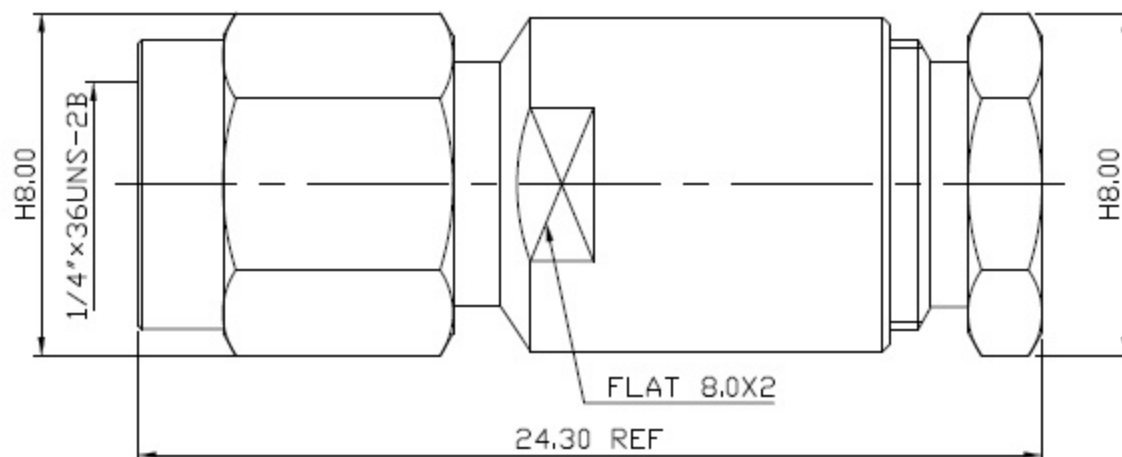


1. INTERFACE PER MIL-STD-348
2. COUPLING NUT RETENTION: 15 INCH*LBS
3. COUPLING NUT RETENTION: 60 LBS AXIAL
4. CONTACT RETENTION: 6 LBS AXIAL
5. INSULATOR RETENTION: 6 LBS AXIAL
6. DUREBILITY: TEST AFLER 100 CYCLES

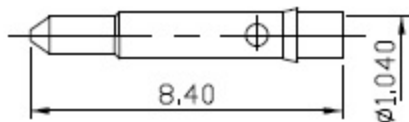

MATERIAL : BODY-BRASS
 SLEEVE-BRASS
 SI RUBBER-SILICONE
 WASHER-BRASS
 NUT-BRASS
 C WASHER-SUS 304
 SHELL-BRASS
 CONTACT-BRASS
 INSULATOR-TEFLON

FINISH : BODY-NICKEL PLATING
 SLEEVE-NICKEL PLATING
 WASHER-NICKEL PLATING
 NUT-NICKEL PLATING
 SHELL-NICKEL PLATING
 CONTACT-GOLD PLATING OVER NICKEL

DIMENSIONS ARE IN MILLIMETERS			SCHMID-M
TOLERANCE			
· × ±0.5	ANGLE ±3°	SCALE 5:1	TITLE SMA MALE STARIGHT CLAMP FOR 58u" 142u" 223u" 400u"
· × × ±0.1		REV A-2	DRAWING NO SMA-2106-TGG
· × × × ±0.05		DATE 100. 04. 09	
DRAWN		DATE	
APPROVAL		DATE	