REV	Revision Note	DATE	DRAWN	APPROVED

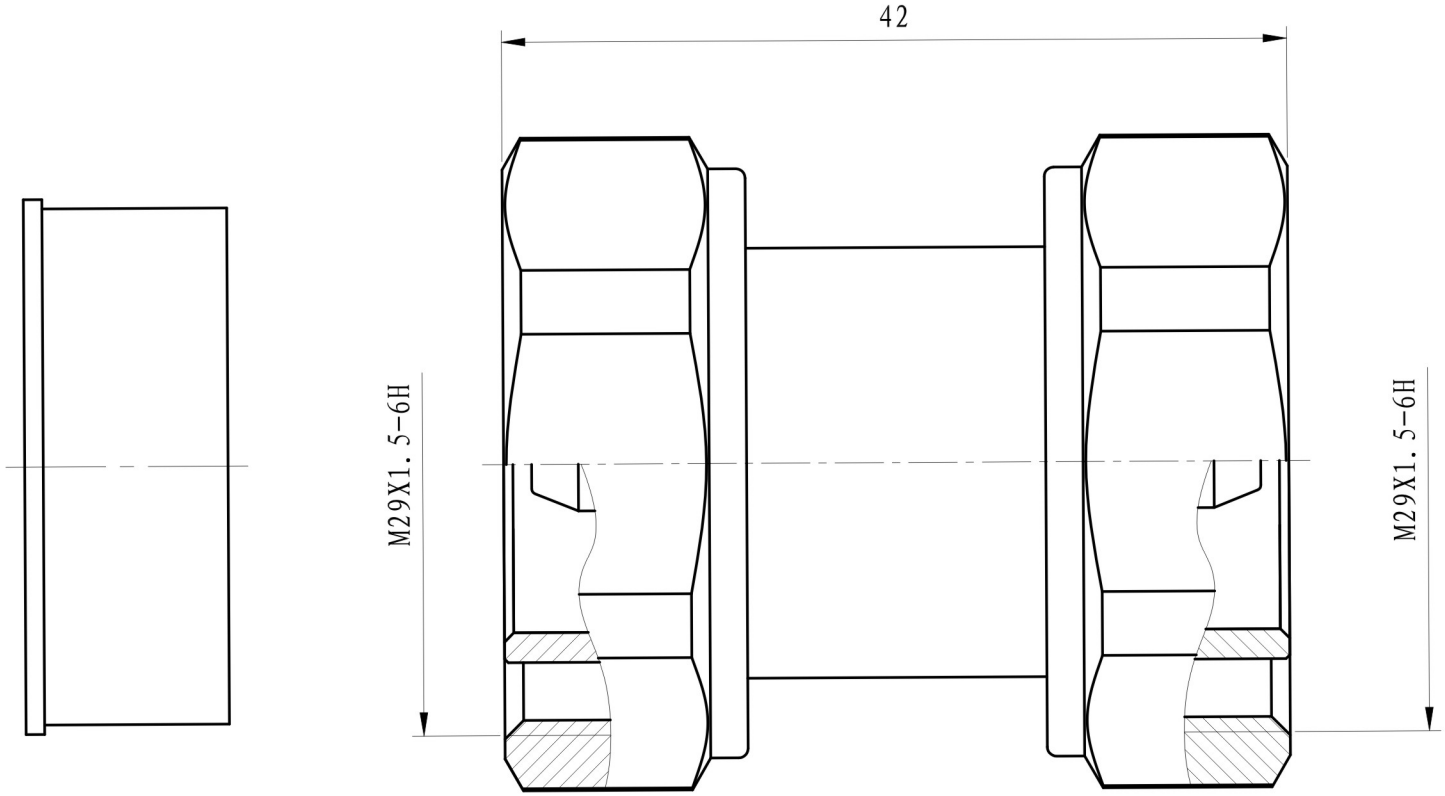

NOTES:

1. Temperature range:-55~+125°C;
2. Characteristic impedance:50Ω;
3. VSWR:≤1.1(0.3-3GHz);
4. PIM:≤-155 dBc;
5. Dielectric withstanding voltage:1500V rms;
6. Insulation resistance:≥5000MΩ;
7. Durability:500 cycles;
8. RoHs compliant.

NO.	Description	Material	Finish	Q'TY
4	Nut	Brass	Nickel	2
3	Body	Brass	Alloy	2
2	Insulators	PTFE	/	1
1	Center Contact	Brass	Silver	1

Materials and surface treatment

Unless otherwise specified tolerance	
>120～400	±1.0
>30～120	±0.6
>6～30	±0.4
0.5～6	±0.2
Ang	±1°

UNITS: mm

VIEW PROJECTION:

SCHMID-M

TITLE:	7/16 Adaptor Jack-Jack		SCALE: 1:1
Designed		DWG NO.	SHEET: 1
Checked			
Approved		PART NO. 716-603-TSS	REV: A/0
Date	11/11/2016		