
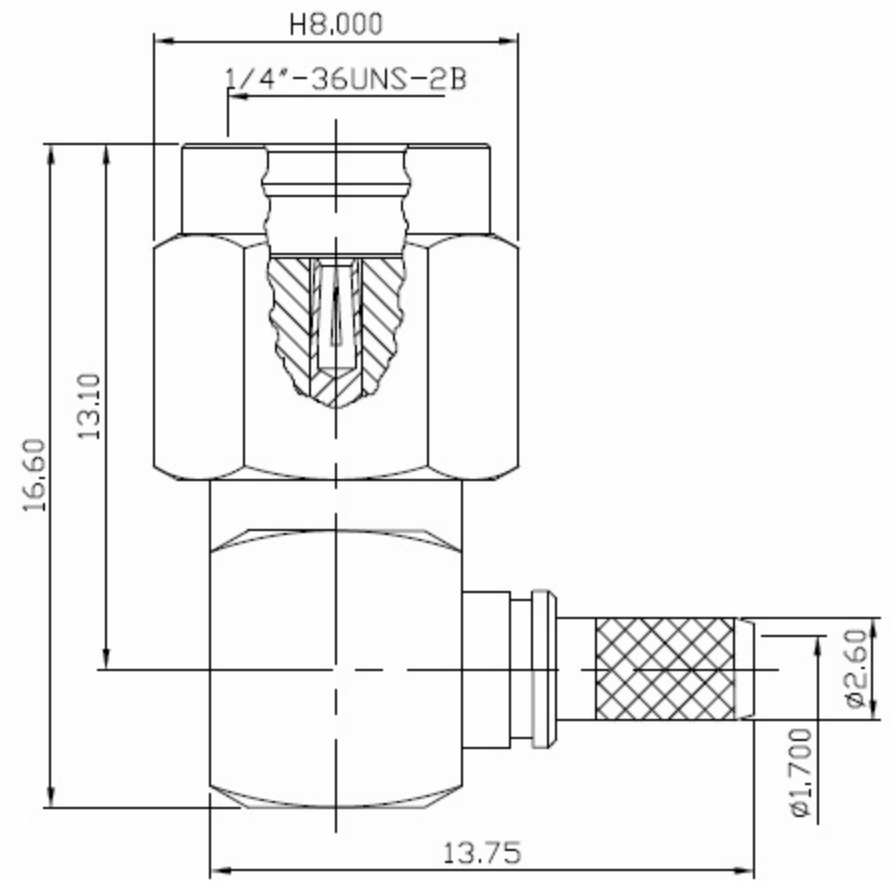


1. INTERFACE PER MIL-STD-348
2. COUPLING NUT RETENTION:15 INCH\*LBS
3. COUPLING NUT RETENTION:60 LBS AXIAL
4. CONTACT RETENTION:6 LBS AXIAL
5. INSULATOR RETENTION:6 LBS AXIAL
6. DUREBILITY: TEST AFLER 100 CYCLES

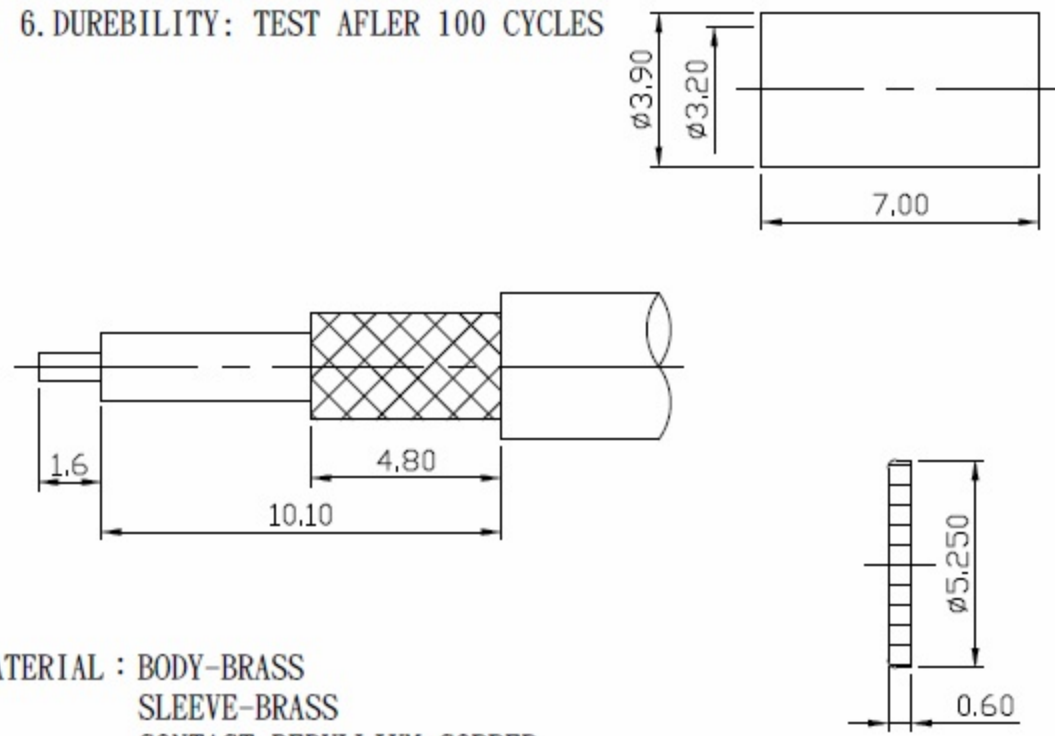

MATERIAL : BODY-BRASS  
 SLEEVE-BRASS  
 CONTACT-BERYLLIUM COPPER  
 INSULATOR-TEFLON  
 SHELL-BRASS  
 C WASHER-SUS 304  
 SI RUBBER-SILICONE  
 CAP-BRASS  
 FERRULE-BRASS

FINISH : BODY-NICKEL PLATING  
 SLEEVE-NICKEL PLATING  
 SHELL-NICKEL PLATING  
 CAP-NICKEL PLATING  
 FERRULE-NICKEL PLATING  
 CONTACT-GOLD PLATING OVER NICKEL

DIMENSIONS ARE IN MILLIMETERS		TOLERANCE		<b>SCHMID-M</b>	
· × ±0.5	ANGLE ±3°	SCALE 5:1	TITLE REVERSE POLARITY SMA R/A PLUG CRIMP FOR RG174u, RG188A/u, RG316u		
· × × ±0.1		REV A-1			
· × × × ±0.05		DRAWN	DATE 100.04.13	DRAWING NO RP-SMA-1102-TGG	
APPROVAL		DATE	FILE NO		