


# 4: Handles / Feet



## 4.1 Handles

### 4.1.1 Universal Carrying Handles

- For portable units up to 6 U
- Sturdy and light
- Easy assembly
- Carrying capacity up to 30 kg
- Lock in increments of 30°
- Operating temperature -20°C to +60°C
- Fixing material included
- **Scope of delivery:**
  - 2 side parts assembled
  - 2 raised cross recessed screws M4 x 16
  - 2 raised cross recessed screws M5 x 16
  - 2 press-in nuts M4
  - 4 caps
- Cross bar see 4.1.1.1

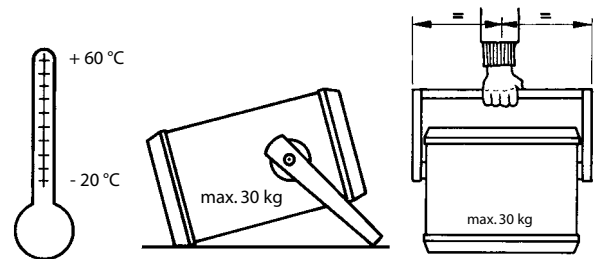

### 4.1.1 Universal Carrying Handles

Description	Material	Colour	Part-No.
Side arm assembled	Glass fiber reinforced plastic	Stone-grey	61-160-50
		Black (Ral 9005)	61-160-60

#### 4.1.1.1 Cross Bars

- Aluminium, coated (sofffeel)
- **Scope of delivery:**
  - 1 handle extrusion

Description	Front	Length L	Part-No.
Handle extrusion	M5 x 15	266.4	66-308-20
	M5 x 15	373.1	66-308-21
	M5 x 15	479.8	66-308-23
	Ø 4.2 mm	1000	66-308-40

