


Standard	UL	VDE
Rated voltage	300V	320V
Rated current	15A	20A
Withstanding voltage	AC2500V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	5.00/5.08/7.50/7.62mm (.197")	
Poles	2P, 3P --- Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

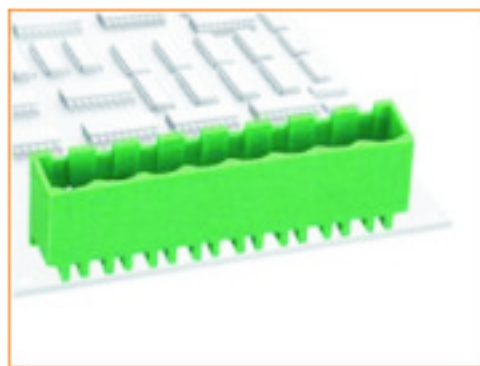

RoHS Compliant		<b>SCHMID-M</b>	
APPD.	SCALE	TOLERANCE	PART NAME
DWG. HELGA	UNIT	XX ± 0.25 X ± 0.25 ANL ±	Pluggable Terminal Block PCB Straight 5.08mm Green XX: No. Poles
DATE 2013/10	M M	SIZE A 4	PART NO.
PAGE 1 OF 1	REV C		SM C09 0583 XX SOC