
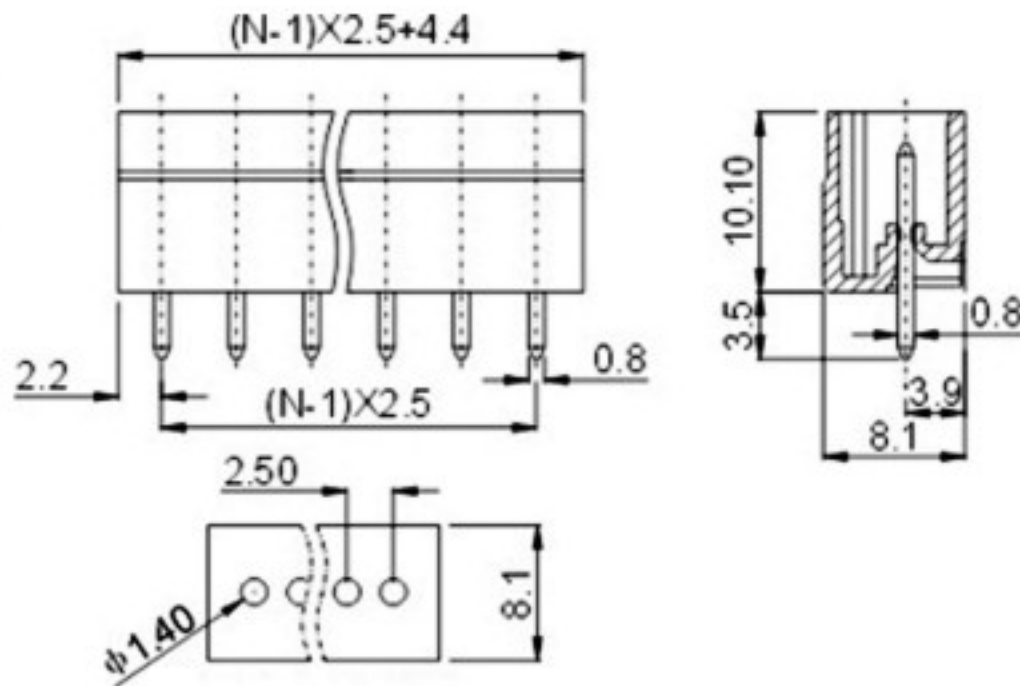


Standard	UL	VDE
Rated voltage	150V	250V
Rated current	4A	5A
Withstanding voltage		
Ambient temperature	(-)40°C to +105°C	
Pitch	2.50mm(.150")	
Poles	2P, 3P --- Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

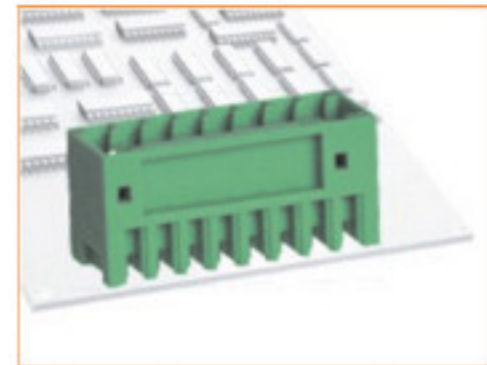

RoHS Compliant		SCHMID-M	
APPD.	SCALE	TOLERANCE	PART NAME
DWG. HELGA	UNIT	$XX \pm 0.25$ $XX \pm 0.25$ ANL	Pluggable Terminal Block PCB Straight Pitch 2,50mm Green XX: No. Poles
DATE 2013/10	M M	SIZE. A 4	PART NO.
PAGE 1 OF 1	REV. C		SM C09 0253 XX SOC