

SPECIFICATIONS

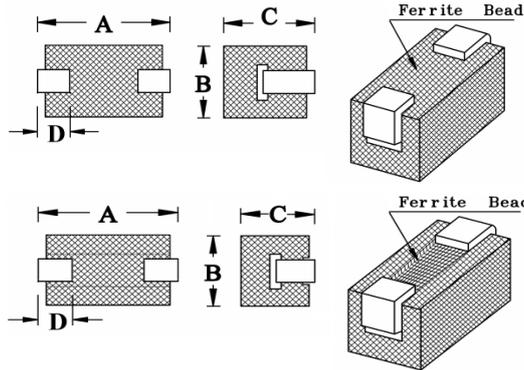


Figure 1

Figure 2

No	Part No.	Impedance (Ω)		DC Resistance (mΩ)	Rated Current (A) ΔT=40°C	Dimensions (mm)				Type
		25MHz	100MHz			A	B	C	D	
1	SSMB 323023I	20 ± 25%	32 ± 25%	0.6 ⁺⁰	12 Max.	3.08 ^{+0.1} _{-0.15}	2.90 ± 0.10	2.5 Max	0.80 ^{+0.20} _{-0.30}	2
2	SSMB 403022I	26 Min.	40 Min.	0.6 ⁺⁰	12 Max.	5.0 Max.	3.0 ± 0.20	2.5 Max.	1.30 ± 0.25	2
3	★ SSMB 403025	30 Min.	47 ± 20%	0.6 ⁺⁰	12 Max.	5.0 Max.	3.1 ± 0.10	3.1Max.	1.35 ± 0.15	1
4	SSMB 784730	65 ± 25%	98 typ	1.0 ⁺⁰	12 Max.	8.8 Max.	4.75 ± 0.20	3.6 Max.	1.45 ± 0.30	1
5	★ SSMB 853025	60 Min.	90 ± 20%	1.0 ⁺⁰	12 Max.	9.5 Max.	3.1 ± 0.10	3.1 Max.	1.70 ± 0.40	1

★ popular item

FEATURES

- Suitable for applications with higher current.
- High mechanical body.
- Stable characteristic.

CHARACTERISTIC CURVE

