

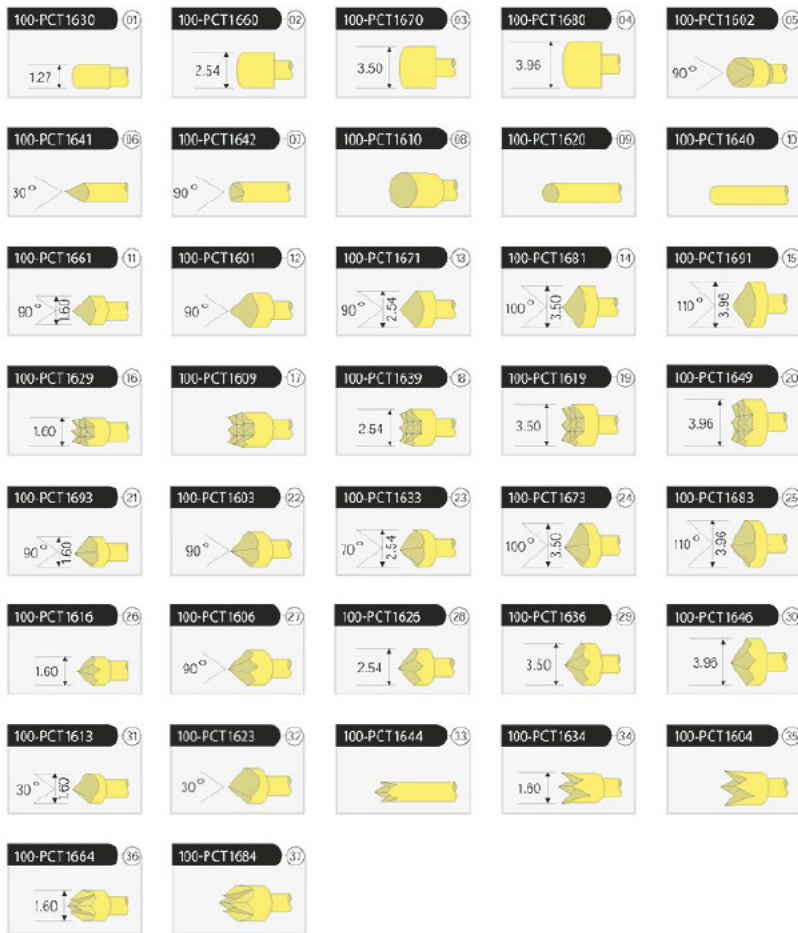



Probe



Receptacle



100-SCT16WW



100-SCT16VW



100-SCT16CR

Also available in flange.

Specifications	
Recommended Minimum Centre	2.54mm (100mil)
Current Rating	3A, continuous
Contact Resistance	50 milliOhms

Materials	
Plunger	Full-Hard Beryllium Copper or SK Material, Rhodium Plated over Nickel (or Gold Plated over Nickel)
Contact Barrel	Brass, Gold Plated
Spring	Music Wire, Gold Plated
Receptacle	Brass, Gold Plated

Spring Contact Probe Options			
Size	Rated Spring Force	Rated Stroke	Drill Size
~	4.0oz (113g) 9.0oz (225g)	2.54mm	∅ 1.75mm
*	7.0oz (198g)	2.54mm	∅ 1.75mm

SCHMID-M

			DRAW	CHECK			
A		25-1-2022	Walter	Spick			
					mm	.X± 0.25	P/N: SCP 100Mil 2,54mm-100-PCT16
					1 : 1	.XX± 0.13	NO: REV: