


3W isolated DC-DC converter  
Wide input and regulated dual output

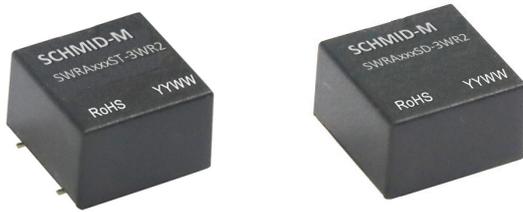

CE Patent Protection RoHS

## FEATURES

- Ultra compact DIP/SMD package
- Wide 2:1 input voltage range
- High efficiency up to 82%
- Operating ambient temperature range: -40°C to +85°C
- I/O isolation test voltage: 1.5K VDC
- Continuous short-circuit protection
- Industry standard pin-out
- EN62368 approved

SWRA\_ST/SD-3WR2 series of isolated 3W DC-DC converter products with a 2:1 input voltage range. The product has a ultra-compact DIP/SMD package with efficiencies of up to 82%, operating temperature of -40°C to +85°C and continuous short circuit protection. The ultra-small dimension design makes the converters an ideal solution for communications, instrumentation and industrial electronics applications.

## Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Ripple & Noise <sup>②</sup> (mVp-p) Typ./Max.	Full Load Efficiency (%) Min./Typ.	Max. Capacitive Load <sup>③</sup> (μF)
		Nominal (Range)	Max. <sup>①</sup>	Voltage(VDC)	Current (mA) Max./Min.			
CE	SWRA1205ST/SD-3WR2	12 (9-18)	20	±5	±300/±15	50/100	76/78	1000
	SWRA1209ST/SD-3WR2			±9	±167/±9		76/78	680
	SWRA1212ST/SD-3WR2			±12	±125/±7		77/79	470
	SWRA1215ST/SD-3WR2			±15	±100/±5		77/79	330
	SWRA2405ST/SD-3WR2	24 (18-36)	40	±5	±300/±15		76/78	1000
	SWRA2409ST/SD-3WR2			±9	±167/±9		78/80	680
	SWRA2412ST/SD-3WR2			±12	±125/±7		80/82	470
	SWRA2415ST/SD-3WR2			±15	±100/±5		79/81	330

Notes: ①Exceeding the maximum input voltage may cause permanent damage;

②Ripple & noise testing condition at nominal input voltage and 5%-100% load, the "tip and barrel" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

③The specified maximum capacitive load for positive and negative output is identical.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load/no-load)	12VDC input voltage	--	321/30	329/50	mA
	24VDC input voltage	--	156/20	165/40	
Reflected Ripple Current	12VDC input voltage	--	40	--	
	24VDC input voltage	--	55	--	
Surge Voltage (1sec. max.)	12VDC input voltage	-0.7	--	25	VDC
	24VDC input voltage	-0.7	--	50	
Start-up Voltage	12VDC input voltage	--	--	9	
	24VDC input voltage	--	--	18	
Input Filter		Capacitance filter			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy	5%-100% load, input voltage range	Vo1	±1	±3	%
		Vo2	±3	±5	
No-load Output Voltage Accuracy	Input voltage range	Vo1	±2	±5	
		Vo2	±5	±8	
Linear Regulation	Input voltage variation from low to high at full load	Vo1	±0.2	±0.5	
		Vo2	±0.5	±1	

# DC/DC Converter

## SWRA\_ST/SD-3WR2 Series

Load Regulation	5%-100% load	Vo1	--	±0.5	±1	%
		Vo2	--	--	±3	
Transient Recovery Time	25% load step change		--	1	3	ms
Transient Response Deviation			--	±3	±5	%
Temperature Coefficient	Full load		--	--	±0.03	%/°C
Short-circuit Protection			Continuous, self-recovery			

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output insulation at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V	--	100	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	
Reflow Soldering Temperature		Peak temperature ≤245°C, duration ≤60s max. over 217°C. see also IPC/JEDEC J-STD-020D.1.			
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency (PFM Mode)	Full load, nominal input voltage	--	300	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours


### Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94-V0)	
Dimension	SWRA_SD-3WR2	14.00 x 14.00 x 9.00 mm
	SWRA_ST-3WR2	15.00 x 14.00 x 9.10 mm
Weight	2.2g(Typ.)	
Cooling Method	Free air convection	

### Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B (see Fig. 4-② for recommended circuit)	
	RE	CISPR32/EN55032 CLASS B (see Fig. 4-② for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (see Fig. 4-① for recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2KV (see Fig. 4-① for recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s perf. Criteria A

### Typical Characteristic Curves

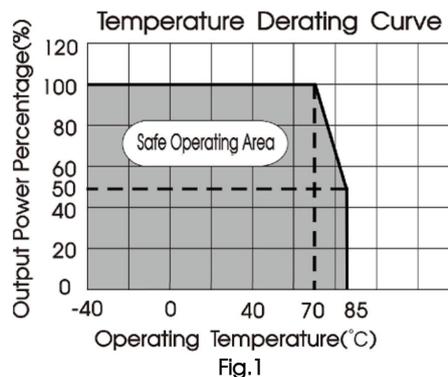

# DC/DC Converter

## SWRA\_ST/SD-3WR2 Series


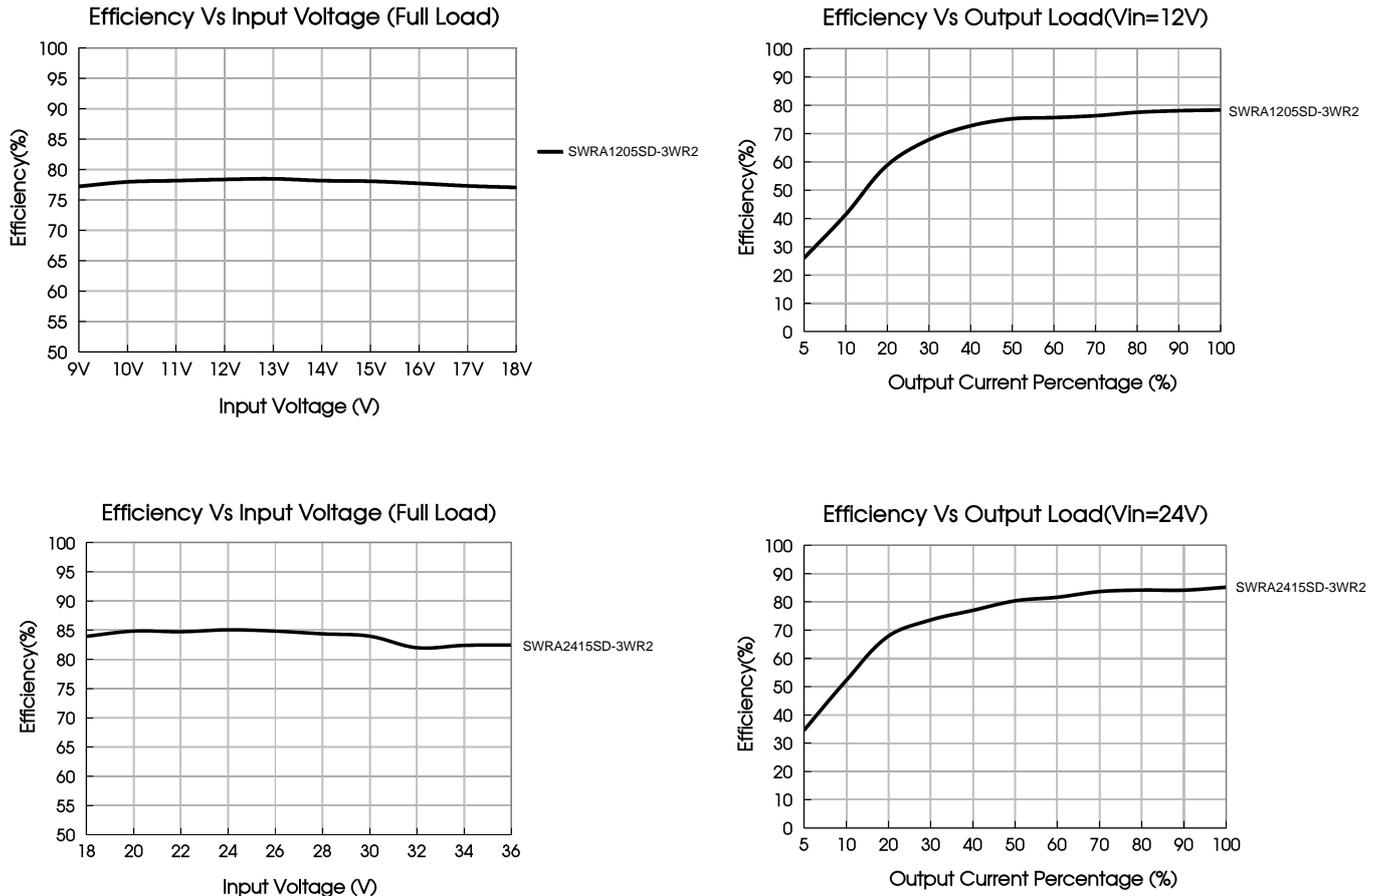


Fig.2

## Design Reference


### 1. Recommended circuit

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 3. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$ , connecting a "Y" capacitor between input "GND" and output "0V", and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the max. capacitive load value of the product.

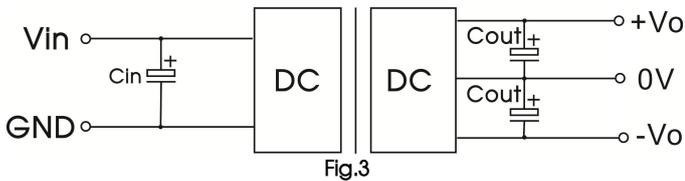

Vin(VDC)	12V	24V
Cin	47 $\mu$ F/50V	
Vo(VDC)	5V、9V	12V、15V
Cout	47 $\mu$ F/16V	10 $\mu$ F/25V

### 2. EMC compliance circuit

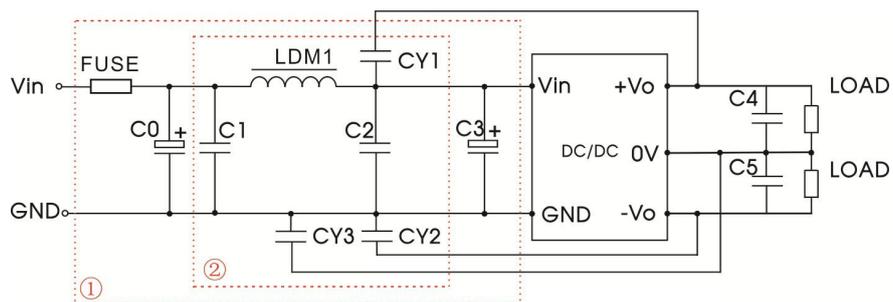

# DC/DC Converter

## SWRA\_ST/SD-3WR2 Series

Parameter description:

Input Voltage	Vin:12VDC		Vin:24VDC
Output Voltage	±5V、±9V、±12V	±15V	±5V、±9V、±12V、±15V
FUSE	slow blow, choose according to actual input current		
C0	1000μF/25V		680μF/50V
C1	4.7μF/50V		
LDM1	10μH		
C2	10μF/50V		
C3	330μF/50V		
CY1	1nF/2000V	470pF/2000V	1nF/2000V
CY2	1nF/2000V	470pF/2000V	1nF/2000V
CY3	1nF/2000V	470pF/2000V	/
C4、C5	Refer to the Cout Fig.3		

Notes: For EMC tests we use Part ① in Fig. 4 for immunity and part ② for emissions test. Selecting based on needs.

### 3. Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module(see Fig. 5).

Generally: Vin=12V series Iave =600mA  
 Vin=24V series Iave =300mA

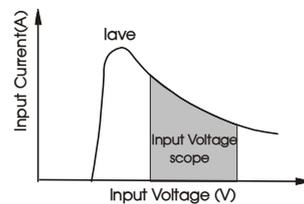


Fig. 5

### 4. Output load requirements

When using, the minimum load of the module output should not be less than 5% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 5% dummy load in parallel at the output end, the dummy load is generally a resistor, please note that the resistor needs to be used in derating.



# DC/DC Converter

## SWRA\_ST/SD-3WR2 Series

### Dimensions and Recommended Layout

SWRA\_SD-3WR2 series

THIRD ANGLE PROJECTION 

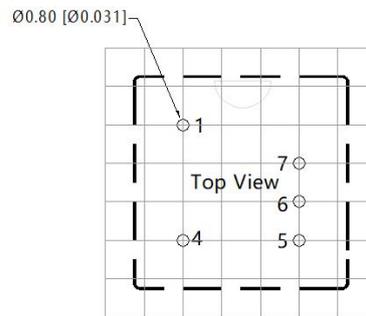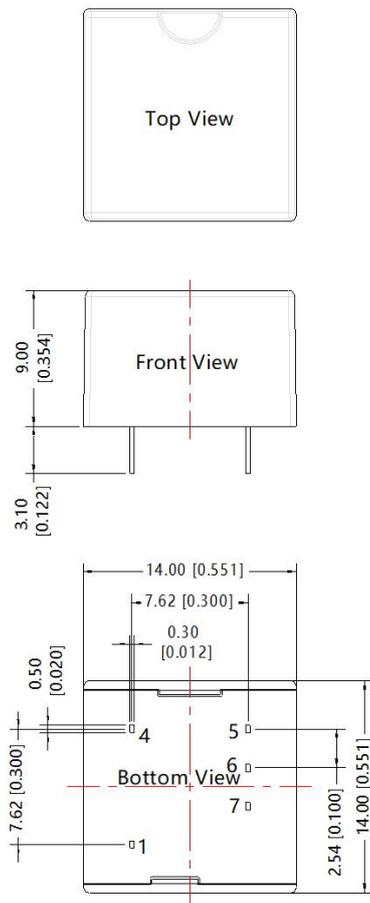

Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Function
1	GND
4	Vin
5	+Vo
6	0V
7	-Vo



Note:  
 Unit: mm[inch]  
 Pin diameter tolerances:  $\pm 0.10$  [ $\pm 0.004$ ]  
 General tolerances:  $\pm 0.50$  [ $\pm 0.020$ ]

# DC/DC Converter

## SWRA\_ST/SD-3WR2 Series

SWRA\_ST-3WR2 series

THIRD ANGLE PROJECTION 

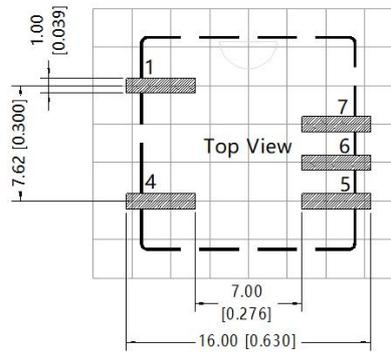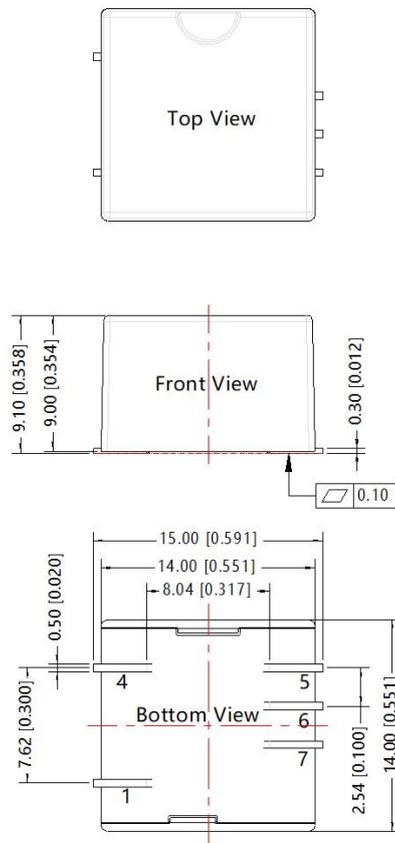

Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Function
1	GND
4	Vin
5	+Vo
6	0V
7	-Vo

Note:

Unit: mm[inch]

Pin diameter tolerances:  $\pm 0.10$  [ $\pm 0.004$ ]

General tolerances:  $\pm 0.50$  [ $\pm 0.020$ ]

### Notes:

1. Recommend to use module with more than 5% load, if not, the ripple of the product may exceeds the specification, but does not affect the reliability of the product;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.