


6W Isolated DC-DC converter in SMD
Ultra-wide input and regulated single output



CE Patent Protection RoHS

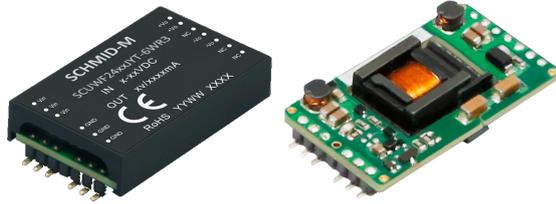

FEATURES

- Ultra-wide 7:1 input voltage range
- High efficiency up to 82%
- I/O isolation test voltage 3K VAC
- Input under-voltage protection, output short-circuit, over-current, over-voltage protection
- Creepage distance is 4.5mm, clearance is 4.2mm
- Operating ambient temperature range: -40°C to +105°C
- EMI meets automotive standards EN55025/CISPR 25 standard Class 4
- AEC-Q100 standards approved
- Production process meets IATF16949 system
- EN62368 approved

SCUWF24_J(Y)T-6WR3 series of isolated 6W DC-DC converter products with an ultra-wide 7:1 input voltage range. They feature efficiencies up to 80%, input to output isolation is tested with 3000 VAC and the converter safely operate ambient temperature of -40°C to +105°C, input under-voltage protection, output over-voltage, over-current, short-circuit protection. They are widely used in applications such as automobile electronic, industrial control, electric power, instruments and communication fields.

Selection Guide

Certification	Part No. ^①	Input Voltage (VDC)		Output			Full Load Efficiency (%) Min./Typ.	Capacitive Load (μF)Max.
		Nominal (Range)	Max. ^②	Voltage (VDC)	Current(mA) Max./Min.			
					6≤Vin<9	9≤Vin≤42		
CE	SCUWF2405J(Y)T-6WR3	24 (6-42)	45	5	960/0	1200/0	76/78	1000
	SCUWF2412J(Y)T-6WR3			12	400/0	500/0	78/80	470
	SCUWF2415J(Y)T-6WR3			15	320/0	400/0	78/80	220
	SCUWF2424J(Y)T-6WR3			24	200/0	250/0	80/82	100

Notes:
 ① SCUWF24_J(Y)T-6WR3 contains 2 types of products, include SCUWF24_JT-6WR3 (SMD package without shell) and SCUWF24_JY-6WR3 (SMD package with shell);
 ② Exceeding the maximum input voltage may cause permanent damage.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	Nominal input voltage	--	321/8	329/15	mA
Reflected Ripple Current					
Surge Voltage (1sec. max.)		-0.7	--	50	VDC
Start-up Voltage		--	--	6	
Input Under-voltage Protection		3.5	4.5	--	
Start-up Time	Nominal input voltage & constant resistance load	--	10	150	ms
Input Filter		Pi filter			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy ^①	5%-100% load	--	±1	±2	%	
Linear Regulation	Input voltage variation from low to high at full load	--	±0.2	±0.5		
Load Regulation	5%-100% load	--	±0.5	±1		
Transient Recovery Time	25% load step change, nominal input voltage	--	300	500	μs	
Transient Response Deviation	25% load step change, input voltage range	5V output	--	±4	±8	%
		Others	--	±3	±5	
Temperature Coefficient	Full load	--	--	±0.03	%/°C	
Ripple & Noise ^②	20MHz bandwidth, nominal input voltage, 5%-100% load	--	60	100	mV p-p	

DC/DC Converter

SCUWF24_J(Y)T-6WR3 Series

Over-voltage Protection	Input voltage range	110	--	160	%Vo
Over-current Protection		110	--	300	%Io
Short-circuit Protection		Continuous, self-recovery			
Note:					
① Output voltage accuracy of 5VDC output converter for 0%-5% load is $\pm 3\%$ max, voltage accuracy of other models for 0%-5% load is $\pm 2\%$ max ;					
② Ripple & Noise at < 5% load is 250mV max. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.					

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 5mA max.	3000	--	--	VAC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	M Ω
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V	--	500	--	pF
Reinforced Isolation	Clearance	4.2	--	--	mm
	Creepage	4.5	--	--	
Operating Temperature	See Fig. 1	-40	--	+105	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Vibration		GBT 28046.3-2011 4.1.2.4 Random vibration, passenger car, sprung masses (vehicle body) 1. The r.m.s. acceleration value shall be 27.8 m/s ² . 2. Use a test duration of 8 hours for each plane of the DUT.			
Switching Frequency *	PWM mode	--	270	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 1			
Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.					


Mechanical Specifications

Case Material		Black epoxy resin; flame-retardant and heat-resistant
Dimensions	SCUWF24_JT-6WR3	43.68 x 23.00 x 10.00mm
	SCUWF24_JYT-6WR3	43.68 x 25.00 x 10.64 mm
Weight	SCUWF24_JT-6WR3	7.5g (Typ.)
	SCUWF24_JYT-6WR3	10.4g (Typ.)
Cooling Method		Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR25/EN55025 CLASS 4 (see Fig.3 for recommended circuit)	
		CISPR32/EN55032 CLASS A (without external components)	
	RE	CISPR25/EN55025 CLASS 4 (see Fig.3 for recommended circuit)	
		CISPR32/EN55032 CLASS A (without external components)	
Immunity	ESD	ISO10605 Contact ± 6 KV	perf. Criteria B
	RS	ISO11452-2 150V/m (see Fig.3 for recommended circuit)	perf. Criteria A
	BCI	ISO11452-4 1MHz-400MHz, 150mA (see Fig.3 for recommended circuit)	perf. Criteria A
	Electrical transient conduction along supply lines only	ISO7637-2 LEVEL III	
		Pulse1 (see Fig.3 for recommended circuit)	perf. Criteria B
		Pulse2a (see Fig.3 for recommended circuit)	perf. Criteria A
		Pulse2b (see Fig.3 for recommended circuit)	perf. Criteria B
		Pulse3a (see Fig.3 for recommended circuit)	perf. Criteria A
	Pulse3b (see Fig.3 for recommended circuit)	perf. Criteria A	

Typical Characteristic Curve

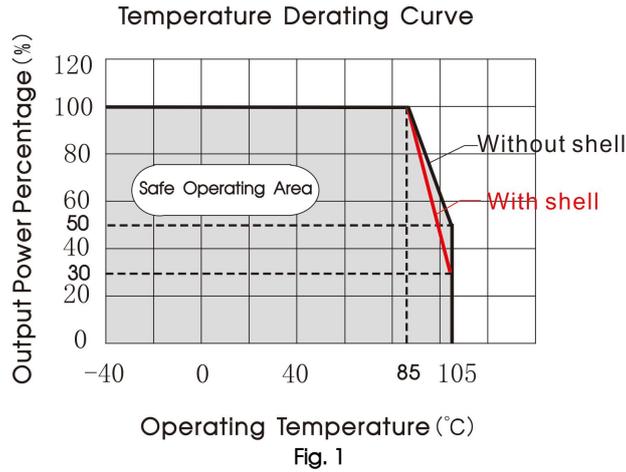


Design Reference

1. Typical application


All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

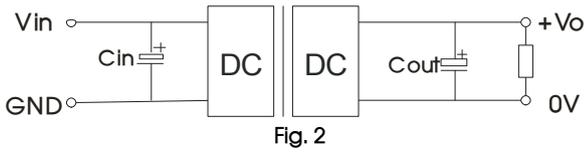

Vout (VDC)	Cin	Cout
5	100μF/63V	100μF/16V
12/15		100μF/35V
24		47μF/35V

2. EMC compliance circuit

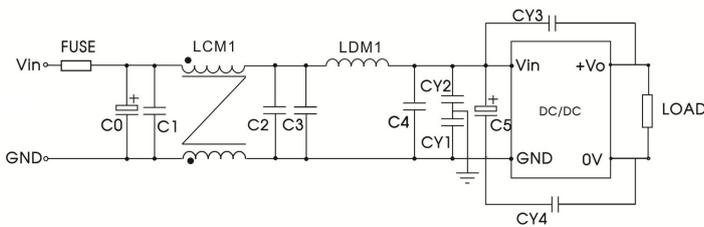

Parameter description:

Model	Vin:24VDC
FUSE	Choose according to actual input current
C0	680μF/63V
C1/C2/C3/C4	10μF/100V
LCM1	1mH(FL2D-10-102)
LDM1	4.7μH/3.1A
C5	82μF/100V
CY1/CY2	100pF/400VAC
CY3/CY4	2200pF/400VAC



3. The products do not support parallel connection of their output

DC/DC Converter

SCUWF24_J(Y)T-6WR3 Series

SCUWF24_JT-6WR3 Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

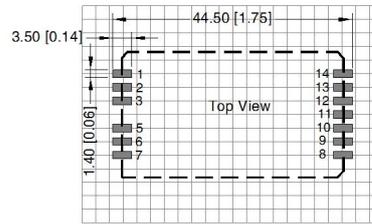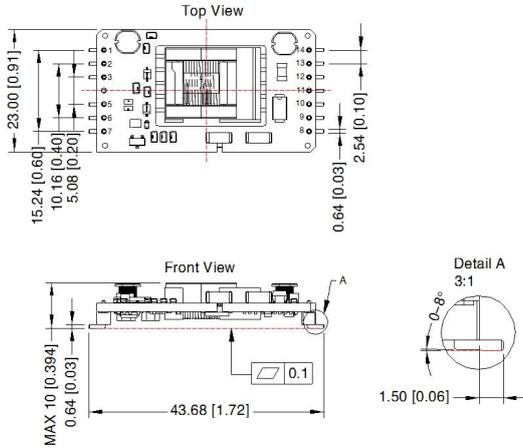

Note: Grid 2.54*2.54mm



Pin-Out			
Pin	Mark	Pin	Mark
1	Vin	9	NC
2	Vin	10	-Vo
3	Vin	11	-Vo
5	GND	12	NC
6	GND	13	+Vo
7	GND	14	+Vo
8	NC		

NC: Pin to be isolated circuitry

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

SCUW24_JYT-6WR3 Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

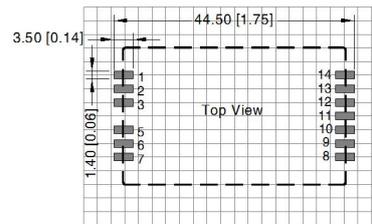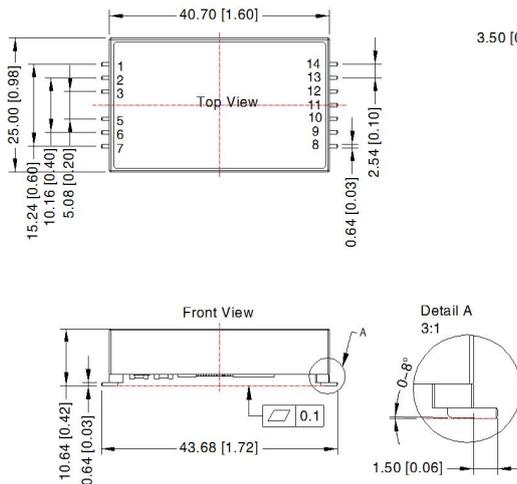

Note: Grid 2.54*2.54mm

Pin-Out			
Pin	Mark	Pin	Mark
1	Vin	9	NC
2	Vin	10	-Vo
3	Vin	11	-Vo
5	GND	12	NC
6	GND	13	+Vo
7	GND	14	+Vo
8	NC		

NC: Pin to be isolated circuitry

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

DC/DC Converter

SCUWF24_J(Y)T-6WR3 Series

Note:

1. The maximum capacitive load offered were tested at input voltage range and full load;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.