

SK-6W Series

6W 4:1 Regulated Single & Dual output



Features

- Wide 4:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 84%
- -40 ~ 85°C Operation Temperature Range
- Metal Case Standard, Optional Plastic Case
- EMI Complies With EN55022 Class A





The SK series is a family of cost effective 6.0W single & dual output DC-DC converters. These converters are consisted with Nickel-coated copper in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3, 5, 7.2, 9, 12, 15, 18, 24, ± 3.3 , ± 5 , ± 7.2 , ± 9 , ± 12 , ± 15 , ± 18 and ± 24 Vdc. High performance features include high efficiency operation up to 78% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at $T_a = 25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

| OUTPUT SPECIFICATIONS | | EMC SPECIFICATIONS | | |
|--|--|--|--|------------------|
| Voltage accuracy | $\pm 1\%$ | Radiated Emissions | EN55022 | CLASS A |
| Line regulation | $\pm 0.5\%$ | Conducted Emissions (4) | EN55022 | CLASS A |
| Load regulation | $\pm 0.5\%$ | ESD | IEC 61000-4-2 | Perf. Criteria A |
| | (Output 3.3V / $\pm 3.3V$ Model) $\pm 1.5\%$ | RS | IEC 61000-4-3 | Perf. Criteria A |
| Ripple & noise (20 MHz bandwidth)(1) | 60mV pk-pk | EFT | IEC 61000-4-4 | Perf. Criteria A |
| Short circuit protection | Indefinite(Automatic Recovery) | Surge(5) | IEC 61000-4-5 | Perf. Criteria A |
| Temperature coefficient | $\pm 0.02\%/^\circ\text{C}$ | CS | IEC 61000-4-6 | Perf. Criteria A |
| Capacitor load(2) | See table | PFMF | IEC 61000-4-8 | Perf. Criteria A |
| INPUT SPECIFICATIONS | | PHYSICAL SPECIFICATIONS | | |
| Voltage Range | See table | Case Material | Nickel-coated Copper | |
| Max. Input Current | See table | | Non-conductive Black Plastic(UL94V-0 rated) | |
| No-Load Input Current | See table | Base Material | Non-conductive Black Plastic(UL94V-0 rated) | |
| Input Filter | PI Type | Pin Material | $\varnothing 0.5\text{mm}$ Brass Solder-coated | |
| Input Reflected Ripple Current(3) | 35mA pk-pk | Potting Material | Epoxy (UL94V-0 rated) | |
| | | Weight | 17.0g(Metal Case)/13.5g(Plastic Case) | |
| | | Dimensions | 1.25"x0.8"x0.4" | |
| GENERAL SPECIFICATIONS | | ENVIRONMENT SPECIFICATIONS | | |
| Efficiency | See table, typ. | Operating Temperature | $-40^\circ\text{C} \sim 85^\circ\text{C}$ (See Derating Curve) | |
| I/O Isolation Voltage(3 sec) | | Maximum Case Temperature | 100°C | |
| Input/Output | 1500~3500Vdc | Storage Temperature | $-40^\circ\text{C} \sim 125^\circ\text{C}$ | |
| Metal Case/Input & Output | 1000Vdc | Cooling | Nature Convection | |
| I/O Isolation Capacitance | 500 pF typ. | | | |
| I/O Isolation Resistance | 1000M Ohm | | | |
| Switching Frequency | Typical 266kHz | | | |
| Humidity | 95% rel H | | | |
| Reliability Calculated MTBF(MIL-HDBK-217F) | >1.121 Mhrs | | | |
| Safety Standard (designed to meet) | IEC 60950-1 | | | |
| | | ABSOLUTE MAXIMUM RATINGS(6) | | |
| | | These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. | | |
| | | Input Voltage(100mS) | | |
| | | 24 Models | $-0.7 \sim 40$ Vdc | |
| | | 48 Models | $-0.7 \sim 80$ Vdc | |
| | | Soldering Temperature | 260°C, max. | |
| | | (1.5mm from case 10sec. max.) | | |

PART NUMBER STRUCTURE

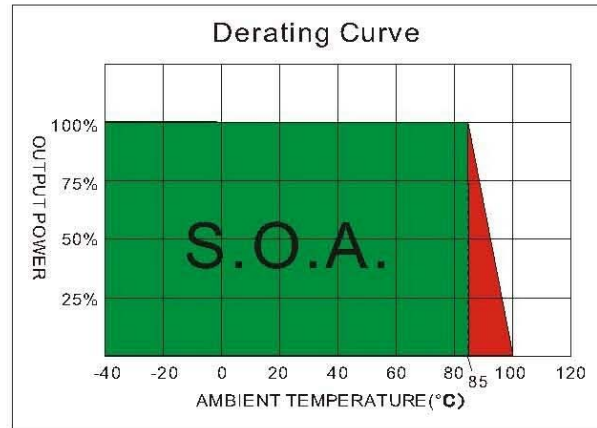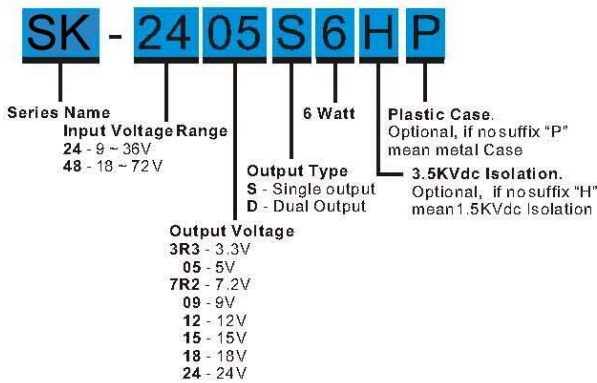

MODEL SELECTION GUIDE

| MODEL NUMBER | INPUT Voltage Range (V/dc) | INPUT Current | | OUTPUT Voltage (V/dc) | OUTPUT Current | | EFFICIENCY @FL (%) | Capacitor Load (µF) |
|--------------|----------------------------|---------------|----------------|-----------------------|----------------|----------------|--------------------|---------------------|
| | | No-Load (mA) | Full Load (mA) | | Min. load (mA) | Full load (mA) | | |
| SK-243R3S6 | 9-36 | 20 | 253.3 | 3.3 | 0 | 1400 | 76 | 1000 |
| SK-2405S6 | 9-36 | 20 | 312.5 | 5 | 0 | 1200 | 80 | 1000 |
| SK-247R2S6 | 9-36 | 20 | 304.9 | 7.2 | 0 | 833 | 82 | 330 |
| SK-2409S6 | 9-36 | 20 | 301.2 | 9 | 0 | 666 | 83 | 220 |
| SK-2412S6 | 9-36 | 20 | 301.2 | 12 | 0 | 500 | 83 | 220 |
| SK-2415S6 | 9-36 | 20 | 301.2 | 15 | 0 | 400 | 83 | 220 |
| SK-2418S6 | 9-36 | 20 | 304.9 | 18 | 0 | 333 | 82 | 47 |
| SK-2424S6 | 9-36 | 20 | 304.9 | 24 | 0 | 250 | 82 | 47 |
| SK-24 3R3D6 | 9-36 | 15 | 337.8 | ±3.3 | 0 | ±909 | 74 | ±470 |
| SK-24 05D6 | 9-36 | 15 | 312.5 | ±5 | 0 | ±600 | 80 | ±470 |
| SK-24 7R2D6 | 9-36 | 15 | 304.9 | ±7.2 | 0 | ±416 | 82 | ±470 |
| SK-24 09D6 | 9-36 | 15 | 308.64 | ±9 | 0 | ±333 | 81 | ±470 |
| SK-24 12D6 | 9-36 | 15 | 301.2 | ±12 | 0 | ±250 | 83 | ±330 |
| SK-24 15D6 | 9-36 | 15 | 304.9 | ±15 | 0 | ±200 | 82 | ±100 |
| SK-24 18D6 | 9-36 | 15 | 304.9 | ±18 | 0 | ±166 | 82 | ±10 |
| SK-24 24D6 | 9-36 | 15 | 308.64 | ±24 | 0 | ±125 | 81 | ±10 |
| SK-483R3S6 | 18-72 | 15 | 126.4 | 3.3 | 0 | 1400 | 76 | 1000 |
| SK-4805S6 | 18-72 | 15 | 156.25 | 5 | 0 | 1200 | 80 | 1000 |
| SK-487R2S6 | 18-72 | 15 | 156.25 | 7.2 | 0 | 833 | 80 | 470 |
| SK-4809S6 | 18-72 | 15 | 152.43 | 9 | 0 | 666 | 82 | 470 |
| SK-4812S6 | 18-72 | 15 | 150.6 | 12 | 0 | 500 | 83 | 470 |
| SK-4815S6 | 18-72 | 15 | 148.8 | 15 | 0 | 400 | 84 | 100 |
| SK-4818S6 | 18-72 | 15 | 150.6 | 18 | 0 | 333 | 83 | 10 |
| SK-4824S6 | 18-72 | 15 | 150.6 | 24 | 0 | 250 | 83 | 10 |
| SK-48 3R3D6 | 18-72 | 15 | 162.3 | ±3.3 | 0 | ±909 | 77 | ±330 |
| SK-48 05D6 | 18-72 | 15 | 158.22 | ±5 | 0 | ±600 | 79 | ±330 |
| SK-48 7R2D6 | 18-72 | 15 | 156.25 | ±7.2 | 0 | ±416 | 80 | ±220 |
| SK-48 09D6 | 18-72 | 15 | 152.4 | ±9 | 0 | ±333 | 82 | ±220 |
| SK-48 12D6 | 18-72 | 15 | 152.4 | ±12 | 0 | ±250 | 82 | ±220 |
| SK-48 15D6 | 18-72 | 15 | 148.8 | ±15 | 0 | ±200 | 84 | ±47 |
| SK-48 18D6 | 18-72 | 15 | 156.25 | ±18 | 0 | ±166 | 80 | ±22 |
| SK-48 24D6 | 18-72 | 15 | 154.3 | ±24 | 0 | ±125 | 81 | ±22 |

Suffix "H" means 3.5KVdc isolation
 Suffix "P" means Plastic case instead of standard Metal Case

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : info@schmid-m.com

Specifications subject to change without notice.


NOTE

1. Ripple/Noise measured with a 1uF ceramic capacitor.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. It's recommended to add C1(68 F), C2(33 F), L(12 H) in input end to achieve EN55022 conducted Class A.
5. An external filter capacitor is required if the module has to meet IEC61000-4-5.
The filter capacitor SCHMID-M suggest: Nippon - chemi - con KY series, 220uF/100V.
6. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.

TEST CONFIGURATIONS


Output Ripple & Noise Measurement Test

Use a capacitor Cout(1.0uF) measurement.
The Scope measurement bandwidth is 0-20MHz.

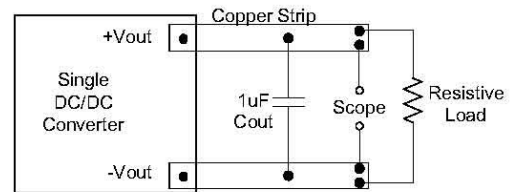


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor Lin(12uH) and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

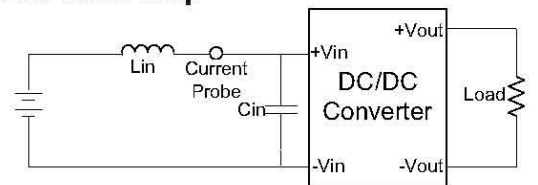


EMI Filter

Input filter components (C1,C2, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

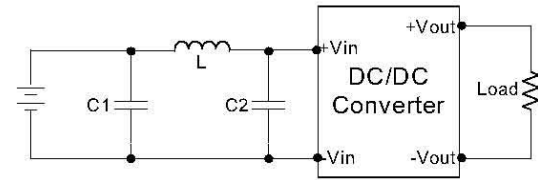


| C1 | L | C2 |
|------------|------|------------|
| 68uF, 100V | 12uH | 33uF, 100V |

ELECTRICAL CHARACTERISTIC CURVES

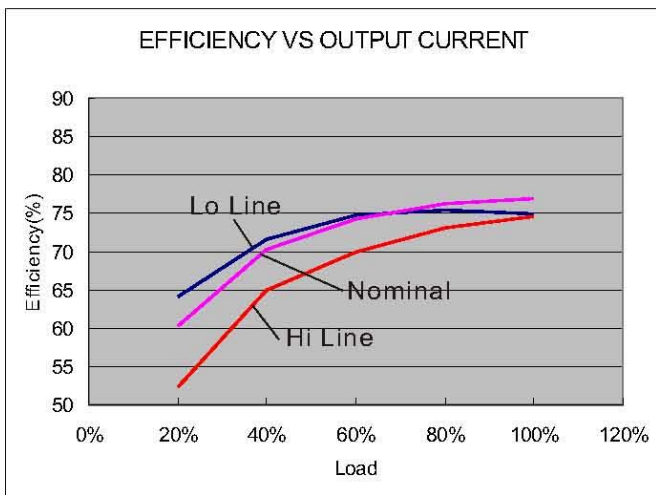

24 Models

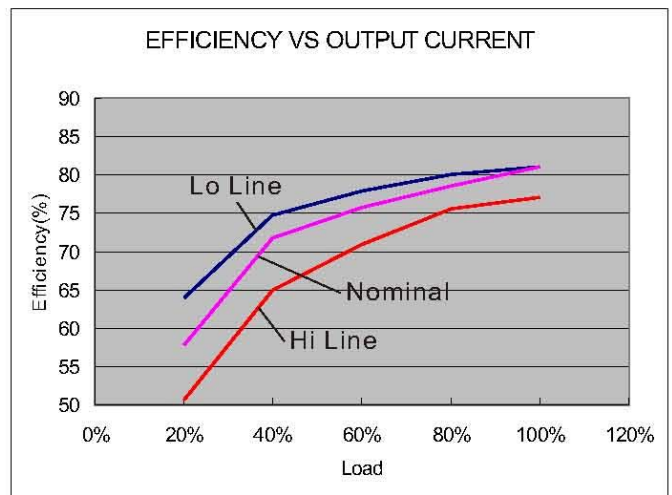


48 Models

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : info@schmid-m.com


Specifications subject to change without notice.

MECHANICAL SPECIFICATIONS

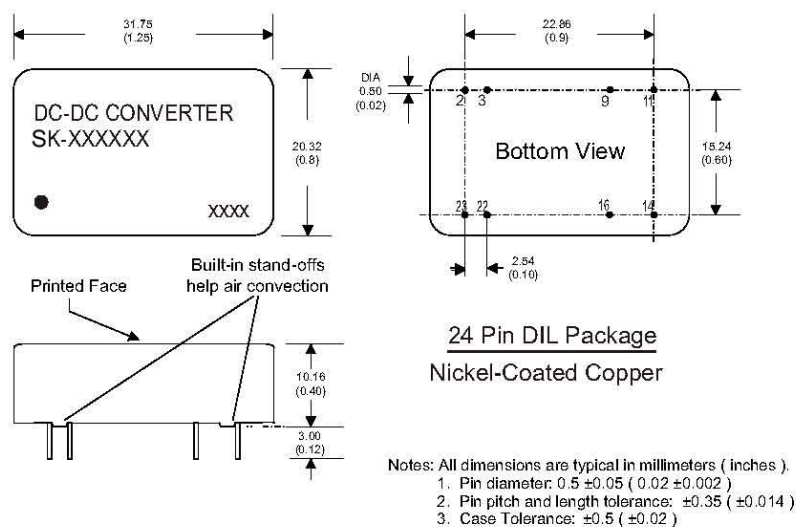

| PIN CONNECTIONS | | |
|-----------------|-----------|-----------|
| PIN NUMBER | SINGLE | DUAL |
| 2 | -V Input | -V Input |
| 3 | -V Input | -V Input |
| 9 | N.P. | Common |
| 11 | N.C. | -V Output |
| 14 | +V Output | +V Output |
| 16 | -V Output | Common |
| 22 | +V Input | +V Input |
| 23 | +V Input | +V Input |

(The Pin Connection of high isolation one is the same with normal one.)

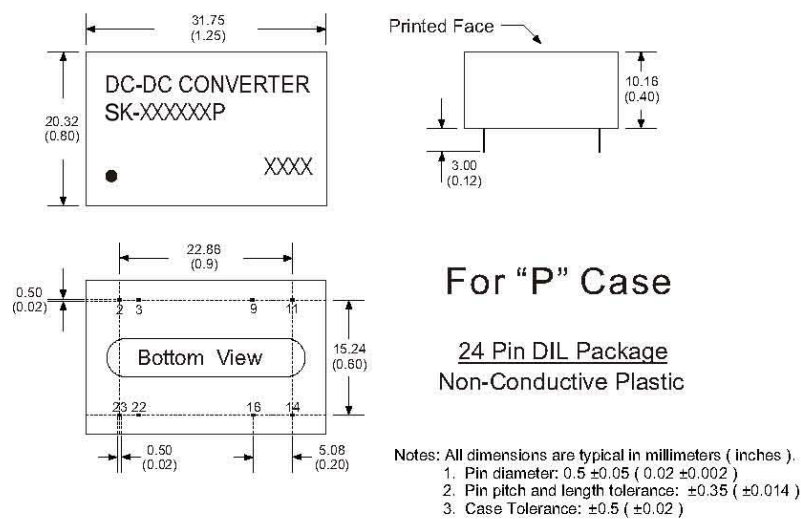

| PIN CONNECTIONS | | |
|-----------------|-----------|-----------|
| PIN NUMBER | SINGLE | DUAL |
| 2 | -V Input | -V Input |
| 3 | -V Input | -V Input |
| 9 | N.P. | Common |
| 11 | N.C. | -V Output |
| 14 | +V Output | +V Output |
| 16 | -V Output | Common |
| 22 | +V Input | +V Input |
| 23 | +V Input | +V Input |

(The Pin Connection of high isolation one is the same with normal one.)