

S7W - 15W Series


SCHMID-M



15W 4:1 Regulated Single & Dual output

Features

- Wide 4:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 86%
- -40 ~ 85°C Operation Temperature Range
- Remote on/off Control (Optional)
- EMI Complies With EN55022 Class A
- Optional Heat-sink

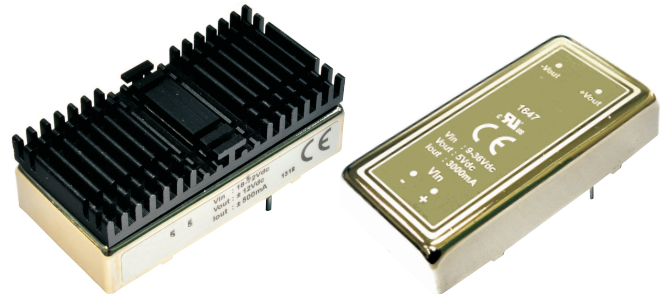

The S7W series is a family of cost effective 15W single & dual output DC-DC converters. These converters are made with nickle-coated brass case in a 2"x1" with high performance features such as 1500 VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated by using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3, 5, 7, 2, 9, 12, 15, ± 5 , ± 7.2 , ± 9 , ± 12 , ± 15 Vdc. High performance features include high efficiency operation up to 86% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$, max.
Line regulation	$\pm 0.5\%$, max.
Load regulation	$\pm 0.5\%$ (10% to 100% Loading), max. $\pm 1\%$ (below 10% load), max.
Cross Regulation (Dual Output) (1)	$\pm 5\%$
Ripple & noise (20 MHz bandwidth)(2)	75mV pk-pk, max.
Over-current protection	140% of FL, typ.
Short circuit protection	Indefinite (Automatic Recovery)
Temperature coefficient	$\pm 0.02\%$ /°C
Capacitor load(3)	See table, max.

INPUT SPECIFICATIONS	
Input Voltage Range	See table
Under Voltage Lockout	
24V Models Module ON / OFF	8.6Vdc / 8Vdc, typ.
48V Models Module ON / OFF	16Vdc / 14Vdc, typ.
Start up Time	20mS, typ.
(Nominal Vin and constant resistive load)	
Input Filter	Pi Type
Input Current (No-Load)	See table, max.
Input Current (Full-Load)	See table, typ.
Input Reflected Ripple Current(4)	35mA _{p-p} , typ.
CTRL(5) Module ON	2.5 to 5.5 Vdc or Open
Module OFF	-0.7 to 0.8Vdc or Short circuit pin 2 and pin 6
CTRL OFF Input Current	2.5mA, typ.

GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
I/O Isolation Voltage(60sec)	
Input/Output	1500Vdc
Case/Input & Output	1000Vdc
Isolation Resistance	1000 M Ω , min.
Isolation Capacitance	1200 pF, typ.
Switching frequency	300kHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217 F)	>1.121 Mhrs
Safety Standard	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1
Safety Approvals	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1



EMC SPECIFICATIONS		
Radiated Emissions	EN55022	CLASS A
Conducted Emissions (6)	EN55022	CLASS A
ESD	IEC 61000-4-2	Perf. Criteria B
RS	IEC 61000-4-3	Perf. Criteria A
EFT	IEC 61000-4-4	Perf. Criteria A
Surge(7)	IEC 61000-4-5	Perf. Criteria A
CS	IEC 61000-4-6	Perf. Criteria A
PFMF	IEC 61000-4-8	Perf. Criteria A

PHYSICAL SPECIFICATIONS	
Case Material	Nickel-coated Brass
Pin Material	$\Phi 1.0$ mm Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	31.0g
Dimensions	2.00"x1.00"x0.40"

ENVIRONMENTAL SPECIFICATIONS	
Operating Ambient Temperature	-40°C ~ +85°C (See Derating Curve) -40°C ~ +70°C (For 100% load)
Maximum Case Temperature	100°C
Thermal Impedance (Nature Convection)	Without Heat-sink 12°C/W With Heat-sink 10°C/W
Storage Temperature	-40°C ~ +125°C.
Cooling	Nature Convection

ABSOLUTE MAXIMUM RATINGS(8)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
24 Models	50 Vdc, max.
48 Models	100 Vdc, max.
Soldering Temperature	260°C, max.
(1.5mm from case 10sec max.)	

S7W - 15W 4:1 Regulated Single & Dual output

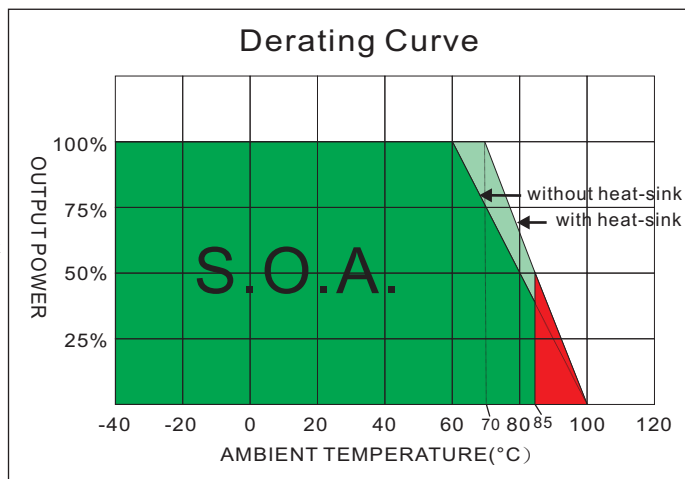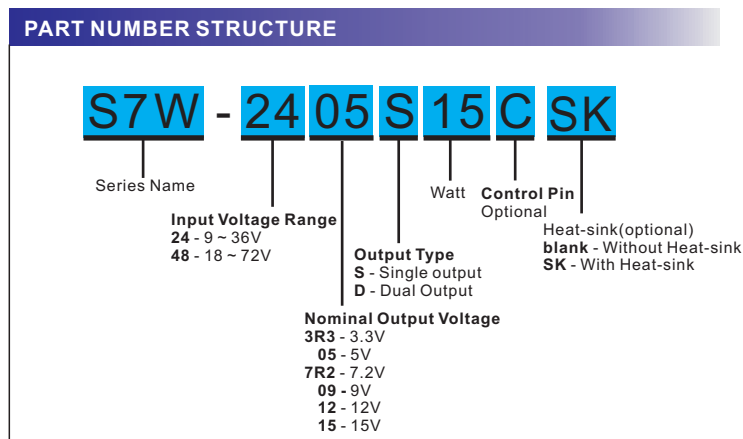

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @FL (µF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
S7W-243R3S 15	9-36	25	515	3.3	0	3000	80	3300
S7W-2405S 15	9-36	25	753	5	0	3000	83	3300
S7W-247R2S 15	9-36	25	744	7.2	0	2083	84	1000
S7W-2409S 15	9-36	25	744	9	0	1666	84	680
S7W-24 12S 15	9-36	25	735	12	0	1250	85	680
S7W-24 15S 15	9-36	25	726	15	0	1000	86	470
S7W-2405D 15	9-36	25	753	±5	0	±1500	83	±2200
S7W-247R2D 15	9-36	25	744	±7.2	0	±1041	84	±470
S7W-2409D 15	9-36	25	744	±9	0	±833	84	±470
S7W-24 12D 15	9-36	25	735	±12	0	±625	85	±470
S7W-24 15D 15	9-36	25	726	±15	0	±500	86	±330
S7W-483R3S 15	18-72	20	257	3.3	0	3000	80	3300
S7W-4805S 15	18-72	20	376	5	0	3000	83	3300
S7W-487R2S 15	18-72	20	372	7.2	0	2083	84	1000
S7W-4809S 15	18-72	20	372	9	0	1666	84	1000
S7W-48 12S 15	18-72	20	367	12	0	1250	85	680
S7W-48 15S 15	18-72	20	363	15	0	1000	86	470
S7W-4805D 15	18-72	20	376	±5	0	±1500	83	±2200
S7W-487R2D 15	18-72	20	372	±7.2	0	±1041	84	±470
S7W-4809D 15	18-72	20	372	±9	0	±833	84	±470
S7W-48 12D 15	18-72	20	367	±12	0	±625	85	±470
S7W-48 15D 15	18-72	20	363	±15	0	±500	86	±330


NOTE

1. One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
2. Measured with 20MHz bandwidth and 1.0uF ceramic capacitor.
3. Tested by minimal Vin and constant resistive load.
4. Measured Input reflected ripple current with a simulated source inductance of 12uH.
5. Input filter components (C1, L, C2) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.
6. An external filter capacitor is required if the module has to meet IEC61000-4-5.
The filter capacitor SCHMID-M suggest: Nippon chemi-con KY series, 220uF/100V.
7. Exceeding the absolute ratings of the unit could cause damage.
It is not allowed for continuous operating.

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12 μ H) and a source capacitor C_{in} (47 μ F, ESR<1.0 Ω at 100KHz) at nominal input and full load.

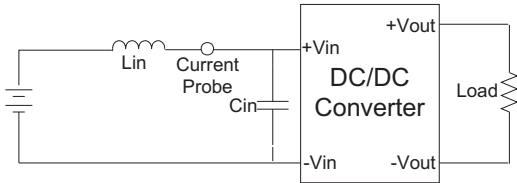

EMI Filter


Input filter components (C_1, L, C_2) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

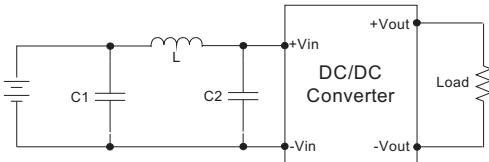


	C1	L	C2
S7W-24XXXXXX	330 μ F/100V	12 μ H	100 μ F/100V
S7W-48XXXXXX	330 μ F/100V	12 μ H	100 μ F/100V

Output Ripple & Noise Measurement Test


Use a capacitor C_{out} (1.0 μ F) measurement. The Scope measurement bandwidth is 0-20MHz.

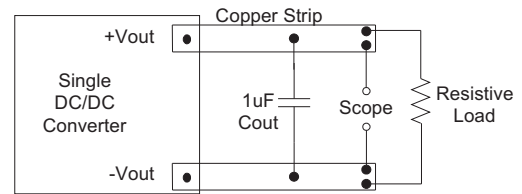

ELECTRICAL CHARACTERISTIC CURVES

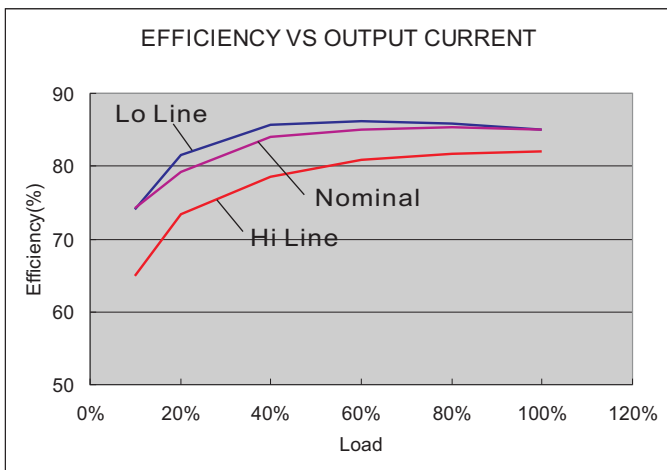


24 Models

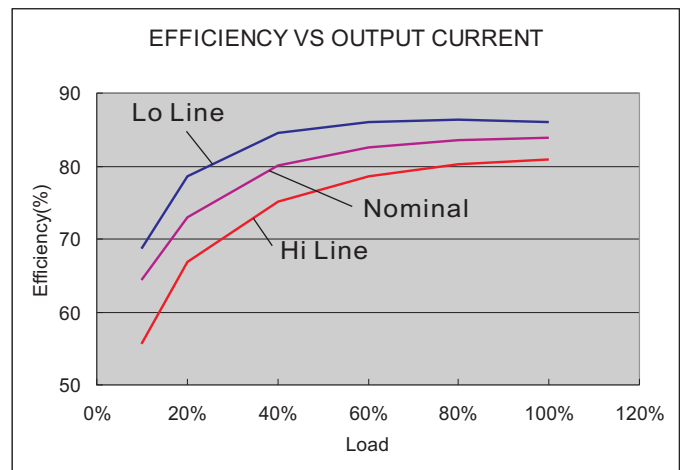

48 Models

S7W - 15W 4:1 Regulated Single & Dual output

MECHANICAL SPECIFICATIONS

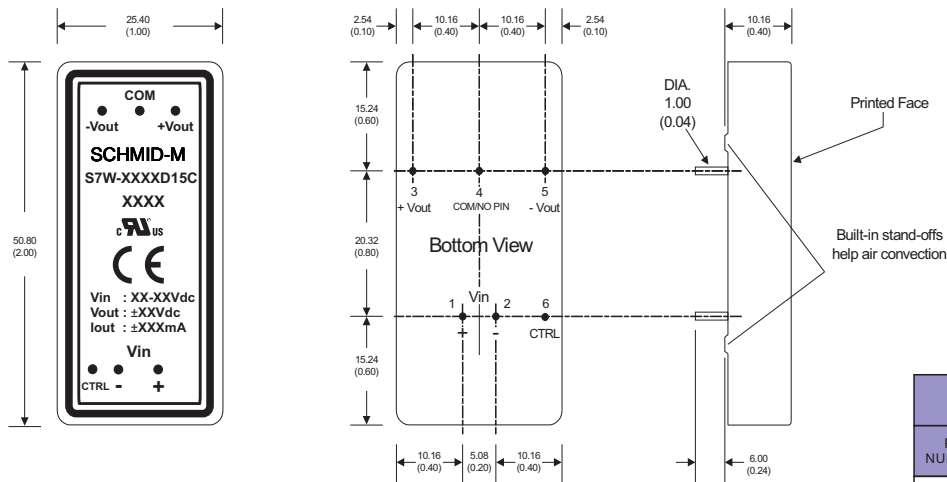

All dimensions are typical in millimeters (inches).


1. Pin diameter: 1.0 ± 0.05 (0.04 ± 0.002)
2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	Standard		Remote Control(Optional)	
	SINGLE	DUAL	SINGLE	DUAL
1	+V Input	+V Input	+V Input	+V Input
2	-V Input	-V Input	-V Input	-V Input
3	+V Output	+V Output	+V Output	+V Output
4	N.P.	Common	N.P.	Common
5	-V Output	-V Output	-V Output	-V Output
6	N.P.	N.P.	CTRL	CTRL

MECHANICAL SPECIFICATIONS

With Heat-sink

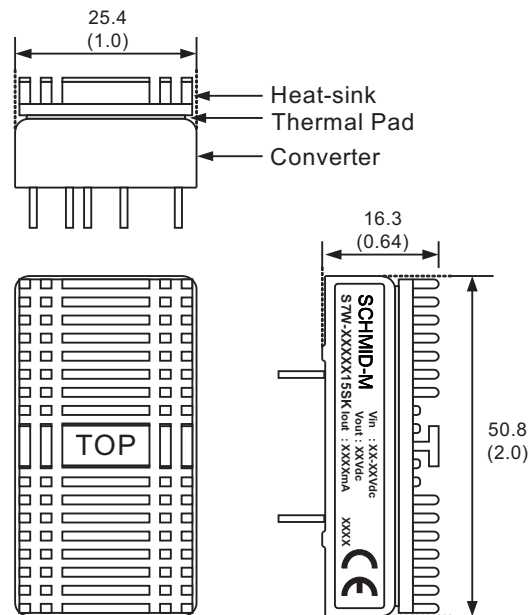

Order code: S7W-XXXXX15SK(contain: heat-sink, thermal pad)
 Material: Aluminum
 Finish: Anodic treatment (black)
 Weight: 11.2 g (0.39oz) (without converter)

Note:

1. Converters will be supplied with heat-sinks already mounted.
Please contact factory for quotation.