

# SV-15W Series

15W 4:1 Regulated Single & Dual output

## Features

- Wide 4:1 Input Range
- 1600 VDC Isolation
- Efficiency up to 90%
- -40 ~ 85 °C Operation Temperature Range
- No Minimum Load Required
- Continuous Short Circuit Protection
- Over Voltage Protection
- Over Load Protection
- Soft Start
- High Power Density: 15W in DIL-24 Package
- Remote On/Off
- Built-in EMC filter meets EN55022 classA without external components



The SV-15W series are high performance 15W single & dual output DC-DC converters. These converters are consisted with nickle-coated copper 24-pin DIL package with high performance features such as synchronous rectification, high efficiency and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3, 5.1, 12, 15,  $\pm 5$ ,  $\pm 12$ ,  $\pm 15$ Vdc. Features include high efficiency operation up to 90% .

ALL SPECIFICATIONS ARE TYPICAL AT 25°C, NOMINAL INPUT AND FULL LOAD UNLESS OTHERWISE NOTED.

OUTPUT SPECIFICATIONS		
Output Voltage Accuracy	$\pm 1\%$	
Maximum Output Current	See table	
Line Regulation	Single: $\pm 0.2\%$ , max. Dual: $\pm 0.5\%$ , max.	
Load Regulation( $I_o=0\%$ to 100%)	Single: $\pm 0.5\%$ , max. Dual: $\pm 1\%$ , max(balanced load)	
Cross Regulation (Dual Output) (1)	$\pm 5\%$	
Ripple&Noise(20MHz bandwidth) (2)	60mVpk-pk, max	
Over Voltage Protection ( Zener diode clamp)	3.3V output	3.9V
	5.1V output	6.2V
	12V output	15V
	15V output	18V
	5V output	$\pm 6.2V$
12V output	$\pm 15V$	
15V output	$\pm 18V$	
Over Current Protection	150% of FL, typ.	
Short Circuit Protection	Indefinite(hiccup) (Automatic Recovery)	
Temperature Coefficient	$\pm 0.02\%/^{\circ}C$	
Capacitive Load (3)	See table	
Transient Recovery Time (4)	250us, typ.	
Transient Response Deviation(4)	$\pm 3\%$ , max.	

INPUT SPECIFICATIONS	
Input Voltage Range	See table
Start up Time (Nominal Vin and constant resistive load)	20mS, typ.
Input Filter	Pi Type
Input Current(No-Load)	See table, max.
Input Current(Full-Load)	See table, typ.
Input Reflected Ripple Current(5)	20mApk-pk, max.
Remote On/Off (Positive logic)(6)	
ON:	3.0 ... 12Vdc or open circuit
OFF:	0 ... 1.2Vdc or Short circuit pin1 and pin2/3
OFF idle current:	5 mA, typ.

ENVIRONMENTAL SPECIFICATIONS	
Operating Ambient Temperature	-40°C ~ +85°C(See Derating Curve) -40°C ~ +60°C(For 100% load)
Maximum Case Temperature	105°C
Storage Temperature	-55°C ~ +125°C
Cooling	Nature Convection

GENERAL SPECIFICATIONS	
Efficiency	See table, min.
I/O Isolation Voltage(60 sec)	
Input/Output	1600Vdc
Case/Input & Output	1600Vdc
Isolation Resistance	1000 M $\Omega$ , min.
Isolation Capacitance	2000 pF, typ.
Switching frequency	250K~330kHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	> 410 Khrs
Safety Standard : ( designed to meet )	IEC 60950-1



EMC CHARACTERISTICS		
Radiated Emissions	EN55022	CLASSA
Conducted Emissions	EN55022	CLASSA
ESD	IEC61000-4-2	Perf. Criteria B
RS	IEC61000-4-3	Perf. Criteria A
EFT (7)	IEC61000-4-4	Perf. Criteria B
Surge (7)	IEC61000-4-5	Perf. Criteria B
CS	IEC61000-4-6	Perf. Criteria A
PFMF	IEC61000-4-8	Perf. Criteria A

PHYSICAL SPECIFICATIONS	
Case Material	Nickel-coated Copper
Base Material	Non-conductive black plastic (UL94V-0 rated)
Pin Material	$\Phi 0.5$ mm Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	20.0g
Dimensions	1.25"x0.8"x0.40"

ABSOLUTE SPECIFICATIONS (8)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(1000mS)	24 Models 50Vdc ,max. 48 Models 100Vdc ,max.
Soldering Temperature(1.5mm from case 10 sec,max.)	260°C,max.

## SV - 15W 4:1 Regulated Single & Dual output

### PART NUMBER STRUCTURE

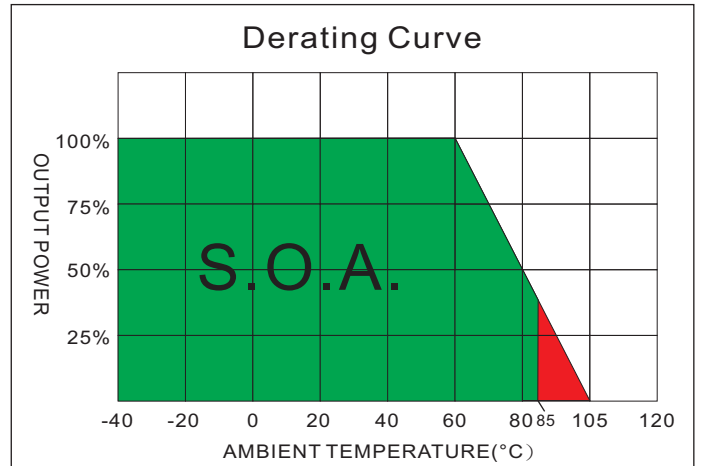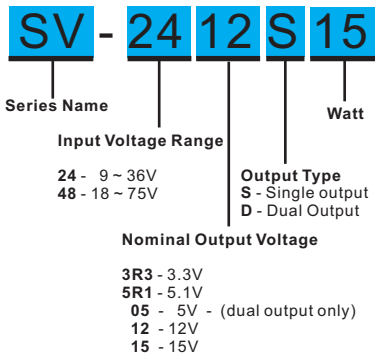

### MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(μF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
SV-243R3S15	9-36	15	640	3.3	0	4000	88	4700
SV-245R1S15	9-36	15	724	5.1	0	3000	90	3300
SV-2412S15	9-36	15	710	12	0	1250	90	600
SV-2415S15	9-36	15	710	15	0	1000	90	400
SV-2405D15	9-36	15	744	±5	0	1500	86	1500
SV-2412D15	9-36	15	718	±12	0	625	89	288
SV-2415D15	9-36	15	710	±15	0	500	90	200
SV-483R3S15	18-75	15	316	3.3	0	4000	89	4700
SV-485R1S15	18-75	15	366	5.1	0	3000	89	3300
SV-4812S15	18-75	15	355	12	0	1250	90	600
SV-4815S15	18-75	15	355	15	0	1000	90	400
SV-4805D15	18-75	15	372	±5	0	1500	86	1500
SV-4812D15	18-75	15	359	±12	0	625	89	288
SV-4815D15	18-75	15	355	±15	0	500	90	200


### NOTE

- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- Measured with a 1.0μF ceramic capacitor.
- Tested by minimal Vin and constant resistive load.
- Tested by normal Vin and 25% load step change (75%-50%-25% of Io).
- Measured Input reflected ripple current with a simulated source inductance of 12μH and a source capacitor Cin(47μF, ESR<1.0Ω at 100KHz).
- The remote on/off control pin is referenced to -Vin(pin2).
- An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.  
The filter capacitor suggest: Nippon chemi-con KY series, 2pcs 330μF/100V parallel connection or 680μF/100V.
- Exceeding the absolute ratings of the unit could cause damage.  
It is not allowed for continuous operating.
- Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.

TEST CONFIGURATIONS


**Input Reflected Ripple Current Test Step**

Input reflected ripple current is measured through a source inductor  $L_{in}$ (12uH) and a source capacitor  $C_{in}$ (47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

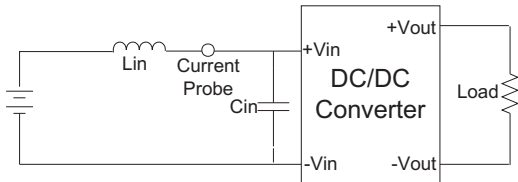


**Output Ripple & Noise Measurement Test**

Use a capacitor  $C_{out}$ (1.0uF) measurement. The Scope measurement bandwidth is 0-20MHz.

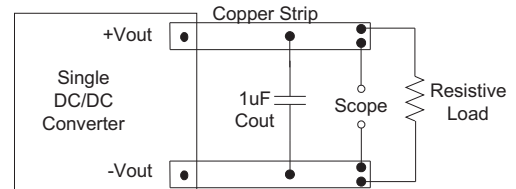

MECHANICAL SPECIFICATIONS

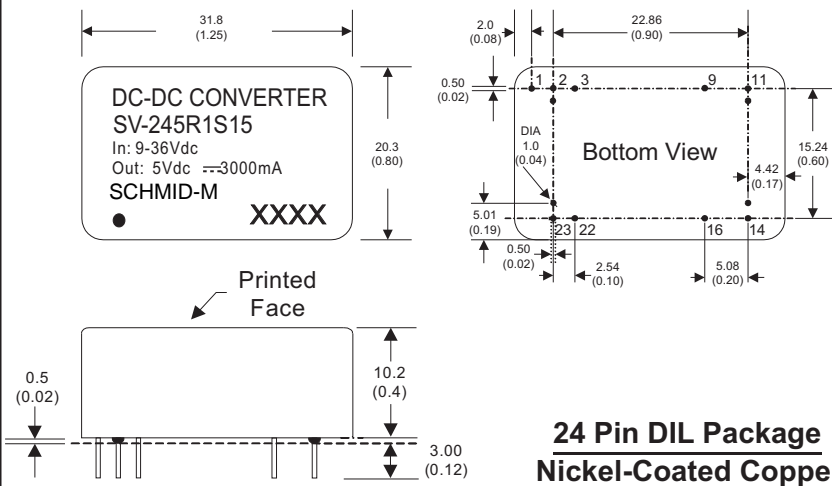

**24 Pin DIL Package  
Nickel-Coated Copper**

- All dimensions are typical in millimeters ( inches ).
1. Pin diameter:  $0.5 \pm 0.05$  (  $0.02 \pm 0.002$  )
  2. Pin pitch and length tolerance:  $\pm 0.35$  (  $\pm 0.014$  )
  3. Case Tolerance:  $\pm 0.5$  (  $\pm 0.02$  )
  4. Stand-off tolerance:  $\pm 0.1$  (  $\pm 0.004$  )

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	Remote On/Off	Remote On/Off
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input