


# SCHMID-M

## SNW -20W Series

### 20W 4:1 Regulated Single & Dual output

#### Features

- Ultra Wide 4:1 Input Range
- 1600 VDC Isolation
- No Minimum Load Required
- Efficiency up to 89%
- Extended Operating Temperature Range -40 ~ 75°C max.
- Adjustable Output Voltage
- Remote On/Off Control (CTRL)
- Continuous Short Circuit Protection
- Over Current Protection
- Over Voltage Protection
- Soft Start



The SNW series is a family of cost effective 20W single & dual output DC-DC converters. These converters combine nickle-coated copper package in a 1"x1" case with high performance features, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3, 5, 12, 15,  $\pm 12$ ,  $\pm 15$ Vdc. High performance features include high efficiency operation up to 90% and output voltage accuracy of  $\pm 1\%$  maximum.

ALL SPECIFICATIONS ARE TYPICAL AT 25°C, NOMINAL INPUT AND FULL LOAD UNLESS OTHERWISE NOTED.

OUTPUT SPECIFICATIONS	
Output Voltage Accuracy	$\pm 1\%$
Output Voltage Adjustability(Trim)	Single output: $\pm 10\%$ , max
Maximum Output Current	See table
Line Regulation	$\pm 0.5\%$ , max
Load Regulation( I <sub>o</sub> =0% to 100%)	Single: $\pm 0.5\%$ , max Dual: $\pm 1\%$ , max(balanced load)
Cross Regulation (Dual Output) (1)	$\pm 5\%$
Ripple & Noise(20MHz bandwidth) (2)	3.3 & 5.0V models: 75mVp-p, max Other models: 100mVp-p, max
Over Voltage Protection ( Zener diode clamp)	3.3V output 3.9V 5V output 6.2V 12V output 15V 15V output 18V $\pm 12$ V output $\pm 15$ V $\pm 15$ V output $\pm 18$ V
Over Current Protection	140% of FL, typ
Short Circuit Protection	Indefinite(hiccup) (Automatic Recovery)
Temperature Coefficient	$\pm 0.02\%/^{\circ}\text{C}$
Capacitive Load (3)	See table
Transient Recovery Time (4)	250us, typ

INPUT SPECIFICATIONS	
Input Voltage Range	See table
Under Voltage Lockout	
24V Modes	Module ON / OFF 8.6Vdc / 7.9Vdc, typ
48V Modes	Module ON / OFF 17.8Vdc / 15.5Vdc, typ
Start up Time (Nominal Vin and constant resistive load)	30mS, typ
Input Filter	Pi Type
Input Current(No-Load)	See table, max
Input Current(Full-Load)	See table, typ
Input Reflected Ripple Current(5)	30mA <sub>p-p</sub> , typ
Remote On/Off (Positive logic)(6)	
ON:	3.0 ... 12Vdc or open circuit
OFF:	0 ... 1.2Vdc or Short circuit pin2 and pin 3
OFF idle current:	5 mA, typ

ENVIRONMENTAL SPECIFICATIONS	
Operating Ambient Temperature	-40°C ~ +75°C(See Derating Curve) -40°C ~ +55°C(For 100% load)
Maximum Case Temperature	105°C
Storage Temperature	-55°C ~ +125°C
Cooling	Nature Convection

GENERAL SPECIFICATIONS	
Efficiency	See table, typ
I/O Isolation Voltage(3 sec)	
Input/Output	1600Vdc
Case/Input & Output	1600Vdc
Isolation Resistance	1000 M $\Omega$ , min
Isolation Capacitance	1500 pF, typ.
Switching frequency	330kHz, typ
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>560 khrs
Safety Standard (designed to meet)	IEC/EN 60950-1



EMC CHARACTERISTICS		
Radiated Emissions	EN55022	CLASS A
Conducted Emissions(7)	EN55022	CLASS A
ESD	IEC61000-4-2	Perf. Criteria A
RS	IEC61000-4-3	Perf. Criteria A
EFT(8)	IEC61000-4-4	Perf. Criteria A
Surge (8)	IEC61000-4-5	Perf. Criteria A
CS	IEC61000-4-6	Perf. Criteria A
PFMF	IEC61000-4-8	Perf. Criteria A

PHYSICAL SPECIFICATIONS	
Case Material	Nickel-coated Copper
Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	$\varnothing 1.0$ mm Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	19.0g
Dimensions	1.00"x1.00"x0.40"

ABSOLUTE SPECIFICATIONS (9)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
24 Models	50 Vdc,max.
48 Models	100 Vdc,max.
Soldering Temperature (1.5mm from case 10 sec. Max.)	260°C max.

## SNW - 20W 4:1 Regulated Single & Dual output

### PART NUMBER STRUCTURE

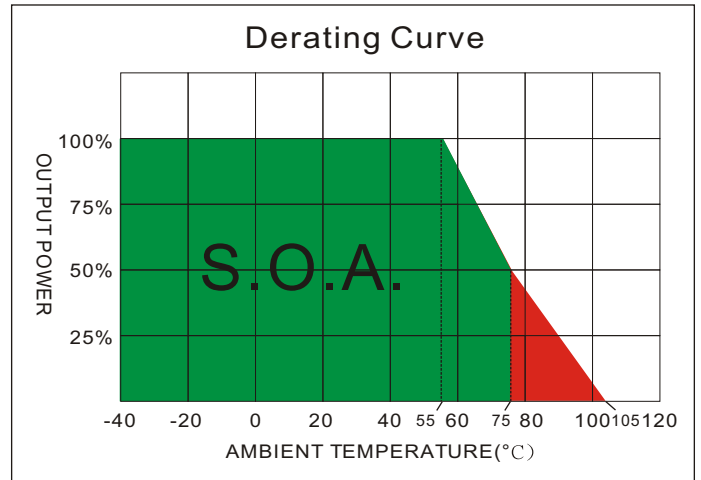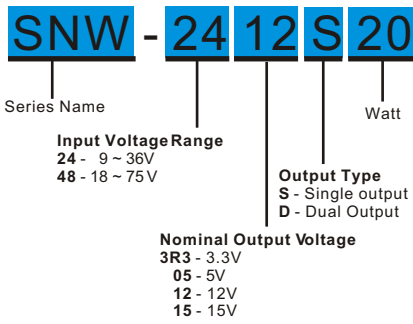





### MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
SNW-243R3S20	9-36	50	703	3.3	0	4500	88	10000
SNW-2405S20	9-36	50	936	5	0	4000	89	5000
SNW-2412S20	9-36	22	936	12	0	1670	89	850
SNW-2415S20	9-36	22	936	15	0	1330	89	700
SNW-483R3S20	18-75	30	352	3.3	0	4500	88	10000
SNW-4805S20	18-75	30	468	5	0	4000	89	5000
SNW-4812S20	18-75	15	468	12	0	1670	89	850
SNW-4815S20	18-75	15	468	15	0	1330	89	700
SNW-2412D20	9-36	25	936	±12	0	±833	89	±470
SNW-2415D20	9-36	25	936	±15	0	±667	89	±330
SNW-4812D20	18-75	15	468	±12	0	±833	89	±470
SNW-4815D20	18-75	15	468	±15	0	±667	89	±330


### NOTE

- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- Measured with a 1.0uF ceramic capacitor and 10uF tantalum capacitor.
- Tested by minimal Vin and constant resistive load.
- Tested by normal Vin and 25% load step change ( 75%-50%-25% of Io ).
- Measured Input reflected ripple current with a simulated source inductance of 12uHand a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz).
- The remote on/off control pin is referenced to -Vin(pin2).
- Input filter meets EN 55022 Class A without external components.
- An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.  
The filter capacitor SCHMID-M suggest: Nippon chemi-con KY series, 220uF/100V
- Exceeding the absolute ratings of the unit could cause damage.  
It is not allowed for continuous operating.

## SNW - 20W 4:1 Regulated Single & Dual output

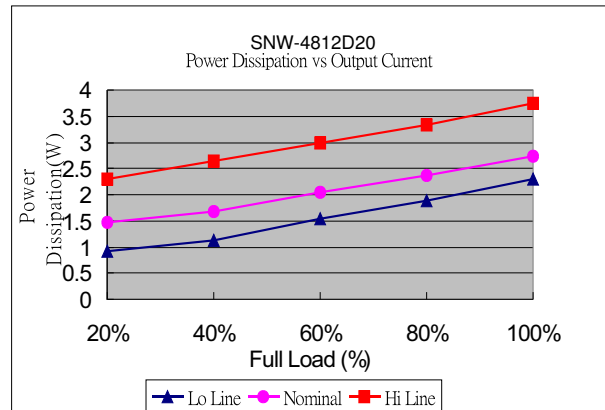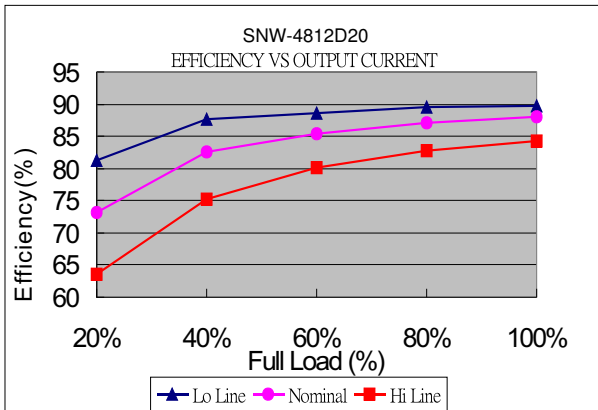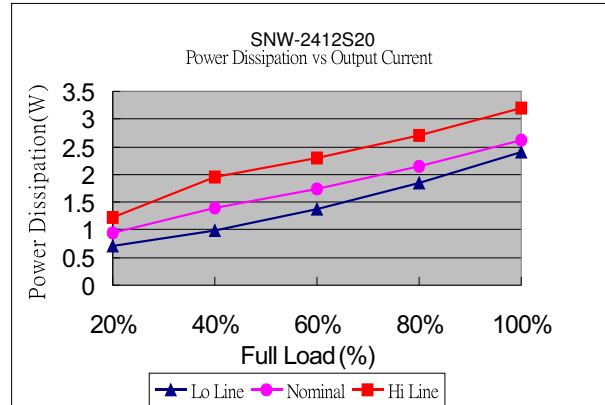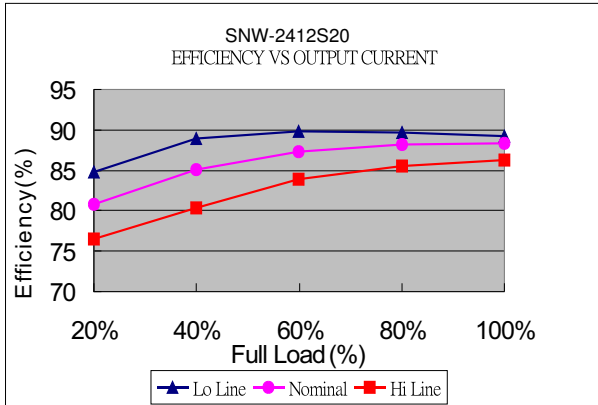

## MECHANICAL SPECIFICATIONS

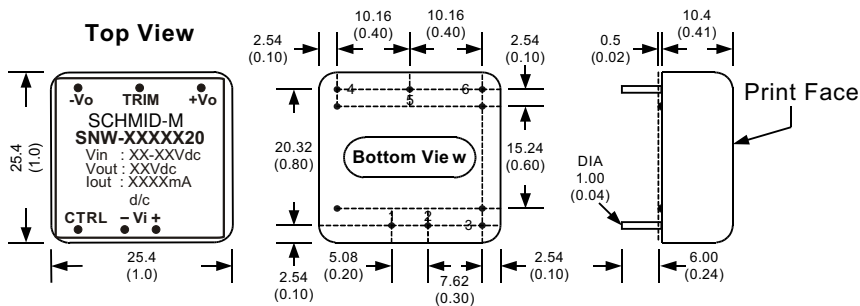

All dimensions are typical in millimeters ( inches ).

1. Pin diameter:  $1.0 \pm 0.05$  (  $0.04 \pm 0.002$  )
2. Pin pitch and length tolerance:  $\pm 0.35$  (  $\pm 0.014$  )
3. Case Tolerance:  $\pm 0.5$  (  $\pm 0.02$  )
4. Stand-off tolerance:  $\pm 0.1$  (  $\pm 0.004$  )

## PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	CTRL	CTRL
4	+Vout	+Vout
5	Trim	Com
6	-Vout	-Vout

## EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method as below. (single output models only )

