



www.atd-elektronik.cz



THERMAL SYSTEMS



# Nextreme™ Performance Chillers



## The Next-Generation Chillers

The Nextreme™ Performance Chiller Platform from Laird Thermal Systems is the next generation of recirculating chillers that feature premium components at a mid-level price. The platform features high-quality components, environmentally friendly refrigerants, low-noise designs and a user-friendly operation for reliable, precise temperature control of analytical, medical and industrial equipment.

The Nextreme chiller line is designed to cool well below ambient temperature and dissipate heat away from thermally sensitive equipment. It is designed for OEM companies, businesses both large and small, and research facilities, laboratories and universities that need an energy-efficient chiller platform versatile enough to support the cooling needs of their entire equipment installation.

## Fits Your Application Needs

Design engineers in every industry are facing demands for higher performance with reduced energy consumption and lower noise levels. The Nextreme Performance Chiller Platform offers a high coefficient of performance in a smaller and lighter package compared to previous versions. Laboratory technicians, R&D engineers and equipment operators will appreciate the quiet, “set it and forget it” operation and high performance components that minimize system downtime.

### Industrial

- Laser Cutting & Marking
- Printing
- X-Ray Scanning
- Packaging
- Additive Manufacturing
- Semiconductor Fabrication

### Analytical

- Mass Spectrometers
- Chromatography
- Microscopes
- Biotech

### Medical

- Imaging
- Pharmaceutical
- Surgical Laser

## The Nextreme Performance Chiller Platform




**NRC400**

**NRC1200**

**NRC2400**

**NRC5000**

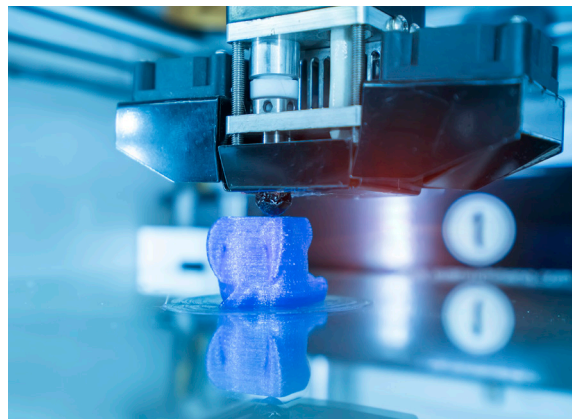

Performance	NRC400			NRC1200			NRC2400			NRC5000		
	10°C	20°C	30°C	10°C	20°C	30°C	10°C	20°C	30°C	10°C	20°C	30°C
Cooling capacity <sup>1</sup>	0.3 kW	0.4 kW	0.5 kW	0.7 kW	1.6 kW	2.3 kW	1.7 kW	2.8 kW	3.9 kW	3.1 kW	4.9 kW	5.9 kW
Setpoint Range	-5°C to 40°C			-10°C to 40°C			-10°C to 40°C			-10°C to 40°C		
Temperature Stability	±0.05°C			±0.1°C			±0.1°C			±0.1°C		
Nominal Flow Rate <sup>1</sup> (50Hz / 60Hz)	1 lpm @ 1.05 bar			15 lpm @ 1.5 bar / 15 lpm @ 2.6 bar			15 lpm @ 1.5 bar / 15 lpm @ 2.6 bar			15 lpm @ 1.7 bar / 15 lpm @ 2.8 bar		
Maximum available pressure	1.18 bar			5.3 bar			5.3 bar			5.3 bar		
Refrigerant	N/A			R 513A			R 513A			R 513A		
Storage	0°C to 50°C			-25°C to 70°C			-25°C to 70°C			-25°C to 70°C		
Humidity	5% to 95%, non-condensing			5% to 95%, non-condensing			5% to 95%, non-condensing			5% to 95%, non-condensing		
Operation	Water or Water/Glycol			Water or Water/Glycol			Water or Water/Glycol			Water or Water/Glycol		
Temperature <sup>2</sup>	10°C to 40°C			15°C to 40°C			15°C to 40°C			15°C to 40°C		
Relative Humidity	35% to 85%			30% to 80%			30% to 80%			30% to 80%		
Altitude	≤2,000 meters			≤2,000 meters			≤2,000 meters			≤2,000 meters		
Input	115 - 230 VAC			100 - 120 VAC or 220 - 230 VAC			220 - 230 VAC			220 - 230 VAC		
Frequency	50/60 Hz			50/60 Hz			50/60 Hz			50/60 Hz		
Physical	27.4 X 41.3 X 40			45 X 52 x 67 cm			48 X 52 x 75 cm			63 x 59 x 91 cm		
Weight (w/o coolant)	24 kg			48 kg			54 kg			100 kg		
Coolant Capacity	1 L			5 L			5 L			5 L		
Couplings	Quick-Connect (3/8 in ID Tubing)			1/2" NPT			1/2" NPT			1/2" NPT		



## Compressor-Based Chillers

- High performance variable speed motors provide **lower noise and 50% reduced power consumption** compared to previous versions.
- **Half the Global Warming Potential** compared to traditional HFC refrigerants.
- Optical fluid level sensors **improves reliability** compared to mechanical fluid switches
- The optional “hot swappable” 5-micron water filter **maximizes uptime**
- **Intuitive LCD** touchscreen display

## Thermoelectric-Based Chillers

- Solid-state Thermoelectrics offer **high reliability with minimal maintenance**
- Thermoelectrics deliver **high temperature stability** at 0.05°C
- **Portable and compact form factor**
- Premium components result in **low noise and vibration**
- **Zero Global Warming Potential** as no harmful refrigerants are being used
- Centrifugal pump offers **low pulsation** for cooling sensitive optoelectronics
- **Intuitive LCD** touchscreen display



## Model Numbering



[www.atd-elektronik.cz](http://www.atd-elektronik.cz)

Example: NRC2400-A1-20-ST1

Basic Model No	Cooling Engine	Electrical Configuration	Pump Options
<b>Compressor-based chillers</b>			
<b>NRC1200</b> <b>NRC2400</b> <b>NRC5000</b>	<b>A1</b> Air Cooled/ R513A	<b>10'</b> 100-120V~, 1ph, 50/60 Hz <b>20</b> 220-230V~, 1ph, 50/60Hz	<b>ST1</b> Stainless, Turbine Pump
<b>Thermoelectric-based chillers</b>			
<b>NRC400</b>	<b>TO</b> Air Cooled/ Thermoelectric	<b>00</b> 115-230V~, 2.17-4.35 A, 1ph, 50/60Hz	<b>PC1</b> Plastic, Centrifugal Pump

1. Only available with NRC1200

### LTS-BRO-NEXTREME-PERFORMANCE-CHILLER-PLATFORM 050422



Any information furnished by Laird and its agents, whether in specifications, data sheets, product catalogues or otherwise, is believed to be (but is not warranted as being) accurate and reliable, is provided for information only and does not form part of any contract with Laird. All specifications are subject to change without notice. Laird assumes no responsibility and disclaims all liability for losses or damages resulting from use of or reliance on this information. All Laird products are sold subject to the Laird Terms and Conditions of sale (including Laird's limited warranty) in effect from time to time, a copy of which will be furnished upon request.

#### Trademarks

© Copyright 2020-2022 Laird Thermal Systems, Inc. All rights reserved. Laird™, the Laird Ring Logo, and Laird Thermal Systems™ are trademarks or registered trademarks of Laird Limited or its subsidiaries. Nextreme™ is a trademark of Laird Thermal Systems, Inc. All other marks are owned by their respective owners.