

MINIATURE DOUBLE OVEN ULTRA PRECISION OCXO MV209

Features:

- Low sensitivity to rapid changes of ambient temperature
- Stability vs. temperature – up to $\pm 2 \times 10^{-10}$
- Short term stability – up to 2×10^{-12} per 1 sec
- Aging – up to $\pm 2 \times 10^{-8}$ /year
- Standard CO-08 package with size of 36x27x19 mm

ORDERING GUIDE: MV209 – B 05 E – 10.0 MHz- LN


| Availability of certain stability vs. operating temperature | | $\pm 5 \times 10^{-10}$ | $\pm 3 \times 10^{-10}$ | $\pm 2 \times 10^{-10}$ | $\pm 1 \times 10^{-10}$ |
|---|--------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | 05 | 03 | 02 | 01 |
| A | 0...+55 °C | A | A | A | C |
| B | -10...+60 °C | A | A | A | C |
| C | -20...+70 °C | A | A | C | C |
| D | -40...+70 °C | A | C | C | C |

For other temperature ranges see designation at the end of Data Sheet

| Availability of certain aging values for certain frequencies | | Standard frequencies | | |
|--|------------------------------|----------------------|-----------|----------|
| | | 5.0 MHz | 8.192 MHz | 10.0 MHz |
| F | $\pm 5 \times 10^{-8}$ /year | A | A | A |
| E | $\pm 3 \times 10^{-8}$ /year | A | A | A |
| D | $\pm 2 \times 10^{-8}$ /year | A | A | A |
| C | $\pm 1 \times 10^{-8}$ /year | A | C | C |

A – available, C – consult factory

Package drawing:

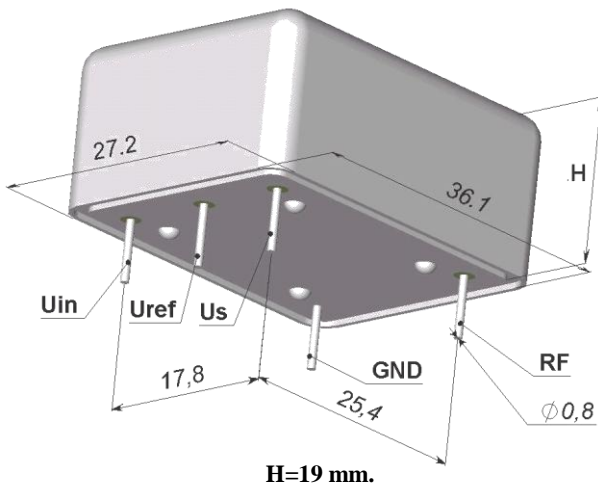

| Phase noise, dBc/Hz, for 10MHz | - | LN |
|--------------------------------|-------|-------|
| 1 Hz | <-95 | <-100 |
| 10 Hz | <-125 | <-130 |
| 100 Hz | <-143 | <-148 |
| 1000 Hz | <-152 | <-155 |
| 10000 Hz | <-158 | <-160 |

| | |
|--|--|
| Short term stability (Allan deviation) per 1 sec, typical | < 5×10^{-12} |
| Optional: | < 2×10^{-12} < 1×10^{-12} |
| Frequency stability vs. load changes | < $\pm 1 \times 10^{-10}$ |
| Frequency stability vs. power supply changes | < $\pm 1 \times 10^{-10}$ |
| Warm-up time within accuracy of $<\pm 5 \times 10^{-8}$ @ 25°C | <10 min |
| Power supply (Us) | 12V $\pm 5\%$ |
| Steady state current consumption @ 25°C (still air) | <150 mA |
| Peak current consumption during warm-up @ 25°C | <700 mA |
| Frequency pulling range | > $\pm 4 \times 10^{-7}$ |
| with external control voltage range (Uin) | 0...+5 V |
| Reference voltage (Uref) | +5V |

| | |
|---------------------------|--------------|
| Vibrations: | |
| Frequency range | 10-500 Hz |
| Acceleration | 10g |
| Shock: | |
| Acceleration | 150 g |
| Duration | 3 ± 1 ms |
| Storage temperature range | -55...+80 °C |

| | |
|----------------------|------------------|
| Output | SIN |
| Level | > 400 mV RMS |
| Load | 50 Ohm $\pm 5\%$ |
| Harmonic suppression | >30dBc |

ADDITIONAL NOTES:

- Showed values of frequency stability vs. temperature usually are tested in Still Air test conditions. Please inform factory about different conditions in operation to provide appropriate tests.
- Please consult factory for daily aging values. Normally typical correspondence of daily aging per day to aging per year is as following: $\pm 5 \times 10^{-8}$ /year - $\pm 5 \times 10^{-10}$ /day; $\pm 3 \times 10^{-8}$ /year - $\pm 3 \times 10^{-10}$ /day; $\pm 2 \times 10^{-8}$ /year - $\pm 2 \times 10^{-10}$ /day.
- For non standard operating temperature ranges please use the following two letters designations (first letter for the lower limit, second letter for the upper limit), °C:

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | U | W | X |
| -60 | -55 | -50 | -45 | -40 | -30 | -20 | -10 | 0 | +10 | +30 | +40 | +45 | +50 | +55 | +60 | +65 | +70 | +75 | +80 | +85 |