

MINIATURE HIGH FREQUENCY PRECISION LOW PHASE NOISE OCXO MV269

Features:

- Small package size 21x13x9.5 mm (DIL 14)
- Low Phase Noise <-170 dBc/Hz @ 100 kHz offset
- Frequency range: 60-120 MHz

Output signal	Power Supply
SIN	5 V
HCMOS	3.3 V


ORDERING GUIDE: MV269-B 100 J-5V-2-100M

Availability of certain stability vs. operating temperature range		$\pm 5.0 \times 10^{-7}$	$\pm 3.0 \times 10^{-7}$	$\pm 1.0 \times 10^{-7}$	$\pm 7.5 \times 10^{-8}$	$\pm 5.0 \times 10^{-8}$
		500	300	100	75	50
A	0...+55 °C	A	A	A	A	A
B	-10...+60 °C	A	A	A	A	C
C	-20...+70 °C	A	A	A	C	NA
D	-40...+70 °C	A	A	C	NA	NA
EX	-40...+85 °C	A	NA	NA	NA	NA

Phase noise, dBc/Hz (for 80-100 MHz)					
Option	1	2	3	4	5
Power Supply, V	3.3	3.3-5.0	5.0	5.0	5.0
10 Hz	-80	-85	-90	-92	-95
100 Hz	-115	-120	-125	-127	-127
1000 Hz	-140	-145	-150	-152	-153
10000 Hz	-150	-155	-162	-165	-167
100000 Hz	-160	-163	-165	-168	-170

Aging	
J	$\pm 5 \times 10^{-7}$ / year
I	$\pm 3 \times 10^{-7}$ / year
H	$\pm 2 \times 10^{-7}$ / year
G	$\pm 1 \times 10^{-7}$ / year

A – available, NA – not available, C – consult factory

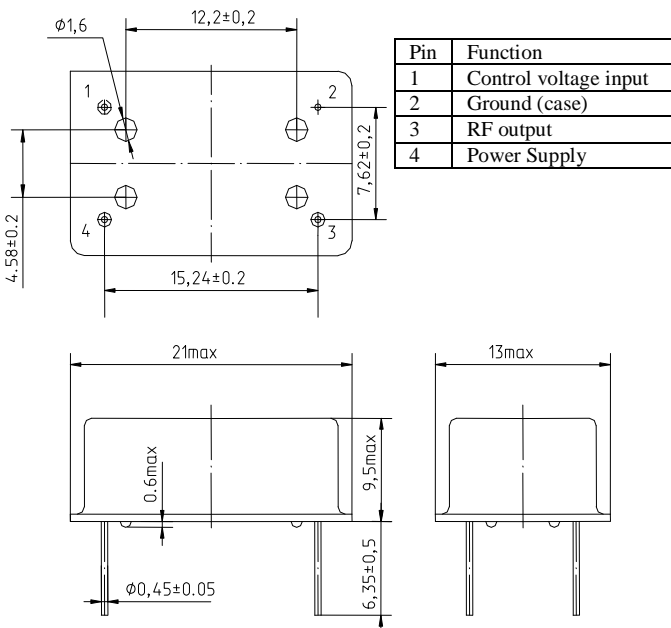

Output	HCMOS	
Power supply (Us)	3.3 V \pm 0.2V	5.0 V \pm 0.15V
Steady state current consumption @ 25°C	< 250 mA	< 180 mA
Peak current consumption during warm-up @ 25°C	< 500 mA	< 500 mA
-Logical «1», V	≥ 2.5	≥ 3.6
-Logical «0», V	≤ 0.4	≤ 0.4
Frequency pulling range	$> \pm 2.0 \times 10^{-6}$	$\geq \pm 2.5 \times 10^{-6}$
Frequency stability vs. power supply changes	$< \pm 2 \times 10^{-8}$	
Warm-up time within accuracy of $< \pm 2 \times 10^{-7}$ @ 25°C $\pm 2 \times 10^{-7}$, min	< 2	

Shock:	
-Acceleration	200 g
-Storage temperature range	-55...+85 °C

Vibrations:	
Frequency range	10-500 Hz
Acceleration	5 g

