RF SPEC.

1. Frequency Range:DC-6GHZ
2. Impedance:50 ohm

	DC-3GHZ	3-6GHZ
3. Insertion Loss	<0.20dB	<0.30dB
4. VSWR	<1.20	<1.35
5. Isolation	>70dB	>60dB
6. Power Handing:	>85w	>50w

7. DC Supply: DC12V/185mA DC24V/90mA
8. Life cycling>1000000
9. Tempreture range: -30 - +75 degree
10. RF Interface: SMA female

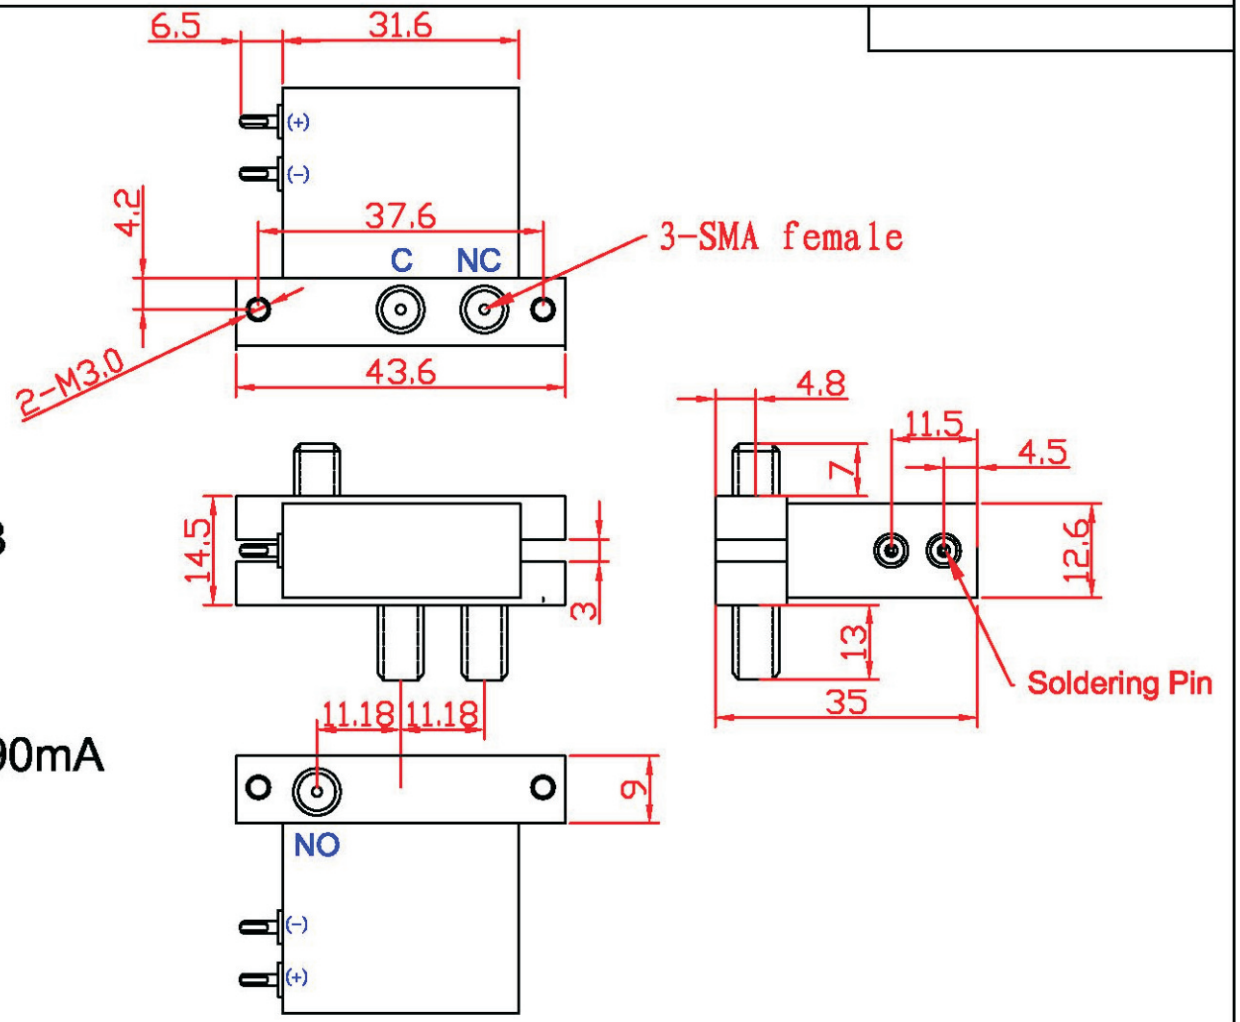

					SPDT Failsafe Type DC-6GHZ			C1-1206
				2011-4-18	A	B	C	1:1
								1

Beijing CTE Communication