
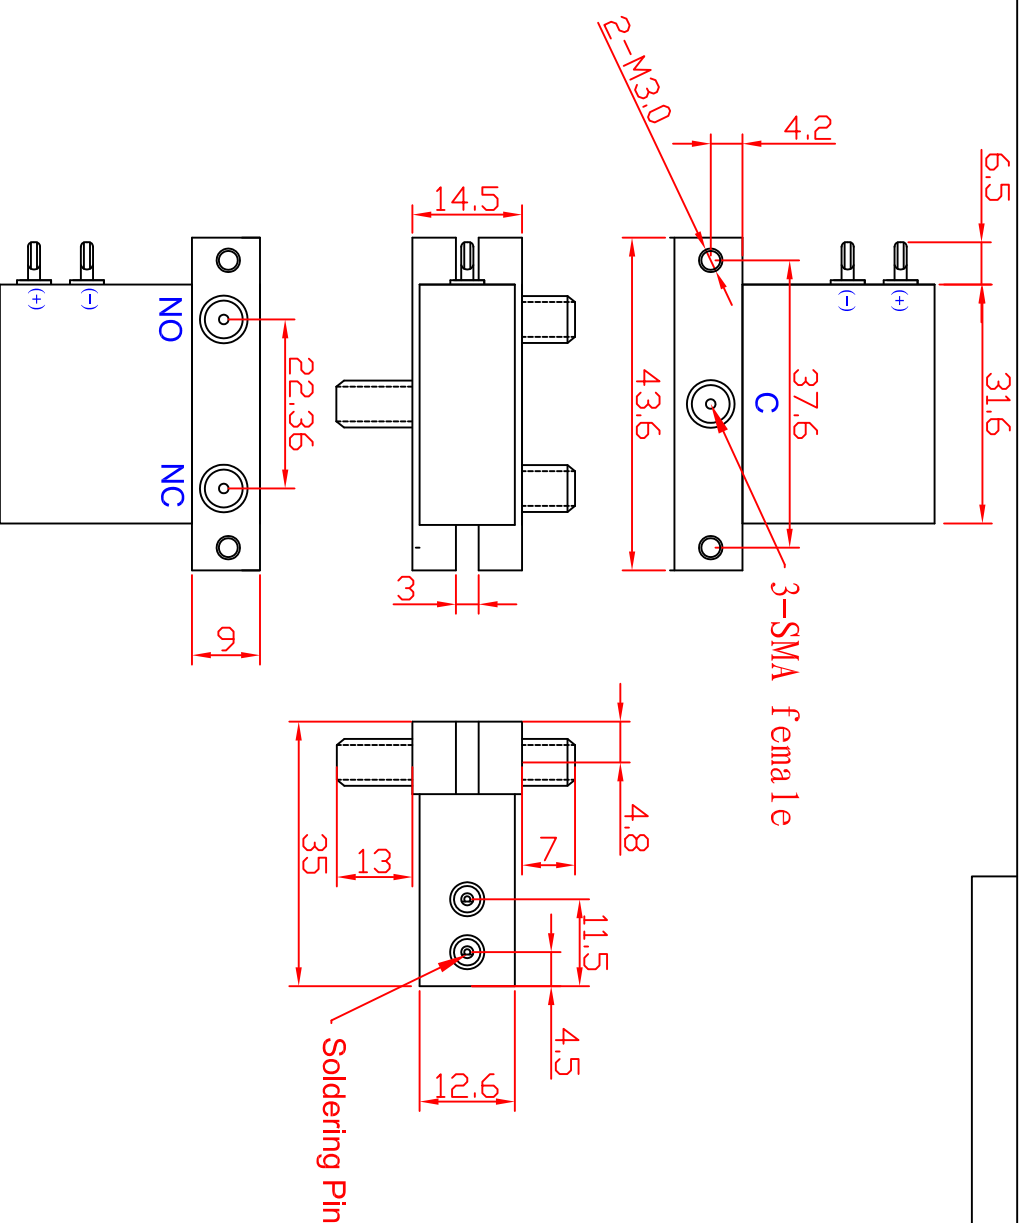


RF SPEC.

1. Frequency Range: DC-6GHz
2. Impedance: 50 ohm
3. Insertion Loss DC-3GHz 3-6GHz
 <0.20dB <0.30dB
4. VSWR <1.20 <1.35
5. Isolation >70dB >60dB
6. Power Handling: 85w 50w
7. DC Supply: DC12V/185mA DC24V/90mA
8. Life cycling >1000000
9. Temperature range: -30 - +75 degree
10. RF Interface: SMA female



					SPDT Failsafe Type				
					DC-6GHz			C2-1206	
					2011-4-18				
		A	B	C	1:1				1