

RF SPEC.

Impedance 50 ohm

Frequency Range DC-18GHZ

DC-3GHZ 3-6GHZ 6-12.4GHZ 12.4-18GHZ

Insertion Loss <0.2dB <0.3dB <0.4dB <0.5dB

Isolation >80dB >70dB >60dB >60dB

VSWR <1.20 <1.30 <1.40 <1.50


Power Handling(CW) 85W 50W 30W 20W

Electronical Life >100000

RF Interface SMA female

Material Housing -- AL6061

Center Pin -- BeCu

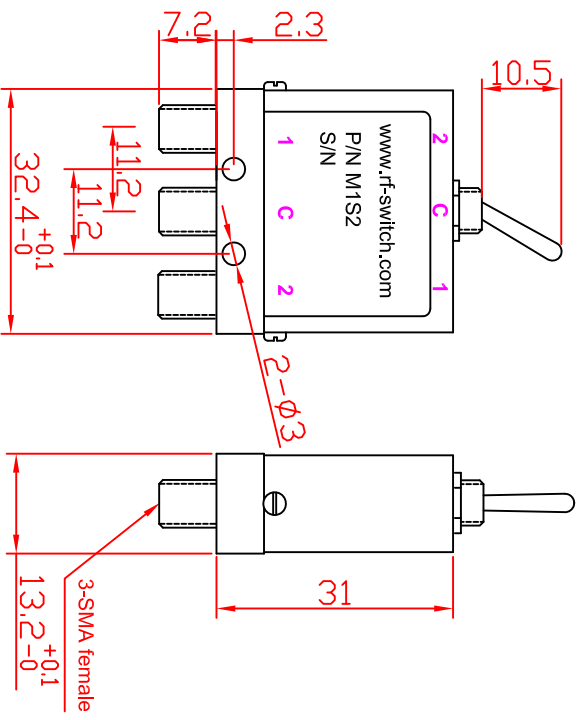

Manual Coaxial Switch				M1S2	
SPDT					
DC-18GHZ					

A	B	C	1:1		1
2012-10-17					