
2XSP6T RF Switches Assembly DC-18GHZ **USB and Manual Controlled**

Features

- . 2 SP6T RF Electromechanical Switches(Normally Open Type)
- . Broadband RF Frequency Range:DC-18GHZ
- . USB Remote and Manual Local Controlled
- . Plug and Play For USB HID Interface
- . Operating in Windows 32/64 Bit System
- . Local LED Indicator For RF Patch

Applications:

- . ATE System
- . EMC testing
- . Lab and RF Control equipment
- . Test for WLAN,WIFI,LTE and Wireless System



RF SPEC.


Frequency Range	DC-3GHZ	3-6GHZ	6-12GHZ	12-18GHZ
VSWR	<1.20	<1.30	<1.40	<1.50
Insertion Loss	<0.2dB	<0.3dB	<0.4dB	<0.5dB
Isolation	>80dB	>70dB	>60dB	>60dB
Power Handing(CW)	100W	70W	50W	40W

- . RF Impedance: 50 ohm
- . RF Interface:SMA female
- . Switching Time: <15ms
- . Life:>1000000cycles
- . Switching Sequence:Break Before Make
- . Operating Temperature: 0 ~ +50°C
- . Power Supply:AC100-240V/10W

Accessories:

- . **2XSP6T RF Assembly Benchttop Case**
- . **USB Cable Length=1.5m**
- . **AC Power Cable**
- . **Remot Controlled Software**

SIZE

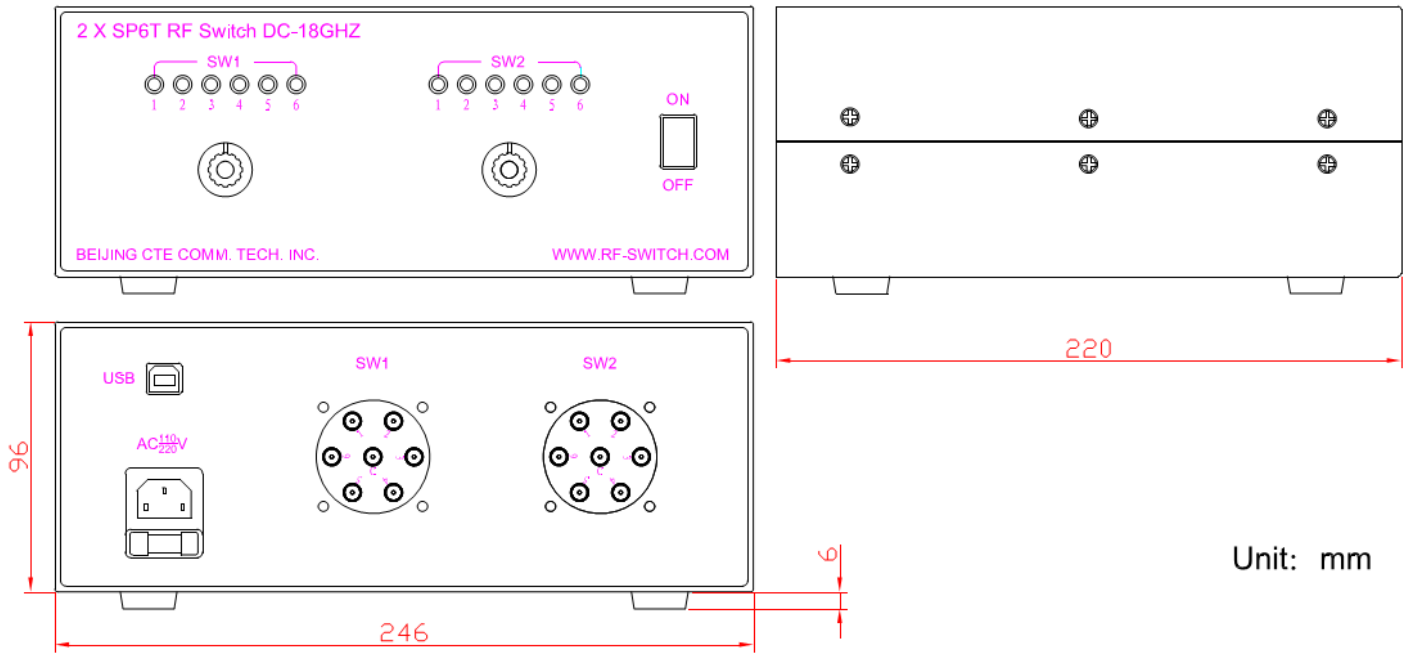

Unit: mm

