




1 2 3 4 5 6 7 8



A  
B  
C  
D  
E  
F  
G  
H

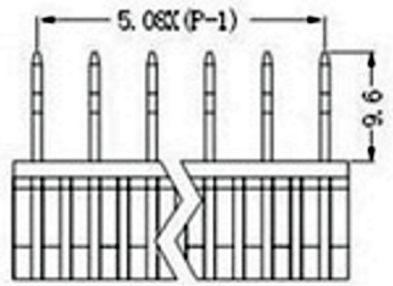

**A Type: 6.3mm**

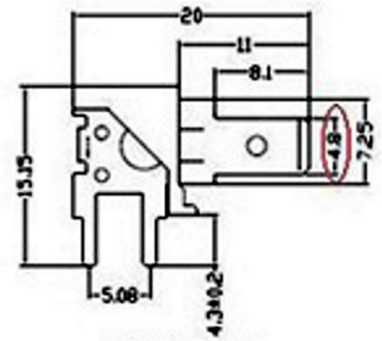

**B Type: 4.8mm**

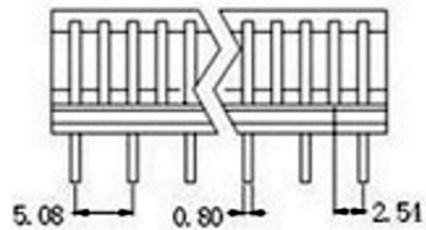

**C Type: 2.80mm**



Standard	UL	CE
Rated Voltage	250V	300V
Rated Current	12A	20A
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	5.08/7.62/10.16mm	
Poles	2P, 3P---25P	
Housing	PC, UL94V-0	
Solder Pins	Brass, Tin Plated	

RoHS Compliant		<b>SCHMID-M</b>	
APPD.		TOLERANCE	PART NAME
DWG.	BRAUN	0 ± .00 ± ANG. ±	Fuse Terminal Block
DATE	2013/05/14	UNIT M M	PART NO.
PAGE	1 OF 1	SIZE. A 4	SM C09 75824 XX RY
		REV. A	

1 2 3 4 5 6 7 8