

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C



D

E


F

G



H

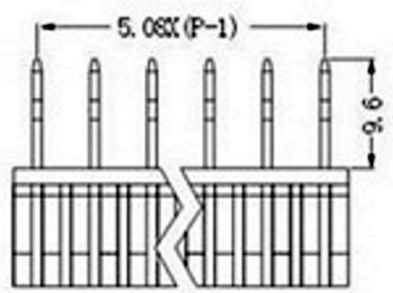

A Type: 6.3mm

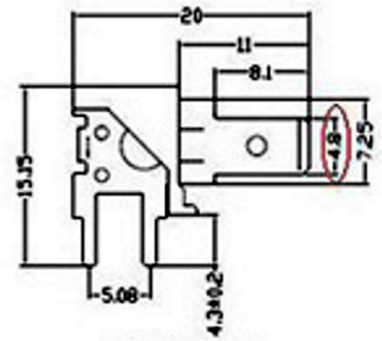

B Type: 4.8mm

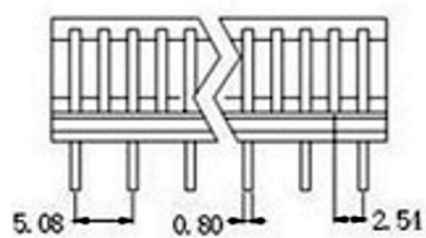

C Type: 2.80mm



Standard	UL	CE
Rated Voltage	250V	300V
Rated Current	12A	20A
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	5.08/7.62/10.16mm	
Poles	2P, 3P---25P	
Housing	PC, UL94V-0	
Solder Pins	Brass, Tin Plated	

RoHS Compliant			
APPD.		TOLERANCE 0 ± .00 ± ANG. ±	PART NAME Fuse Terminal Block
DWG. BRAUN	SCALE UNIT M M	SIZE. A 4	PART NO. SM C09 77624 XX RY
DATE 2013/05/14	PAGE 1 OF 1	REV. A	

1 2 3 4 5 6 7 8