




1 2 3 4 5 6 7 8



A
B
C
D
E
F
G
H

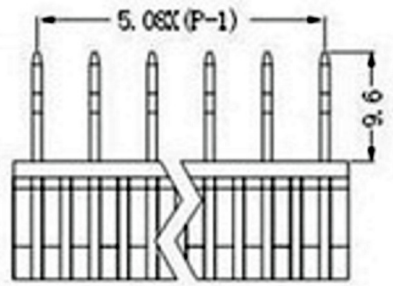

A Type: 6.3mm

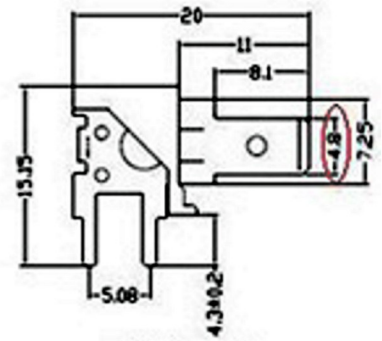

B Type: 4.8mm

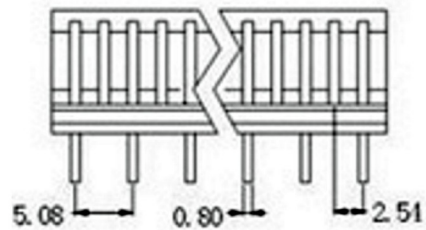

C Type: 2.80mm



Standard	UL	CE
Rated Voltage	250V	300V
Rated Current	12A	20A
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	5.08/7.62/10.16mm	
Poles	2P, 3P---25P	
Housing	PC, UL94V-0	
Solder Pins	Brass, Tin Plated	

RoHS
Compliant

SCHMID-M

APPD.		TOLERANCE	PART NAME
DWG.		0 ± .00 ± ANG. ±	
BRAUN	UNIT	SIZE.	PART NO.
DATE	M M	A 4	
2013/05/14	PAGE	REV.	SM C09 71024 XX RY
	1 OF 1	A	

1 2 3 4 5 6 7 8