
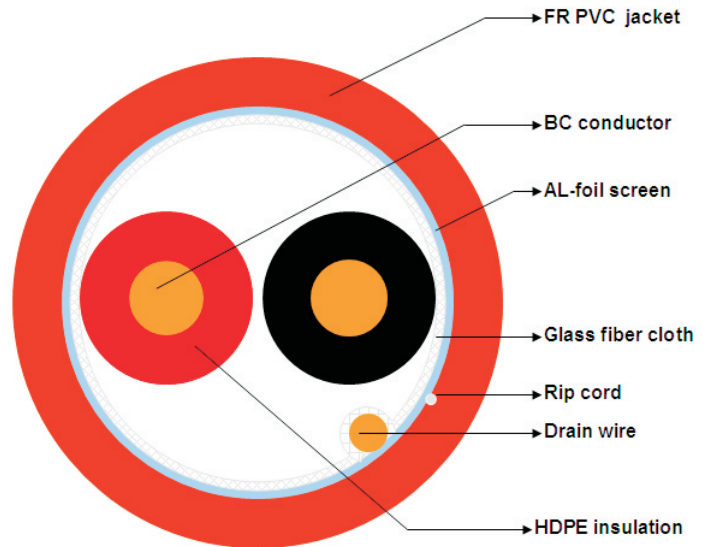


SM CAB 03 GF 02 SHIELDED GLASS FIBER FIRE ALARM

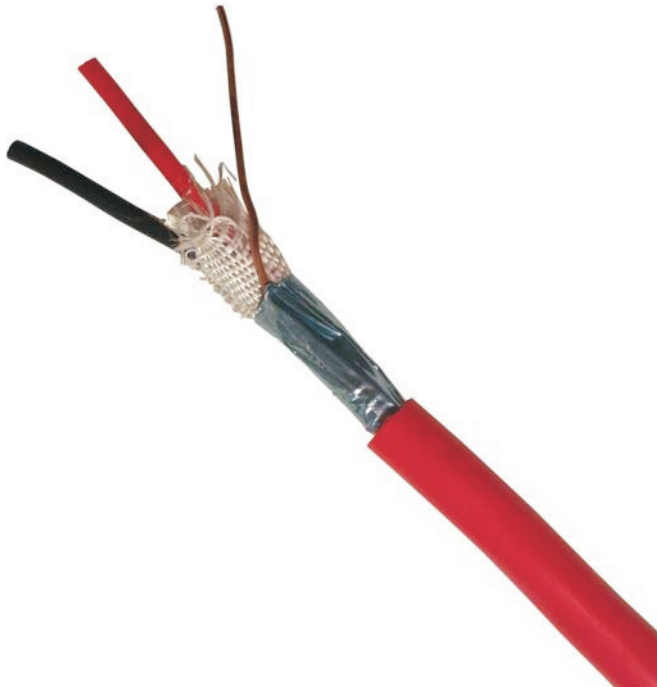

CONSTRUCTION

CONSTRUCTION

CONDUCTOR	Solid bare copper Conductor Dia.: $1.30 \pm 0.003\text{mm}$
INSULATION	Raw material of the Insulation: FR PVC Black / Red Insulation Dia. : $2.80 \pm 0.05\text{mm}$ Average thickness: 0.75mm Minimum point thickness: 0.7mm
SEPARATOR	Glass fiber cloth
DRAIN WIRE	O.D. 1.0mm Solid bare copper
SHIELDING	AL Foil
RIP CORD	Nylon thread
JACKET	Jacket material: FR PVC Color: Red Nominal Dia.: $8.5 \pm 0.2\text{mm}$ Average thickness: 1.2mm Minimum point thickness: 1.1mm
CABLE MARKING	As per customers request (OEM)