


SM CAB 03 FTP 08 ALARM SHIELDED

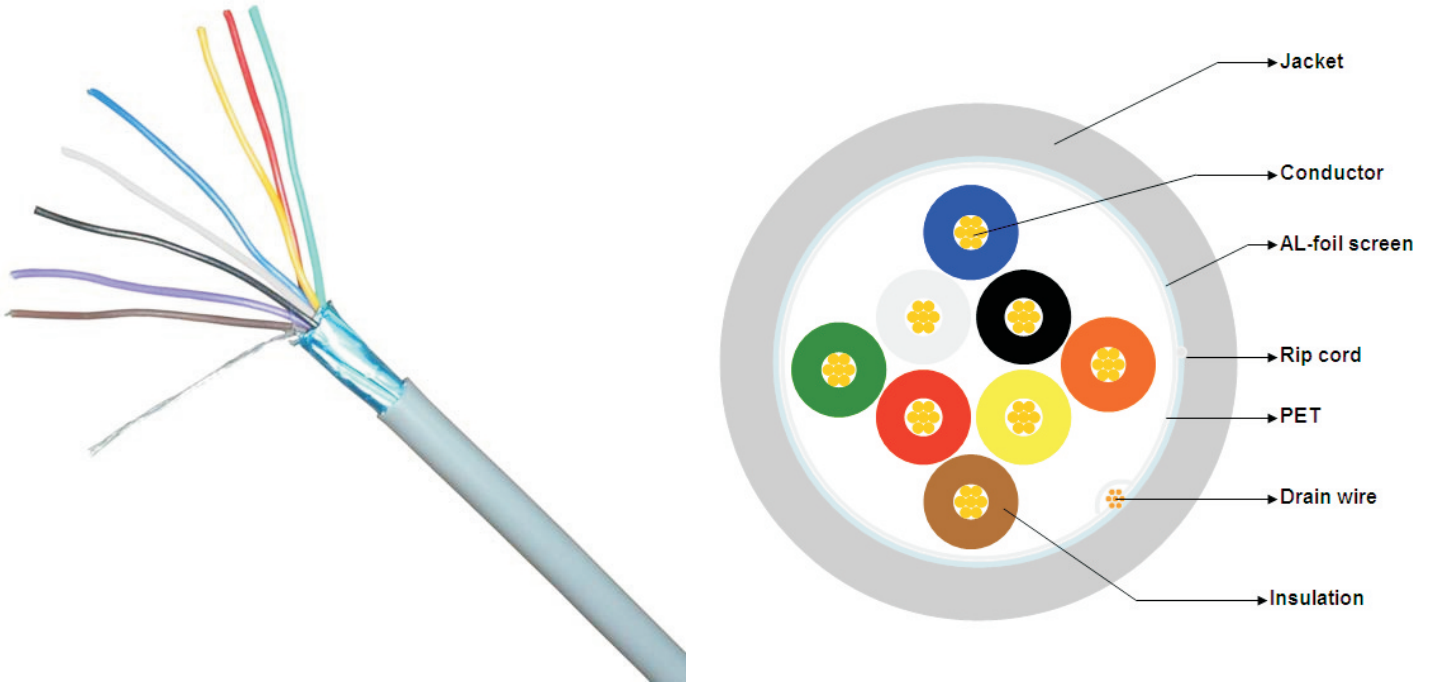

CONSTRUCTION

CONSTRUCTION

CONDUCTOR	Stranded copper or CCA
	Conductor Dia.: 7/0.2mm
INSULATION	Raw material of the Insulation: PVC
	Black / Red / Green / Yellow / White / Blue / Brown / Purple
	Insulation Dia. : 1.25 ± 0.05mm
	Average thickness: 0.35mm Minimum point thickness: 0.325mm
SEPARATOR	PET
DRAIN WIRE	7/0.2mm Stranded copper or CCA
SHIELDING	AL Foil
RIP CORD	Nylon thread
JACKET	Jacket material: PVC
	Color: White
	Nominal Dia.: 5.6 ± 0.2mm
	Average thickness: 0.5mm Minimum point thickness: 0.4mm
CABLE MARKING	As per customers request (OEM)