


SM CAB 04 UTP 04 Alarm unshielded

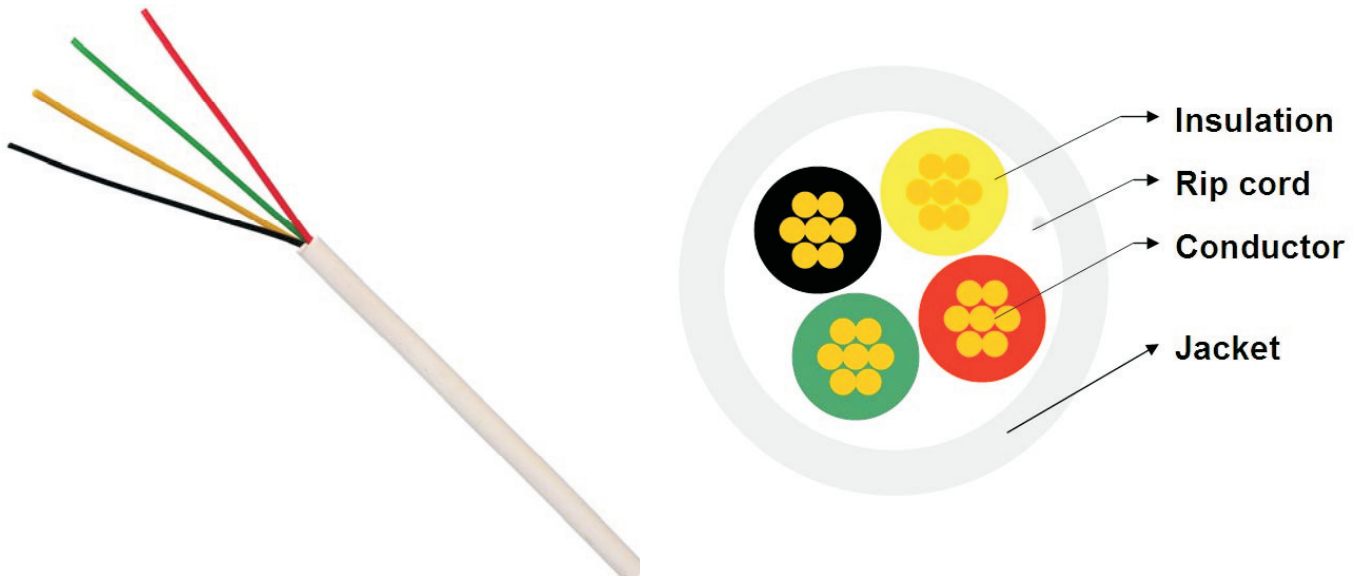

CONSTRUCTION

CONSTRUCTION

CONDUCTOR	Solid bare copper or CCA
	Conductor Dia.: 7/0.2mm
INSULATION	Raw material of the Insulation: PVC
	Color: Black / Red / Yellow / Green
	Insulation Dia. : 1.25 ± 0.05mm
	Average thickness: 0.35mm Minimum point thickness: 0.325mm
RIP CORD	Nylon thread
JACKET	Jacket material: PVC
	Color: White
	Nominal Dia.: 4.2 ± 0.2mm
	Average thickness: 0.5mm Minimum point thickness: 0.4mm
CABLE MARKING	As per customers request (OEM)