
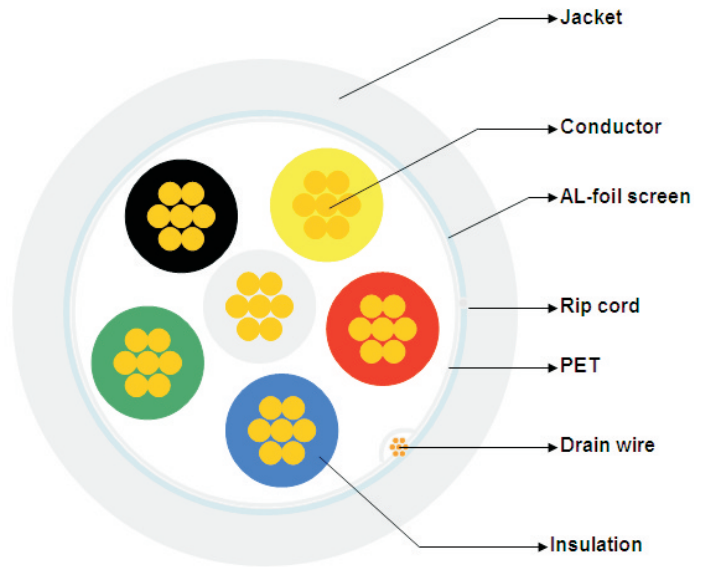


SM CAB 06 FTP 06 Shielded alarm cable

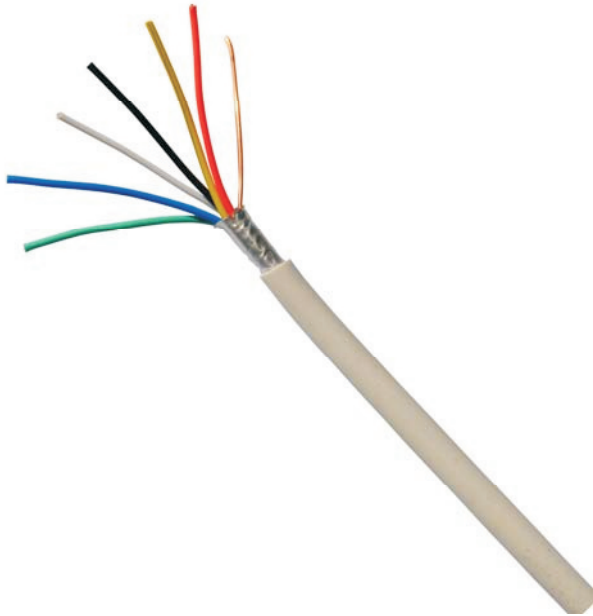

## CONSTRUCTION

## CONSTRUCTION

<b>CONDUCTOR</b>	Stranded copper or CCA Conductor Dia.: 7/0.2mm
<b>INSULATION</b>	Raw material of the Insulation: PVC Black / Red / Green / Yellow / Blue / White Insulation Dia. : 1.25 ± 0.05mm Average thickness: 0.35mm Minimum point thickness: 0.325mm
<b>SEPARATOR</b>	PET
<b>DRAIN WIRE</b>	7/0.2mm Stranded copper or CCA
<b>SHIELDING</b>	AL Foil
<b>RIP CORD</b>	Nylon thread
<b>JACKET</b>	Jacket material: PVC Color: White Nominal Dia.: 5.0 ± 0.2mm Average thickness: 0.5mm Minimum point thickness: 0.4mm
<b>CABLE MARKING</b>	As per customers request ( <b>OEM</b> )