
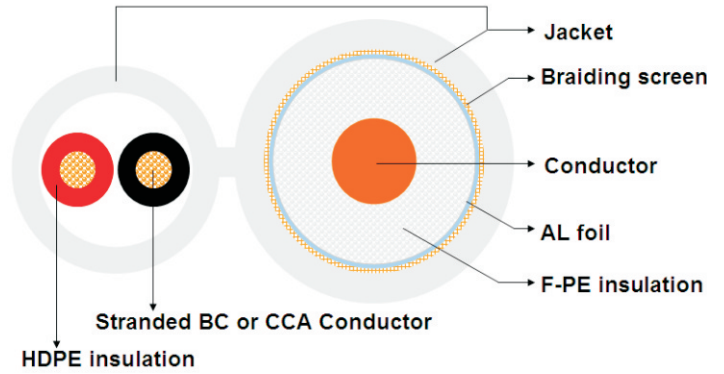


SM CAB 09 RG59 with power code Coaxial cable RG59 with power code

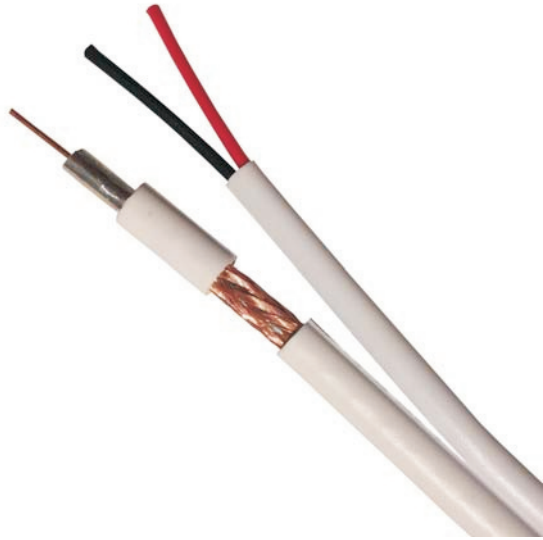

CONSTRUCTION

CONDUCTOR	Solid bare copper or CCS Conductor Dia.: 0.81 ± 0.003mm
INSULATION	Raw material of the Insulation: F-PE Insulation Dia. : 3.6 ± 0.1mm Average thickness: 1.4mm Minimum point thickness: 1.395mm
SHIELDING	AL Foil
BRAIDING	112/0.12mm CCA
JACKET	Jacket material: PVC Color: As per customer's request Nominal Dia.: 6.0 ± 0.2mm Average thickness: 1.1mm Minimum point thickness: 1.0mm
POWER CODE	Conductor: 24/0.2mm stranded BC or CCA Insulation: O.D. 1.8mm HDPE Jacket: O.D. 5.2mm PVC
CABLE MARKING	As per customers request (OEM)