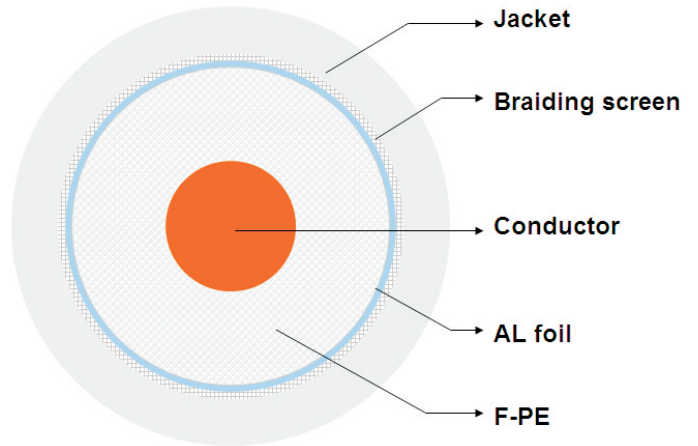
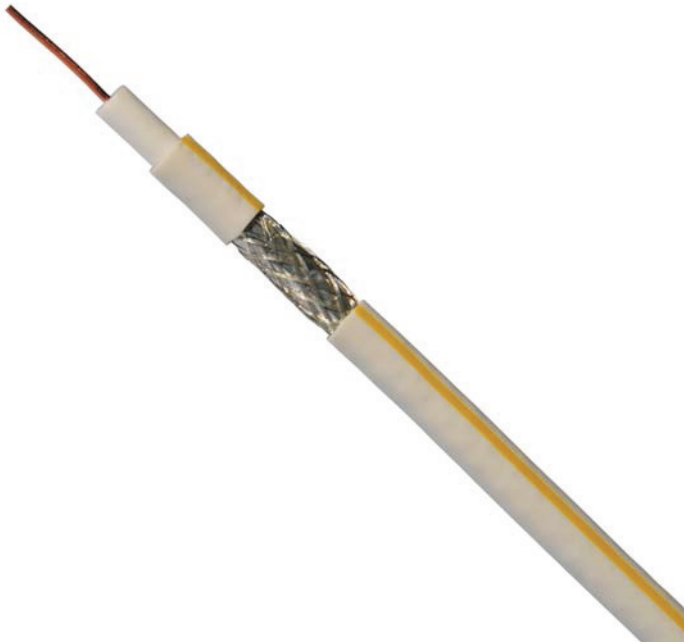


SM CAB 09 RG6 Coaxial cable RG6

**CONSTRUCTION****CONSTRUCTION**

<b>CONDUCTOR</b>	Solid bare copper or CCS
	Conductor Dia.: $1.02 \pm 0.003\text{mm}$
<b>INSULATION</b>	Raw material of the Insulation: F-PE
	Insulation Dia. : $4.6 \pm 0.1\text{mm}$
	Average thickness: 1.79mm
	Minimum point thickness: 1.785mm
<b>SHIELDING</b>	AL Foil
<b>BRAIDING</b>	80/0.12mm AL-MG
<b>JACKET</b>	Jacket material: PVC
	Color: As per customer's request
	Nominal Dia.: $6.8 \pm 0.2\text{mm}$
	Average thickness: 1.1mm
	Minimum point thickness: 1.0mm
<b>CABLE MARKING</b>	As per customers request ( <b>OEM</b> )