


PCB B Type



PCB A Type

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	2A	7A
Wire range	22-16AWG	0.2-1.0 mm ²
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C ~ +105°C	
Strip length	11mm	
Pitch	2.50/5.00mm(.100'')	
Poles	1P-XXP	
Housing	PA66+5%GF.,UL94V-0	
Pin header	Brass, Tin plated	
Wire guard	Stainless steel	

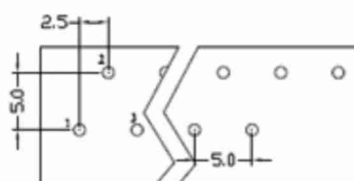

XX..... Nr. Pins
Y..... A (PCB Typ A); B (PCB Typ B)

RoHS Compliant		SCHMID-M	
APPD.	 SCALE	TOLERANCE	PART NAME
DWG.		.0 ± .00 ± ANG. ±	
DATE	UNIT	SIZE.	PART NO.
2014/01/27	M M	A 4	
	PAGE	REV.	
	1 OF 1	A	SM C09 3252C XX SC1Y