


Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	15A
Wire range	22-16AWG	0.2-1.0mm ²
Withstanding voltage	AC2000V/1Min	
Ambient temperature	-40°C~+105°C	
Strip length	10mm	
Pitch	5.08 / 7.62mm(.100")	
Poles	1P-XXP	
Housing	PA66+5%GF.,UL94V-0	
Pin header	Brass, Tin plated	
Wire guard	Stainless steel	

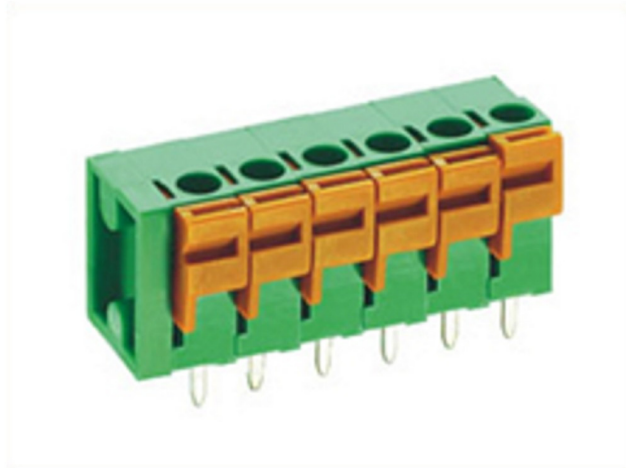

RoHS
Compliant

SCHMID-M

APPD.		TOLERANCE	PART NAME Terminal Block, Spring Style, hor. conductor, Pitch 7,62mm, PCB Straight, XX..... Nr. Pins
DWG.		SCALE	
DATE	UNIT	SIZE.	PART NO. SM C09 3764 XX SC4
2014/01/27	M M	A 4	
	PAGE	REV.	
	1 OF 1	A	