





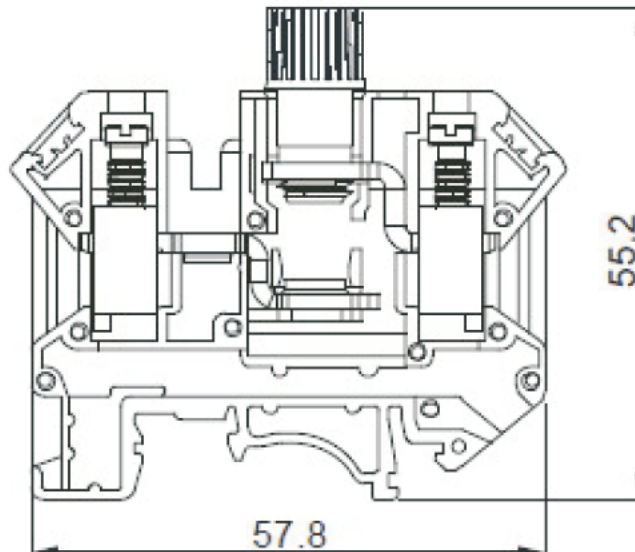





Rated current	10A	10A
Wire Size	20-6AWG	0.5-16mm <sup>2</sup>
T/W/End plate	12/62/-mm	
Height (NS35:7.5/NS35:15/NS32)	59/66.5/64mm	
Rated surge voltage/Contamination class	4KV/3	
Stripping length	11mm	
Screw thread/Tightening torque	M4/1.2N.m/10.5Lb-in	
Internal cylindrical gage	B6	
Insulating material/Inflammability class	PAV-0	
<b>Specification</b>	<b>Model</b>	<b>Pieces</b>
Fixed bridge 	SM C09 FBI 10-12	10
Insertion bridge 	SM C09 EB 10-12	10
Test plug socket insulated 	SM C09 DSB 4/7-6	100
Test plug socket insulated 	SM C09 DSBJ 4/15/6	
Zack strip 	SM C09 ZBB	



RoHS Compliant		<b>SCHMID-M</b>	
APPD.	 SCALE	TOLERANCE	PART NAME
DWG.		X.XX± 0.25 X.X±0.35 ANG. ±	SM C09 UK10-DR Series Screw
DATE	UNIT	SIZE	PART NO.
2013/10	MM	A4	
	PAGE	REV	
	1 OF 1	C	