


MATERIAL : BODY-BRASS
 CONTACT-BRASS
 SLEEVE-BRASS
 INSULATOR-TEFLON
 NUT-BRASS
 RING-BRASS
 SHELL-BRASS
 SI RUBBER-SILICONE
 C WASHER-BRASS

FINISH : BODY-NICKEL PLATING
 SLEEVE-NICKEL PLATING
 NUT-NICKEL PLATING
 RING-NICKEL PLATING
 SHELL-NICKEL PLATING
 CONTACT-GOLD PLATING OVER NICKEL

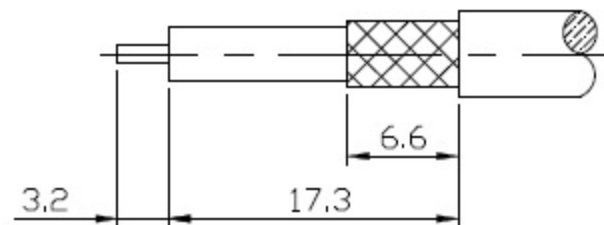

IMPEDANCE:50 OHM
 FREQUENCY RANGE:0 TO 11 GHZ
 VSWR:1.3 MAX
 VOLTAGE RATING:1,500 VOLTS RMS MAX
 INSULATION RESISTANCE:5,000 MEGOHMS MIN

DIMENSIONS ARE IN MILLIMETERS		TOLERANCE		SCHMID-M	
· × ±0.5	ANGLE ±3°	SCALE	3:1	TITLE N MALE STRAIGHT CRIMP FOR RG 174u	
· × × ±0.1		REV	A-0	316u	
· × × × ±0.05		DRAWN	DATE 90.08.15	DRAWING NO N-1106-TGN	
		APPROVAL	DATE	FILE NO	