

m12 Receptacle

M12 (Metal Die-Casting) 90° Receptacle, Female, A, B & D-Coding


Description

Receptacle 90°, Front Fastened,
Screw Type, PCB, Shielded

Figure



Drawing



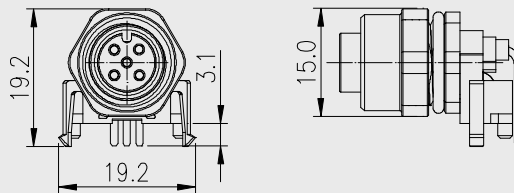


Coding

A-Coding (X=1)

B-Coding (X=2)

D-Coding (X=4)



Part No.

Contacts

Part Number

Contacts

Part Number

A, B, D-Coding

3

84036X05-24

4

84046X05-24

5

84056X05-24

A-Coding

8

84086105-24

Specifications

Number of Contacts	3	4	5	8
Voltage Rating	250V	250V	60V	30V
Rated Current (40°C)	4A	4A	4A	2A
Max Panel Thickness	2.0mm (max)			
Environmental Protection	IP67			
Mechanical Life	100 mating cycles (min)			
Operating Temperature	-40°C - 105°C			