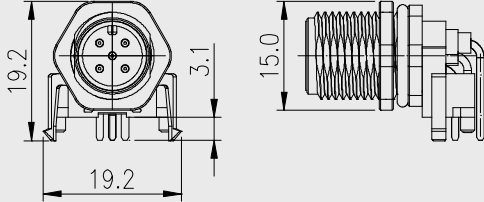





m12 Receptacle

M12 (Plastic) 90° Receptacle, Male, A, B & D-Coding

Description	Receptacle 90°, Front Fastened, Screw Type, PCB, Plastic
Figure	

Drawing	
---------	--

Coding	A-Coding (X=1)	B-Coding (X=2)	D-Coding (X=4)
			

Part No.	A-Coding (X=1)		B-Coding (X=2)		D-Coding (X=4)	
	Contacts	Part Number	Contacts	Part Number	Contacts	Part Number
A, B, D-Coding	3	56035X05-24	4	56045X05-24		
	5	56055X05-24				
A-Coding	8	56085105-24				

Specifications					
Number of Contacts	3	4	5	8	
Voltage Rating	250V	250V	60V	30V	
Rated Current (40°C)	4A	4A	4A	2A	
Max Panel Thickness	3mm (max)				
Environmental Protection	IP67				
Mechanical Life	100 mating cycles (min)				
Operating Temperature	-40°C - 105°C				

About CHOGORI
 Industrial Automation
 To Order
 M8 Series
 M12 Series
 USB Series
 RJ45 Series
 D-SUB Series