


MINI AUTO PLUG-IN FUSES



SM FUSE APF-190

Electrical Characteristics:

RATING	BLOWING TIME
110%	4hours Min
135%	0.75 to 1800s
200%	0.15 to 5s
350%	80ms to 300ms

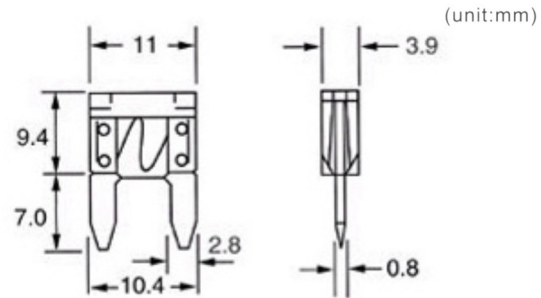

RATING

Type	Ampere Rating	Color
SM-FUSE-APF-190-2	2	grey
SM-FUSE-APF-190-3	3	violet
SM-FUSE-APF-190-4	4	pink
SM-FUSE-APF-190-5	5	orange
SM-FUSE-APF-190-7.5	7.5	brown
SM-FUSE-APF-190-10	10	red
SM-FUSE-APF-190-15	15	blue
SM-FUSE-APF-190-20	20	yellow
SM-FUSE-APF-190-25	25	clear
SM-FUSE-APF-190-30	30	green
SM-FUSE-APF-190-35	35	purple


MINI AUTO PLUG-IN FUSES (WITH INDICATING LAMP)



SM FUSE APF.L-190

Electrical Characteristics:

RATING	BLOWING TIME
110%	4hours Min
135%	0.75 to 1800s
200%	0.15 to 5s
350%	80ms to 300ms

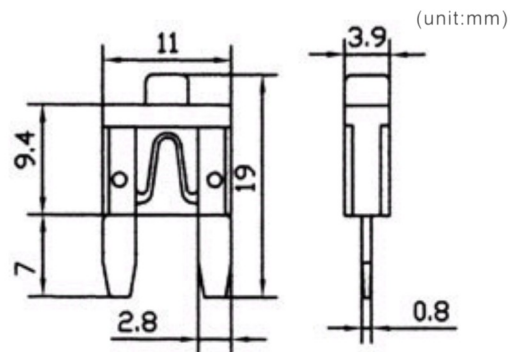

RATING

Type	Ampere Rating	Color
SM-FUSE-APF.L-190-2	2	grey
SM-FUSE-APF.L-190-3	3	violet
SM-FUSE-APF.L-190-4	4	pink
SM-FUSE-APF.L-190-5	5	orange
SM-FUSE-APF.L-190-7.5	7.5	brown
SM-FUSE-APF.L-190-10	10	red
SM-FUSE-APF.L-190-15	15	blue
SM-FUSE-APF.L-190-20	20	yellow
SM-FUSE-APF.L-190-25	25	clear
SM-FUSE-APF.L-190-30	30	green
SM-FUSE-APF.L-190-35	35	purple