


## AUTO PLUG-IN FUSES


### SM FUSE APF-191



SM FUSE APF-191A SM FUSE APF-191G

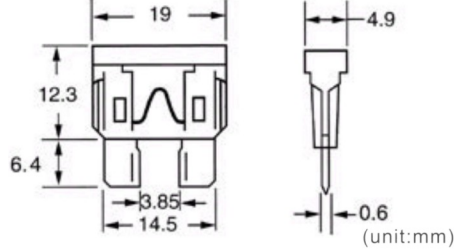

SM FUSE APF-191N

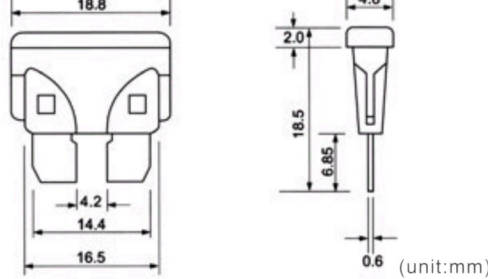

### RATING

Type	Ampere Rating	Color
SM-Fuse-APF-191-2	2	grey
SM-Fuse-APF-191-3	3	violet
SM-Fuse-APF-191-4	4	pink
SM-Fuse-APF-191-5	5	orange
SM-Fuse-APF-191-7.5	7.5	brown
SM-Fuse-APF-191-10	10	red
SM-Fuse-APF-191-15	15	blue
SM-Fuse-APF-191-20	20	yellow
SM-Fuse-APF-191-25	25	clear
SM-Fuse-APF-191-30	30	green
SM-Fuse-APF-191-35	35	purple
SM-Fuse-APF-191-40	40	dark orange

### Electrical Characteristics:

RATING	BLOWING TIME
110%	4hours Min
135%	0.75 to 1800s
200%	0.15 to 5s
350%	80ms to 250ms

## AUTO PLUG-IN FUSES (WITH INDICATING LAMP)

### SM FUSE APF.L-192




### Electrical Characteristics:

RATING	BLOWING TIME
110%	4hours Min
135%	0.75 to 1800s
200%	0.15 to 5s
350%	80ms to 250ms

Ampere Voltage: 12V

(unit:mm)

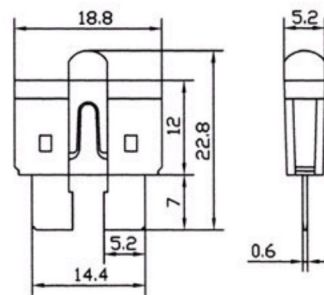

### RATING

Type	Ampere Rating	Color
SM-FUSE-APF.L-192-2	2	grey
SM-FUSE-APF.L-192-3	3	violet
SM-FUSE-APF.L-192-4	4	pink
SM-FUSE-APF.L-192-5	5	orange
SM-FUSE-APF.L-192-7.5	7.5	brown
SM-FUSE-APF.L-192-10	10	red
SM-FUSE-APF.L-192-15	15	blue
SM-FUSE-APF.L-192-20	20	yellow
SM-FUSE-APF.L-192-25	25	clear
SM-FUSE-APF.L-192-30	30	green
SM-FUSE-APF.L-192-35	35	purple
SM-FUSE-APF.L-192-40	40	dark orange