
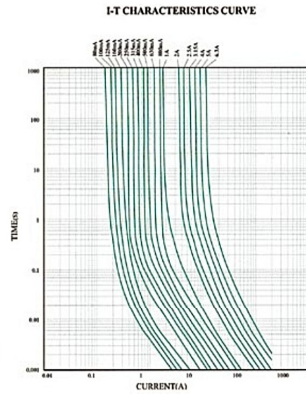




FUSES

Ø 5.2x20 Glass Tube Fuses

GLASS TUBE FUSE(FAST-BLOW)

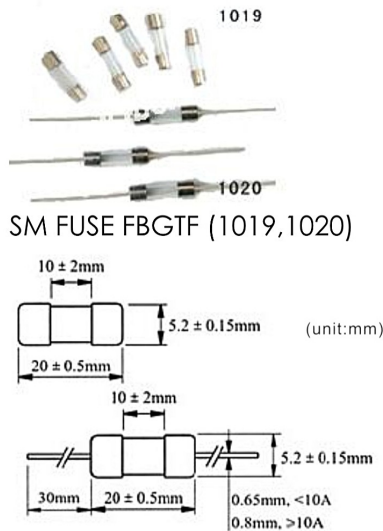

GLASS TUBE FUSE(FAST-BLOW)

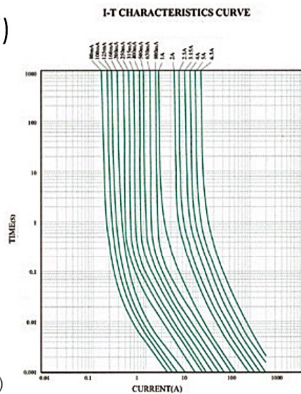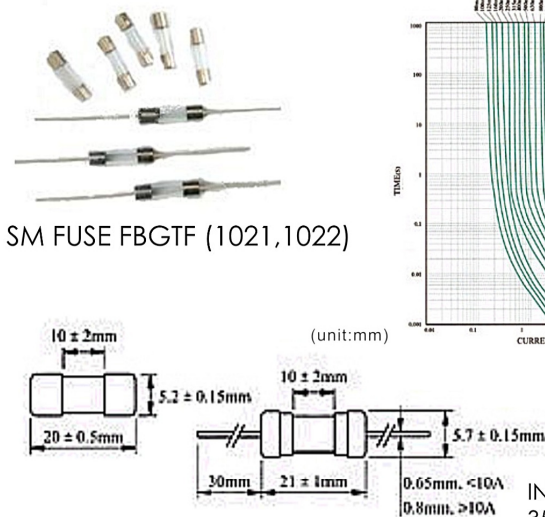

INTERRUPTING RATING:
35A OR 10In WHICHEVER IS GREATER
CCC/VDE/SEMKO

Electrical Characteristics:

RATING		2.1 In		2.75 In		4 In		10 In
		Max	Min	Max	Min	Max	Max	
Blowing Time	? 32 mA ~ 100mA	30 min	10ms	500ms	3ms	100ms	20ms	
	? 100mA ~ 6.3 A	30 min	50ms	2s	10ms	300ms	20ms	

CODINNG KEY:

SM FUSE FBMF1019-Y-F(fast) or S(slow)

SM FUSE FBMF1020-Y-F(fast) or S(slow)

SM FUSE FBMF1021-Y-F(fast) or S(slow)

SM FUSE FBMF1022-Y-F(fast) or S(slow)

Y=Ampere Rating (I=100mA)

Y	Ampere Rating	mv Voltage Drop	Voltage Rating	Disjunction Power
1	100mA	3500	H/L	H/L
2	125mA	2100	H/L	H/L
3	150mA	2100	H/L	H/L
4	160mA	2000	H/L	H/L
5	200mA	1700	H/L	H/L
6	250mA	1300	H/L	H/L
7	300mA	1300	H/L	H/L
8	315mA	1300	H/L	H/L
9	350mA	1300	H/L	H/L
10	400mA	1200	H/L	H/L
11	500mA	650	H/L	H/L
12	600mA	650	H/L	H/L
13	700mA	600	H/L	H/L
14	750mA	240	H/L	H/L
15	800mA	200	H/L	H/L
16	1A	200	H/L	H/L
17	1.2A	200	H/L	H/L
18	1.25A	200	H/L	H/L
19	1.5A	200	H/L	H/L
20	1.6A	190	H/L	H/L
21	1.8A	190	H/L	H/L
22	2A	170	H/L	H/L
23	2.5A	170	H/L	H/L
24	3A	150	H/L	H/L
25	3.15A	150	H/L	H/L
26	3.5A	150	H/L	H/L
27	4A	130	H/L	H/L
28	5A	130	H/L	H/L
29	6A	130	H/L	H/L
30	6.3A	130	H/L	H/L
31	7A	120	H/L	H/L
32	8A	100	H/L	H/L
33	10A	100	H/L	H/L
34	12A	100	H/L	H/L
35	15A	100	H/L	H/L

Ampere Voltage:
H Denotes For 250V
L Denotes For 125V

Disjunction Power:
H Denotes For High Disjunction
L Denotes For Low Disjunction