


FUSES


Ø 5.2x20 Glass Tube Fuses

GLASS TUBE FUSE(MEDIUM SLOW-BLOW)



SM FUSE FBGTF (1027,1028)

I-T CHARACTERISTICS CURVE

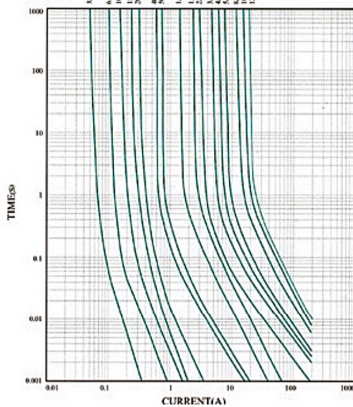

Electrical Characteristics:

RATING	BLOWING TIME
130%	1 hour Min
160%	1 hour Max
200%	120 sec Max

INTERRUPTING RATING:

500 amperes at 125V AC (1A-15A)
100 amperes at 250V AC (1A-15A)
T-MARK

CODINNG KEY:

SM FUSE FBMF1027-Y-F(fast) or S(slow)

SM FUSE FBMF1028-Y-F(fast) or S(slow)

SM FUSE FBMF1029-Y-F(fast) or S(slow)

SM FUSE FBMF1030-Y-F(fast) or S(slow)

Y=Ampere Rating (1=100mA)

Y	Ampere Rating	Voltage Rating	Disjunction Power
1	100mA	H/L	H/L
2	125mA	H/L	H/L
3	150mA	H/L	H/L
4	160mA	H/L	H/L
5	200mA	H/L	H/L
6	250mA	H/L	H/L
7	300mA	H/L	H/L
8	315mA	H/L	H/L
9	350mA	H/L	H/L
10	400mA	H/L	H/L
11	500mA	H/L	H/L
12	600mA	H/L	H/L
13	700mA	H/L	H/L
14	750mA	H/L	H/L
15	800mA	H/L	H/L
16	1A	H/L	H/L
17	1.2A	H/L	H/L
18	1.25A	H/L	H/L
19	1.5A	H/L	H/L
20	1.6A	H/L	H/L
21	1.8A	H/L	H/L
22	2A	H/L	H/L
23	2.5A	H/L	H/L
24	3A	H/L	H/L
25	3.15A	H/L	H/L
26	3.5A	H/L	H/L
27	4A	H/L	H/L
28	5A	H/L	H/L
29	6A	H/L	H/L
30	6.3A	H/L	H/L
31	7A	H/L	H/L
32	8A	H/L	H/L
33	10A	H/L	H/L
34	12A	H/L	H/L
35	15A	H/L	H/L

GLASS TUBE FUSE(MEDIUM FAST-BLOW)





Electrical Characteristics:

RATING	BLOWING TIME
130%	1 hour Min
160%	1 hour Max
200%	120 sec Max

I-T CHARACTERISTICS CURVE

SM FUSE FBGTF (1029,1030)

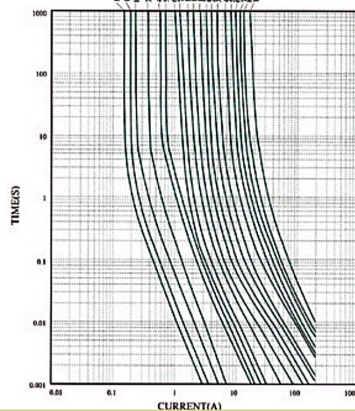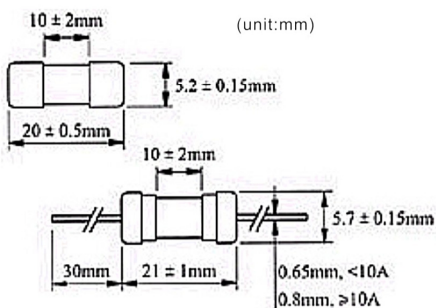

Ampere Voltage:
H Denotes For 250V
L Denotes For 125V

Disjunction Power:
H Denotes For High Disjunction
L Denotes For Low Disjunction