


FUSES

Ø 5.2x20 Ceramic Tube Fuse

CERAMIC TUBE FUSE(FAST-BLOW)




FBCTF(1039,1040)
I-T CHARACTERISTICS CURVE

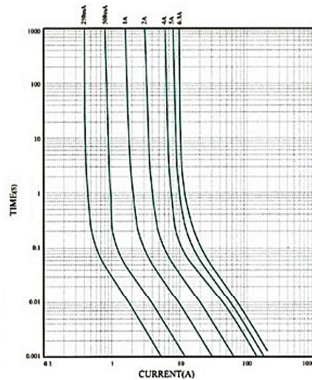

Electrical Characteristics:

RATING	2.1 In		2.75 In		4 In		10 In	
	Max	Min	Max	Min	Max	Min	Max	
Blowing Time	100mA ~ 10A	30 min	10ms	3s	3ms	300ms	20ms	

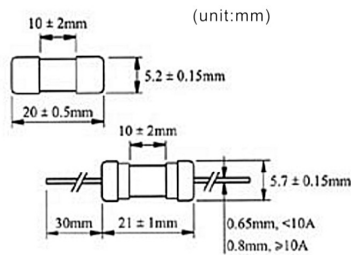

CODINNG KEY:

SM FUSE FBMF1039-Y-F(fast) or S(slow)
SM FUSE FBMF1040-Y-F(fast) or S(slow)
SM FUSE FBMF1041-Y-F(fast) or S(slow)
SM FUSE FBMF1042-Y-F(fast) or S(slow)
 Y=Ampere Rating (I=100mA)

Y	Ampere Rating	Voltage Rating	Disjunction Power
1	100mA	H/L	H/L
2	125mA	H/L	H/L
3	150mA	H/L	H/L
4	160mA	H/L	H/L
5	200mA	H/L	H/L
6	250mA	H/L	H/L
7	300mA	H/L	H/L
8	315mA	H/L	H/L
9	350mA	H/L	H/L
10	400mA	H/L	H/L
11	500mA	H/L	H/L
12	600mA	H/L	H/L
13	700mA	H/L	H/L
14	750mA	H/L	H/L
15	800mA	H/L	H/L
16	1A	H/L	H/L
17	1.2A	H/L	H/L
18	1.25A	H/L	H/L
19	1.5A	H/L	H/L
20	1.6A	H/L	H/L
21	1.8A	H/L	H/L
22	2A	H/L	H/L
23	2.5A	H/L	H/L
24	3A	H/L	H/L
25	3.15A	H/L	H/L
26	3.5A	H/L	H/L
27	4A	H/L	H/L
28	5A	H/L	H/L
29	6A	H/L	H/L
30	6.3A	H/L	H/L
31	7A	H/L	H/L
32	8A	H/L	H/L
33	10A	H/L	H/L
34	12A	H/L	H/L
35	15A	H/L	H/L
36	20A	H/L	H/L
37	25A	H/L	H/L
38	30A	H/L	H/L



Ampere Voltage:
 H Denotes For 250V
 L Denotes For 125V

Disjunction Power:
 H Denotes For High Disjunction
 L Denotes For Low Disjunction

CERAMIC TUBE FUSE(SLOW-BLOW)



FBCTF(1041,1042)
I-T CHARACTERISTICS CURVE

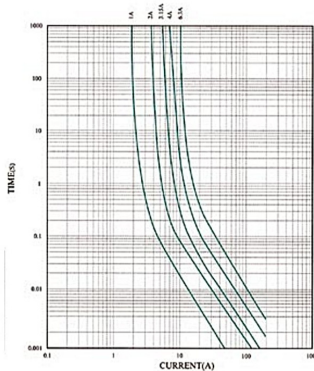

Electrical Characteristics:

RATING	2.1 In		2.75 In		4 In		10 In	
	Max	Min	Max	Min	Max	Min	Max	
Blowing Time	200 mA ~ 800mA	30 min	400ms, 80s	20ms	5s	5ms	100ms	
	1A ~ 3.5 A	30 min	1s, 80s	95ms	5s	10ms	100ms	
	3.15A ~ 6.3A	30min	1s, 80s	150ms	5s	20ms	100ms	
	8A ~ 15A	30min	1s, 80s	150ms	5s	20ms	120ms	

INTERRUPTING RATING:
 1,500 amperes at 250V
 AC (100mA-30A)