



FUSES

Ø 6.35x30, Ø 6.35x32 Ceramic Tube Fuses

CERAMIC TUBE FUSE (FAST-BLOW¹)

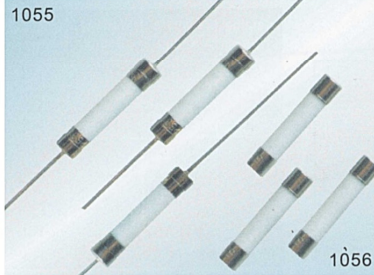


SM FUSE FBCTF(1055,1056)

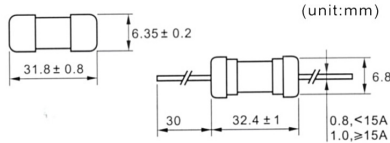

Electrical Characteristics:

RATING	BLOWING TIME
100%	4 hour Min
135%	1 hour Max
200%	2min Max

I-T CHARACTERISTICS CURVE

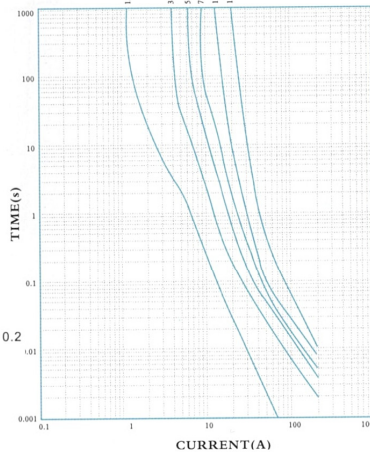

CODING KEY:

SM FUSE FBMF1055-Y-F(fast) or S(slow)

SM FUSE FBMF1056-Y-F(fast) or S(slow)


SM FUSE FBMF1057-Y-F(fast) or S(slow)

SM FUSE FBMF1058-Y-F(fast) or S(slow)


Y=Ampere Rating (I=100mA)

Y	Ampere Rating	Voltage Rating	Disjunction Power
1	100mA	H/L	H/L
2	125mA	H/L	H/L
3	150mA	H/L	H/L
4	160mA	H/L	H/L
5	200mA	H/L	H/L
6	250mA	H/L	H/L
7	300mA	H/L	H/L
8	315mA	H/L	H/L
9	350mA	H/L	H/L
10	400mA	H/L	H/L
11	500mA	H/L	H/L
12	600mA	H/L	H/L
13	700mA	H/L	H/L
14	750mA	H/L	H/L
15	800mA	H/L	H/L
16	1A	H/L	H/L
17	1.2A	H/L	H/L
18	1.25A	H/L	H/L
19	1.5A	H/L	H/L
20	1.6A	H/L	H/L
21	1.8A	H/L	H/L
22	2A	H/L	H/L
23	2.5A	H/L	H/L
24	3A	H/L	H/L
25	3.15A	H/L	H/L
26	3.5A	H/L	H/L
27	4A	H/L	H/L
28	5A	H/L	H/L
29	6A	H/L	H/L
30	6.3A	H/L	H/L
31	7A	H/L	H/L
32	8A	H/L	H/L
33	10A	H/L	H/L
34	12A	H/L	H/L
35	15A	H/L	H/L

CERAMIC TUBE FUSE(SLOW-FUSE)

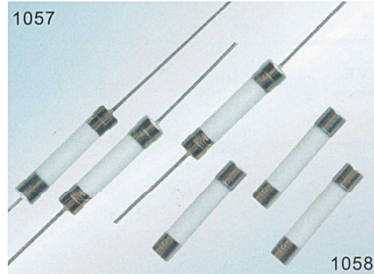

SM FUSE FBCTF(1057,1058)

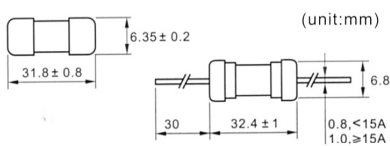

Electrical Characteristics:

RATING	BLOWING TIME
100%	4 hour Min
135%	1 hour Max
200%	5s-120s

INTERRUPTING RATING:

10,000 amperes at 125V AC (32mA-5A)

35 amperes at 250V AC (32mA-1A)


100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-5A)

500 amperes at 125V AC (1A-15A)MITI TYPE A

100 amperes at 250V AC (1A-15A)MITI TYPE A

I-T CHARACTERISTICS CURVE

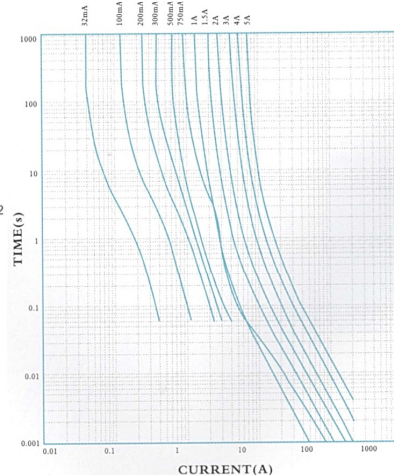

Ampere Voltage:
H Denotes For 250V
L Denotes For 125V

Disjunction Power:
H Denotes For High Disjunction
L Denotes For LoW Disjunction