



# FUSES

## Ø 6.35x35, Ø 6.35x45 Glass Tube Fuses

### GLASS TUBE FUSE (FAST-BLOW)

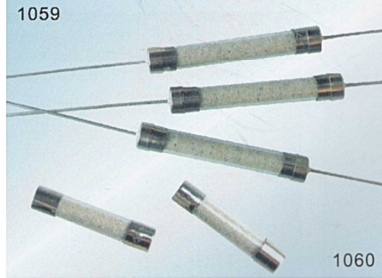


SM FUSE FBGTF(1059,1060)

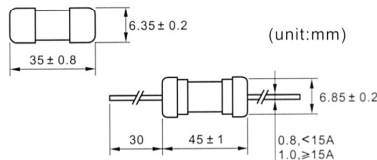

Electrical Characteristics:

RATING	2.1 In		2.75 In		4 In		10 In
	Max	Min	Max	Min	Max	Max	
Blowing	≥ 50 mA ~ 100mA	20s	20ms	200ms	1ms	30ms	5ms
Time	? 100mA ~ 10 A	20s	20ms	1800ms	10ms	600ms	120ms

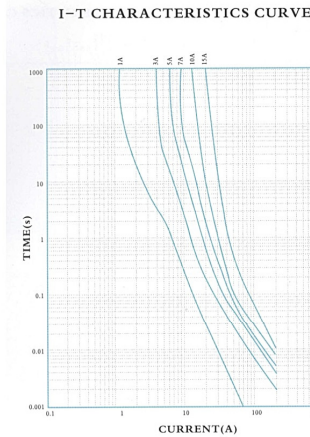

CODINNG KEY:

SM FUSE FBMF1059-Y-F(fast) or S(slow)

SM FUSE FBMF1060-Y-F(fast) or S(slow)


SM FUSE FBMF1061-Y-F(fast) or S(slow)

SM FUSE FBMF1062-Y-F(fast) or S(slow)


Y=Ampere Rating (I=100mA)

Y	Ampere Rating	Voltage Rating	Disjunction Power
1	100mA	H/L	H/L
2	125mA	H/L	H/L
3	150mA	H/L	H/L
4	160mA	H/L	H/L
5	200mA	H/L	H/L
6	250mA	H/L	H/L
7	300mA	H/L	H/L
8	315mA	H/L	H/L
9	350mA	H/L	H/L
10	400mA	H/L	H/L
11	500mA	H/L	H/L
12	600mA	H/L	H/L
13	700mA	H/L	H/L
14	750mA	H/L	H/L
15	800mA	H/L	H/L
16	1A	H/L	H/L
17	1.2A	H/L	H/L
18	1.25A	H/L	H/L
19	1.5A	H/L	H/L
20	1.6A	H/L	H/L
21	1.8A	H/L	H/L
22	2A	H/L	H/L
23	2.5A	H/L	H/L
24	3A	H/L	H/L
25	3.15A	H/L	H/L
26	3.5A	H/L	H/L
27	4A	H/L	H/L
28	5A	H/L	H/L
29	6A	H/L	H/L
30	6.3A	H/L	H/L
31	7A	H/L	H/L
32	8A	H/L	H/L
33	10A	H/L	H/L
34	12A	H/L	H/L
35	15A	H/L	H/L

### GLASS TUBE FUSE (SLOW-BLOW)

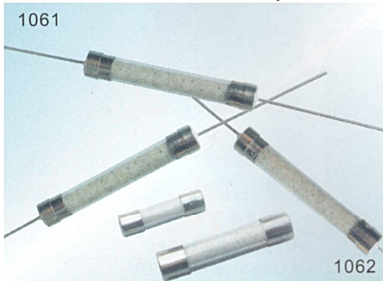

SM FUSE FBGTF(1061,1062)

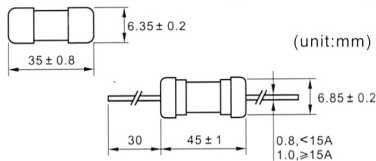


Electrical Characteristics:

RATING	BLOWING TIME
130%	4 hour Min
160%	1 hour Max
200%	120 sec Max

INTERRUPTING RATING:

1,500 amperes at 250V AC (100mA-30A)

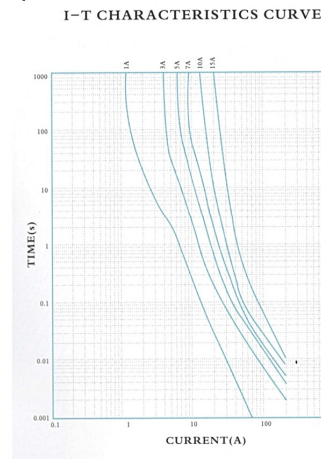

Ampere Voltage:

H Denotes For 250V

L Denotes For 125V

Disjunction Power:

H Denotes For High

Disjunction

L Denotes For LoW

Disjunction