



Description

R12.100 Series are the fuses set the industry standard for performance, reliability and quality. The solder-free design provides excellent on-off and temperature cycling characteristics during use and also makes our SMD fuses more heat and shock tolerant than typical subminiature fuses.

Features

- Rapid interruption of excessive current
- Compatible with reflow and wave solder
- Ceramic and glass construction
- One time positive disconnect
- Lead free and Halogen free material

Applications

- Secondary circuit protection
- Laptop, notebook, netbook
- Flat panel displays
- High definition television(HDTV)
- LCD/LED backlighting
- Computers and peripherals
- Gaming console systems
- Handheld/portable equipment
- Mobile device charges
- Automotive
- Central body control module
- Heating ventilation and air conditioning
- Doors,window lift and seat control
- Digital instrument cluster
- In-vehicle infotainment and navigation
- Electric pumps,motor control and
- Powertrain control module(PCU)/Engine
- Transimission Control Unit(TCU)

Electrical Characteristics

Rated Current	% of Amp Rating	Opening Time
250mA~30A	100%	4hours, min
1A~3A	200%	1.0s - 60 s
1A~5A	250%	5.0s max
1A~5A	300%	0.1s - 3.0 s
250mA~750mA	350%	5.0s max
6A~30A	350%	5.0s max
250mA~30A	1000%	0.2ms - 20.0 ms

Agency information


File Number:E340427, Guide JDYX2/JDYX8

Specifications


Part No.	Rated Voltage (V)	Rated Current (A)	Breaking Capacity (A)	Typical Cold Resistance (mOhms)	Typical Voltage Drop (mV)	Typical Pre-Arcing I ² t (A ² Sec)	Marking
R12.100.0.25	125Vdc 72Vdc 63Vdc 32Vdc/24Vdc	250mA	100A@72Vdc 100A@63Vdc 100A@32Vdc 300A@24Vdc	3700	1350	0.00038	.25
R12.100.0.375		375mA		1850	720	0.00077	E
R12.100.0.5		500mA		1050	690	0.0019	B
R12.100.0.75		750mA		775	680	0.15	G
R12.100.1		1A		485	550	0.2	H
R12.100.1.5		1.5A		218	355	0.45	K
R12.100.2		2A		133	310	1.2	N
R12.100.2.5		2.5A		79	230	1.9	O
R12.100.3		3A		49	185	2.4	P
R12.100.3.5		3.5A		37	175	2.8	R
R12.100.4		4A		33	160	3.3	S
R12.100.4.5		4.5A		28	150	4.5	X
R12.100.5		5A		22	135	7	T
R12.100.6		6A		15.5	140	14	F
R12.100.7		7A		11.5	120	19	J
R12.100.8	8A	8.0	100	20	V		
R12.100.10	10A	7.0	90	32	U		
R12.100.12	12A	5.9	85	47	W		
R12.100.15	15A	3.8	75	63	Y		
R12.100.20	20A	2.9	70	82	Q		
R12.100.25	25A	1.6	60	90	25		
R12.100.30	30A	1.3	60	100	30		

Dimensions

(Unit: mm/inch)

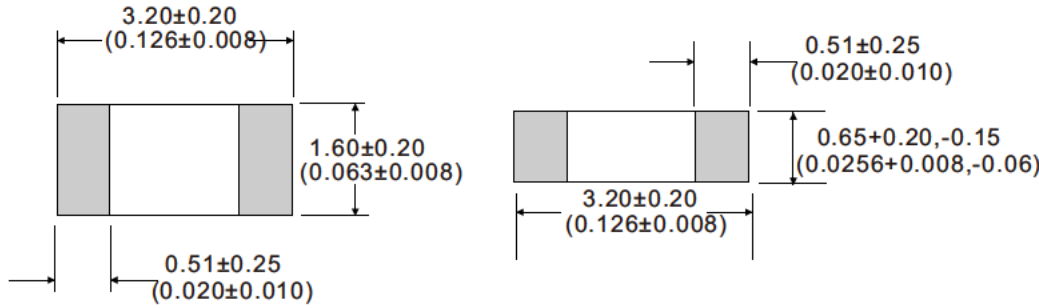


Pad layout

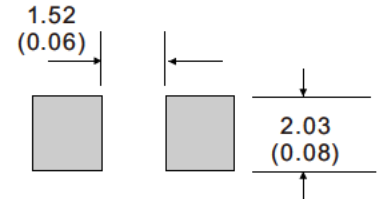

Installation Recommendations

1 Wave Soldering Parameters

Reflow Condition	Pb-free assembly	
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (Min to Max) (t_s)	60 120 seconds
Average Ramp-up Rate (Liquidus Temp (T_L) to peak)	3°C/second max.	
TS(max) to TL - Ramp-up Rate	5°C/second max.	
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 150 seconds
Peak Temperature (T_P)	260±0/-5°C	
Time within 5°C of actual peak Temperature (t_p)	30 seconds	
Ramp-down Rate	6°C/second max	
Time 25°C to peak Temperature (T_P)	8 minutes max.	
Do not exceed	260°C	

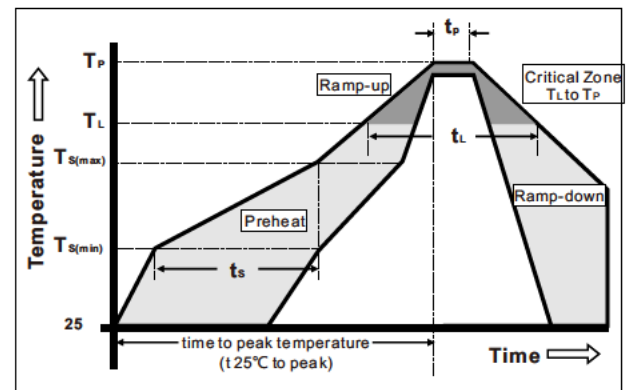

Solder Pot Temperature: 260°C max

Solder Dwell Time: 10 Seconds max


2 Hand-Solder Parameters

Solder Iron Temperature: 280±5°C

Heating Time: 5 Seconds min

Generally, hand-soldering is not recommended



Part Numbering System

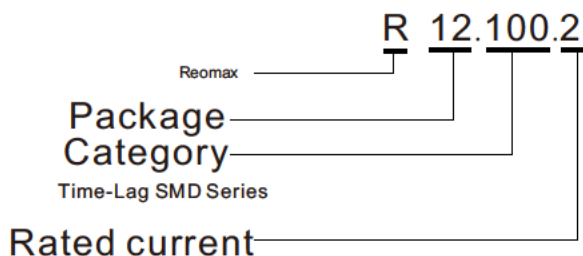

Product Characteristics


Materials	Body: Ceramic Terminations: Silver over-plated with tin Element: Alloy(Ag,Cu,Zn) Cover Coat: Glass
Operating Temperature	-55°C to 125°C Consult temperature derating curve chart.
Thermal Shock	300 cycles -55°C to 125°C
Humidity	MIL-STD-202F, Method 103B, Condition D
Vibration	Per MIL-STD-202F, Method 201A
Insulation Resistance (After Opening)	Greater than 10,000 ohms
Resistance to Soldering Heat	MIL-STD-202G, Method 210F, Condition D

Time Current Curve

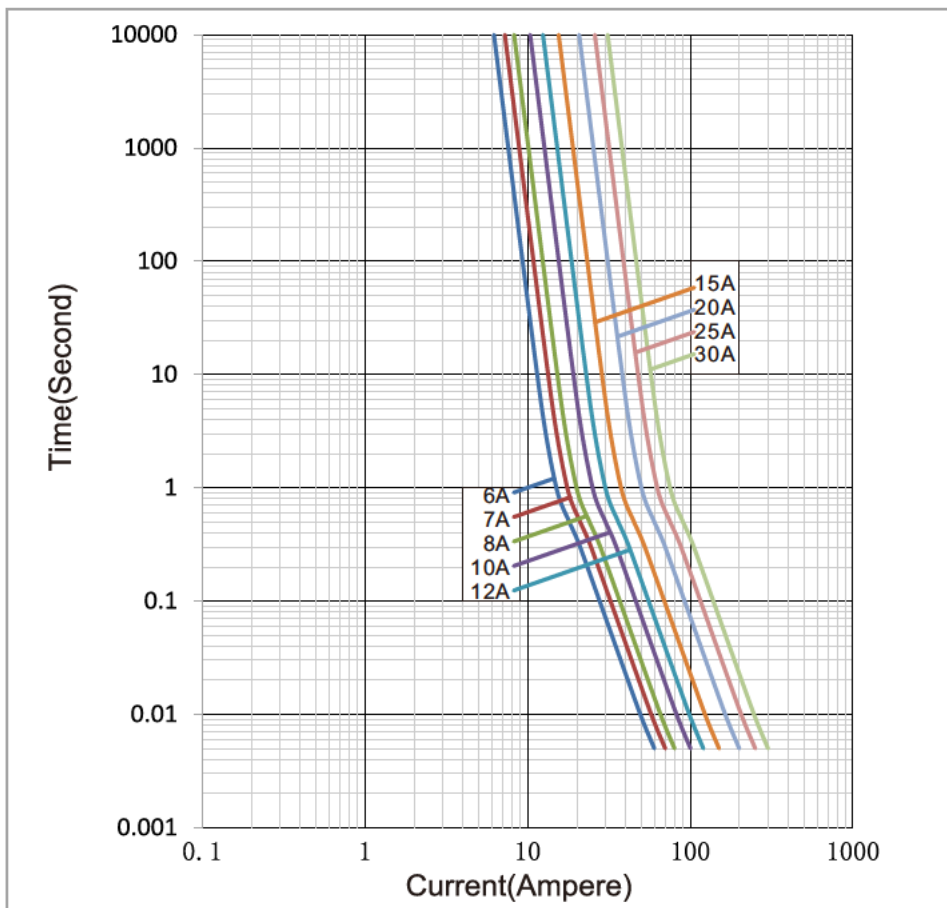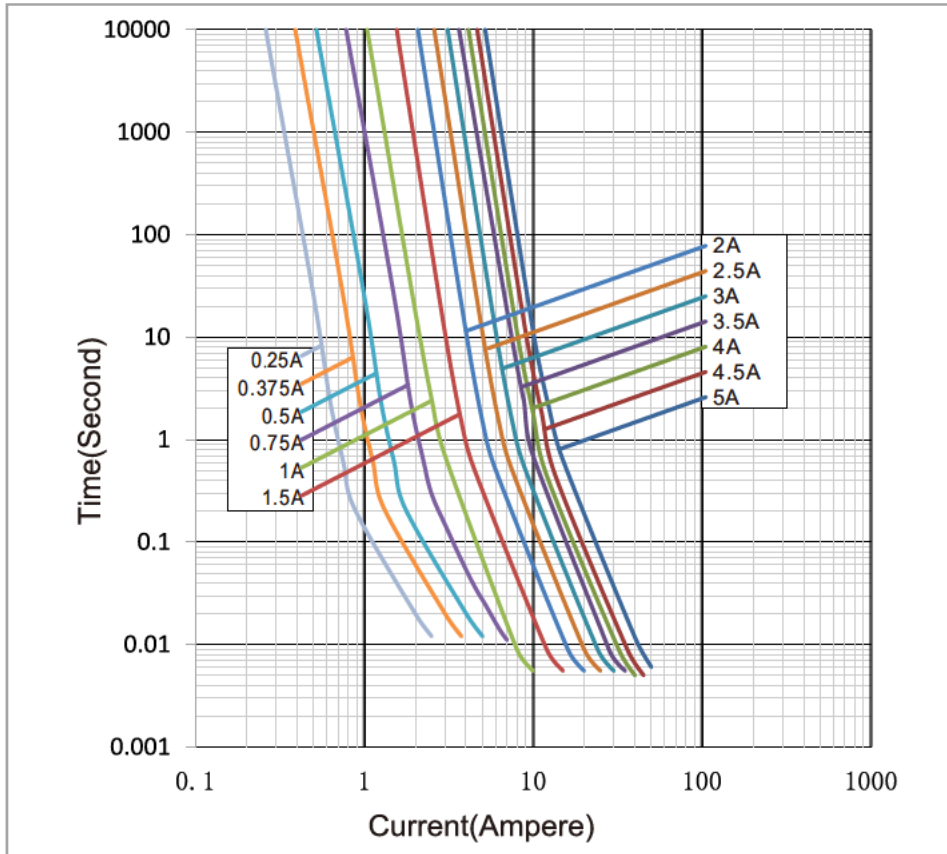


24Vdc Packaging

3,000 pieces of fuses in plastic or paper taper (3000pcs)

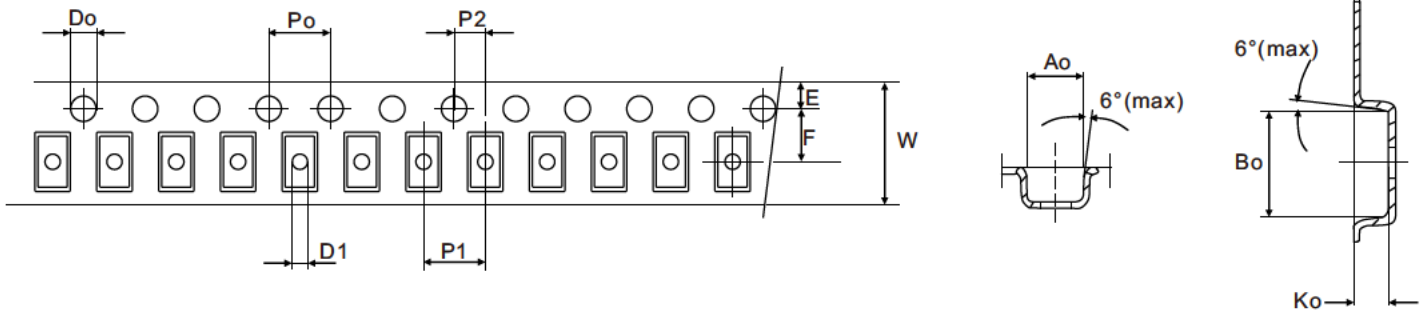

Symbol	Ao	Bo	Ko	Po	P1	P2
Spec	1.80±0.10	3.50±0.10	1.27±0.10	4.00±0.10	4.00±0.10	2.00±0.10
Symbol	E	F	Do	D1	W	T
Spec	1.75±0.10	3.50±0.10	1.50±0.10	1.00(Max)	8.00±0.10	0.25±0.05

(Unit: mm)

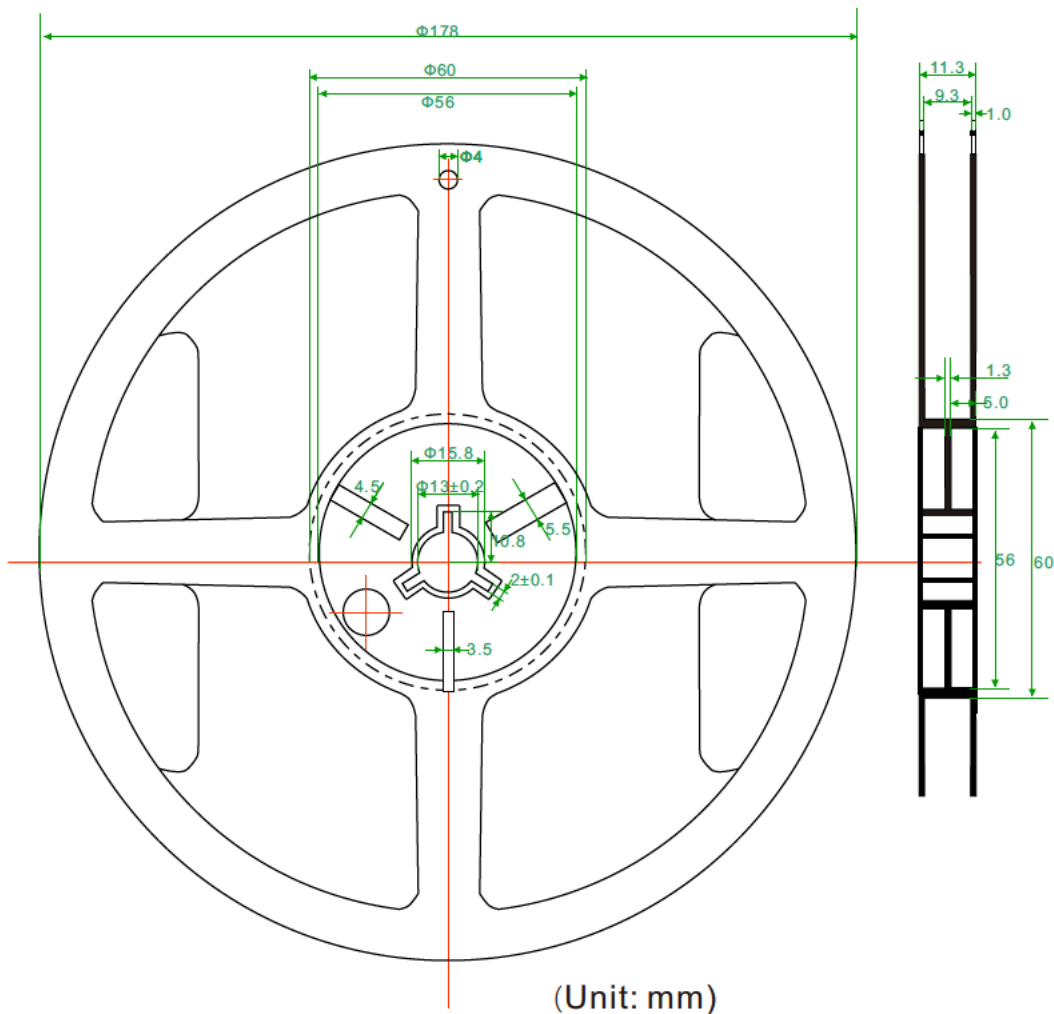

(Unit: mm)