

● General Specifications

- ⌚ Material ----- Frame:Plastics (Flammability:UL94V-0)
Impeller:Plastics (Flammability:UL94V-0)
- ⌚ Lead Wire ----- + Red - Black (Sensor) Yellow (Control) Brown
- ⌚ Life time -----25000 Hours Sleeve bearing
50000 Hours Ball bearing
- ⌚ Storage Temperatur--- -30°C ~ +70°C (Non-condensing)
- ⌚ Bearing Type----- Ball Bearings Sleeve
- ⌚ Speed Range----- ±10%
- ⌚ Part Numbering System

SFD-BB9733H12- **B R 1**

Waterproof level:0=no,1=IP55,2=IP68

Sensor: 0=no,R=RD sensor ,F=FG sensor ,P=PWM sensor ,T=Temperature sensor


Bearing:S=sleeve bearing,B=ball bearing,Y=superflo bearing,L=long life bearing



97 X 97 X 33mm (Mass:155g)

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt	R.P.M	M3/min	CFM	MmH2O	IN H2O	dB-A
FAN-BB9733L12	12	7.2-13.8	0.33	3.96	2750	0.540	19.06	12.69	0.499	45.0
FAN-BB9733M12			0.59	7.08	3300	0.640	22.60	19.00	0.747	49.5
FAN-BB9733H12			0.82	9.84	3800	0.720	25.42	25.40	0.999	52.5
FAN-BB9733HH12			1.15	13.8	4200	0.802	28.24	32.95	1.288	56.0
FAN-BB9733L24	24	14.5~27.5	0.17	4.08	2750	0.540	19.06	12.69	0.499	45.0
FAN-BB9733M24			0.28	3.36	3300	0.640	22.60	19.00	0.747	49.5
FAN-BB9733H24			0.42	10.08	3800	0.720	25.42	25.40	0.999	52.5
FAN-BB9733HH24			0.57	13.68	4200	0.802	28.24	32.95	1.288	56.0

● Dimensions(unit:mm/inch)

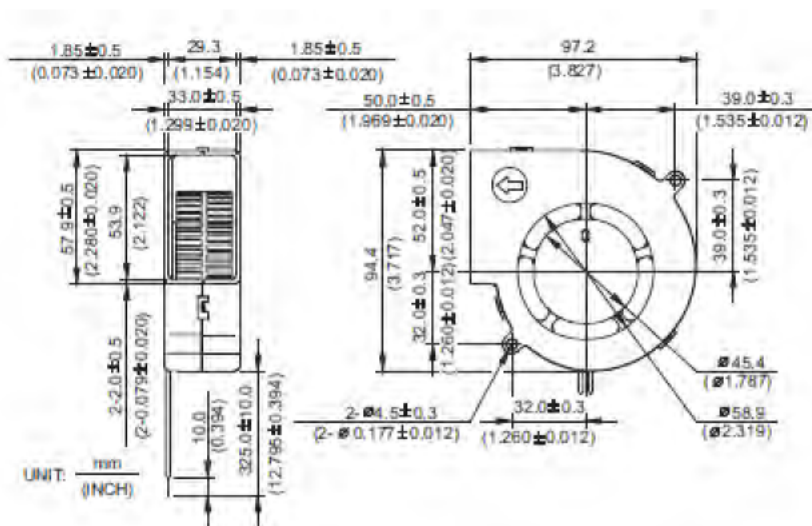

● Air Flow-Static Pressure Characteristics

