

## ● General Specifications

- ⌚ Material ----- Frame:Plastics (Flammability:UL94V-0)  
Impeller:Plastics (Flammability:UL94V-0)
- ⌚ Lead Wire ----- + Red - Black (Sensor) Yellow (Control) Brown
- ⌚ Life time -----25000 Hours Sleeve bearing  
50000 Hours Ball bearing
- ⌚ Storage Temperatur--- -30°C ~ +70°C (Non-condensing)
- ⌚ Bearing Type----- Ball Bearings Sleeve
- ⌚ Speed Range----- ±10%
- ⌚ Part Numbering System

SFD-FB0612ME- B R 1

Waterproof level:0=no,1=IP55,2=IP68

Sensor: 0=no,R=RD sensor ,F=FG sensor ,P=PWM sensor ,T=Temperature sensor


Bearing:S=sleeve bearing,B=ball bearing,Y=superflo bearing,L=long life bearing



**60 X 60 X 38 mm ( Mass: 90g)**

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt		M3/min	CFM	MmH2O	IN H2O	
FAN-FB0612LE	12	7.5~13.2	0.18	2.16	5500	0.816	28.81	7.76	0.306	38
FAN-FB0612ME			0.40	4.8	6500	0.972	34.34	11.23	0.442	43
FAN-FB0612HE			0.55	6.6	7500	1.139	40.22	15.18	0.598	48
FAN-FB0612HHE			0.82	9.84	8500	1.307	46.17	20.14	0.793	52
FAN-FB0612VHE			1.05	12.6	9500	1.481	52.30	25.71	1.012	54.5
FAN-FB0612SHE			1.25	15	11500	1.651	58.32	32.50	1.280	57.5
FAN-FB0612EHE			1.60	19.2	12500	1.796	63.44	37.55	1.478	61
FAN-FB0624LE	24	14.5~27.5	0.16	3.84	5500	0.816	28.81	7.76	0.306	38
FAN-FB0624ME			0.25	6	6500	0.972	34.34	11.23	0.442	43
FAN-FB0624HE			0.32	7.68	7500	1.139	40.22	15.18	0.598	48
FAN-FB0624HHE			0.48	11.52	8500	1.307	46.17	20.14	0.793	52

## ● Dimensions(unit:mm/inch)

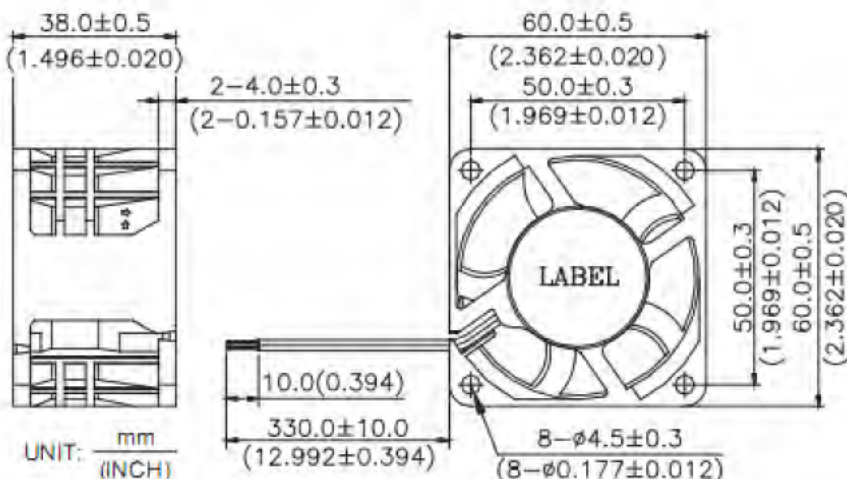

## ● Air Flow-Static Pressure Characteristics

