

● General Specifications

- ⌚ Material ----- Frame:Die-cast Aluminun
Impeller:Plastics (Flammability:UL94V-0)
- ⌚ Lead Wire ----- + Red - Black (Sensor) Yellow (Control) Brown
- ⌚ Life time -----50000 Hours Ball bearing
- ⌚ Storage Temperatur--- -30°C ~ +70°C (Non-condensing)
- ⌚ Bearing Type----- Ball Bearings Sleeve
- ⌚ Speed Range----- ±10%
- ⌚ Part Numbering System



SFD-FB25489L24- B R 1

Waterproof level:0=no,1=IP55,2=IP68


Sensor: 0=no,R=RD sensor ,F=FG sensor ,P=PWM sensor ,T=Temperature sensor

Bearing:S=sleeve bearing,B=ball bearing,Y=superflo bearing,L=long life bearing

254 X 89mm (Mass: 2400g)

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt	R.P.M	M3/min	CFM	Pa	IN H2O	dB-A
FAN-FB25489L24	24	7.2-13.8	1.55	37.2	1700	16.12	575.8	162.3	0.69	43.0
FAN-FB25489M24			2.35	56.4	2200	20.95	752.4	213.6	0.86	56.0
FAN-FB25489H24			3.65	87.6	2800	26.25	910.6	273.1	1.08	69.0
FAN-FB25489L48	48	14.5~27.5	0.85	40.8	1700	16.12	575.8	162.3	0.69	43.0
FAN-FB25489M48			1.25	60.0	2200	20.95	752.4	213.6	0.86	56.0
FAN-FB25489H48			2.05	98.4	2800	26.25	910.6	273.1	1.08	69.0

● Dimensions(unit:mm/inch)

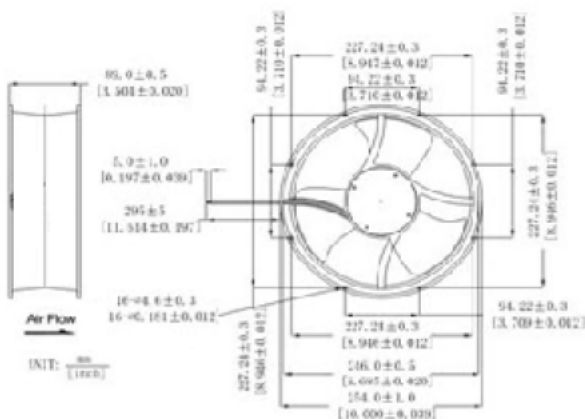

● Air Flow-Static Pressure Characteristics

