

General Specifications

- ⌚ Material ----- Impeller:Plastic(UL 94V-0)
Pillow:Die-Cast Aluminum
- ⌚ Lead Wire ----- + Red - Black (Sensor) Yellow (Control) Brown
- ⌚ Life time -----50000 Hours Ball bearing
- ⌚ Storage Temperatur--- -25°C ~ +70°C (Non-condensing)
- ⌚ Bearing Type----- Ball Bearings
- ⌚ Speed Range----- ±5%
- ⌚ Part Numbering System

SFD-KF175B24H- B R 1

Waterproof level:0=IP44,1=IP55,2=IP68

Sensor: 0=no,R=RD sensor ,F=FG sensor ,P=PWM sensor ,T=Temperature sensor


Bearing:S=sleeve bearing,B=ball bearing



Φ175 mm backward curved

Model No.	Rated Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure	Noise
	VDC	AMP	Watt	R.P.M	M3/h	CFM	Pa	dB-A
FAN-KF175B24H	24	3.5	84	4000	660	410	400	72
FAN-KF175B48H	48	1.6	76.8	4000	660	410	400	72

Air Flow-Static Pressure Characteristics

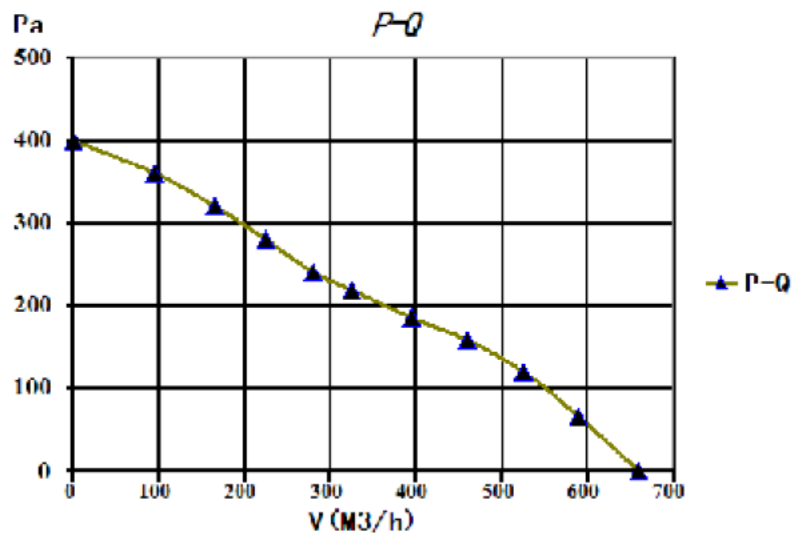

Dimensions(unit:mm/inch)

