

### ● General Specifications


- ⌚ Material ----- Frame:Aluminum  
Impeller:Plastics (Flammability:UL94V-0 rating)
- ⌚ Dielectric Strength ----- 50/60Hz 1500VAC 1minute
- ⌚ Life time -----15000 Hours Sleeve bearing  
30000 Hours Ball bearing
- ⌚ Storage Temperatur--- -30°C ~ +70°C (Non-condensing)
- ⌚ Bearing Type----- Ball Bearings Sleeve
- ⌚ Speed Range----- ±10%
- ⌚ Part Numbering System  
SFD-AC18060H 220 B - 1
- Waterproof level:1=IP55,2=IP68
- Bearing:S=sleeve bearing,B=ball bearing
- AC Voltage: 110=100-125V、220=220-240V



### 180 X 180 X 60mm ( Mass1010g)

Model No.	Voltage (v)	Frequ ency	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure	Noise
	VAC	HZ	A/MP	Watt	R.P.M	M3/min	CFM	IN H2O	dB-A
FAN-AC18060H110B	100~125	50/60	0.8/0.9	63.5	2550/2800	7.45/9.15	265/325	0.71/0.86	60/64
FAN-AC18060H220B	220~240	HZ	0.43/0.48	68.2	2550/2800	7.45/9.15	265/325	0.71/0.86	60/64

### ● Dimensions(unit:mm/inch)

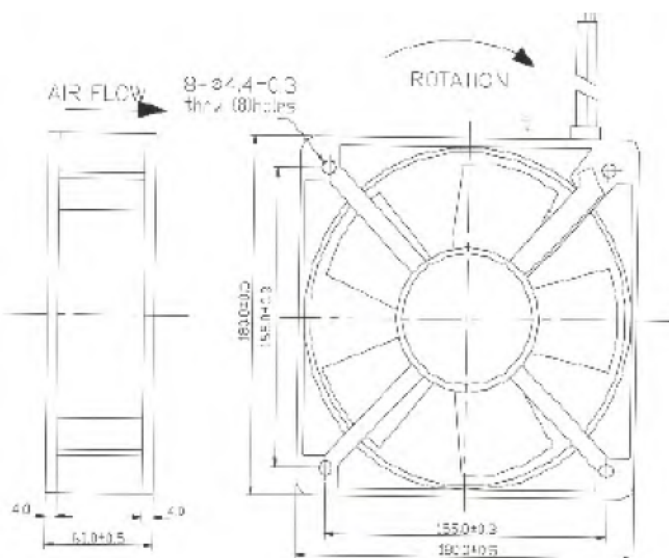

### ● Air Flow-Static Pressure Characteristics

